



# High Performance Air-Conditioning 2015



CE  
50Hz  
15KX02E  
EU/EEA

New **KXZ**

VRF inverter multi-system Air-Conditioners

# High Performance Air-Conditioning 2015



New

## KXZ

INSTALLATION FLEXIBILITY

KXZ Product Line is extended up to 60HP  
with combination of 3 outdoor units





## Line Up



*Micro* model

**KXZ Lite**

**KXZ**

## Contents

<b>Introduction</b>	4 ~ 15
<b>Outdoor units</b>	16 ~ 55
<b>Indoor units</b>	56 ~ 91
<b>EEV-KIT</b>	92 · 93
<b>Control systems</b>	94 ~ 103
<b>Standard Large connection</b>	104 ~ 107
<b>Water cooled series</b>	108 · 109
<b>High Head series</b>	110 ~ 113
<b>Refresh series</b>	114 · 115
<b>Further information</b>	116 ~ 119



## Product Line Up

Product lineup has been extended up to 60HP with combination of 3 outdoor units.

Furthermore Hi-COP series has been added to our advanced technology.

Previous  
Up to 48HP



**KXZE1**  
Up to 60HP

**KXZXE1**  
8~36HP

### <Outdoor units>

from 11.2kW up to 168.0kW

Capacity	4HP	5HP	6HP	8HP	10HP	12HP	14HP	16HP	17HP	18HP	20HP
Model Code : kW	11.2	14	15.5	22.4	28	33.5	40.0	45.0	47.5	50.0	56.0
BTU / h	38,200	47,800	52,900	76,400	95,500	114,300	136,500	153,500	162,100	170,600	191,100
kcal / h	9,600	12,000	13,300	19,300	24,100	28,800	34,400	38,700	40,900	43,000	48,200

Capacity	22HP	24HP	26HP	28HP	30HP	32HP	34HP	36HP	38HP	40HP
Model Code : kW	61.5	67.0	73.5	80.0	85.0	90.0	95.0	100.0	106.0	112.0
BTU / h	209,800	228,600	250,800	273,000	290,000	307,100	324,100	341,200	361,700	382,100
kcal / h	52,890	57,600	63,200	68,800	73,100	77,400	81,700	86,000	91,200	96,300

Capacity	42HP	44HP	46HP	48HP	50HP	52HP	54HP	56HP	58HP	60HP
Model Code : kW	120.0	125.0	130.0	135.0	142.5	145.0	150.0	156.0	162.0	168.0
BTU / h	409,400	426,500	443,600	460,600	486,200	494,700	511,800	532,200	552,700	573,200
kcal / h	103,200	107,500	111,800	116,100	122,600	124,700	129,000	134,200	139,300	144,500

### Micro model



**NEW**

### KXZ Lite



4HP	5HP	6HP
FDC112KXEN6	FDC140KXEN6	FDC155KXEN6
FDC112KXES6	FDC140KXES6	FDC155KXES6

□ 1-phase 220-240V

■ 3-phase 380-415V

8HP	10HP	12HP
FDC224KXE6	FDC280KXE6	FDC335KXE6

8HP	10HP
FDC224KXZPE1	FDC280KXZPE1



**NEW**

**Standard model KXZE1**



10HP	12HP	14HP	16HP
FDC280KXZE1	FDC335KXZE1	FDC400KXZE1	FDC450KXZE1

17HP	18HP	20HP
FDC475KXZE1	FDC500KXZE1	FDC560KXZE1



22HP	24HP	26HP	28HP	30HP	32HP
FDC615KXZE1	FDC670KXZE1	FDC735KXZE1	FDC800KXZE1	FDC850KXZE1	FDC900KXZE1
10+12	12+12	12+14	14+14	14+16	16+16
FDC280KXZE1 FDC335KXZE1	FDC335KXZE1 FDC335KXZE1	FDC335KXZE1 FDC400KXZE1	FDC400KXZE1 FDC400KXZE1	FDC400KXZE1 FDC450KXZE1	FDC450KXZE1 FDC450KXZE1

34HP	36HP	38HP	40HP
FDC950KXZE1	FDC1000KXZE1	FDC1060KXZE1	FDC1120KXZE1
17+17	18+18	18+20	20+20
FDC475KXZE1 FDC475KXZE1	FDC500KXZE1 FDC500KXZE1	FDC500KXZE1 FDC560KXZE1	FDC560KXZE1 FDC560KXZE1



42HP	44HP	46HP	48HP	50HP	52HP
FDC1200KXZE1	FDC1250KXZE1	FDC1300KXZE1	FDC1350KXZE1	FDC1425KXZE1	FDC1450KXZE1
14+14+14	14+14+16	14+16+16	16+16+16	17+17+17	17+17+18
FDC400KXZE1 FDC400KXZE1 FDC400KXZE1	FDC400KXZE1 FDC400KXZE1 FDC450KXZE1	FDC400KXZE1 FDC450KXZE1 FDC450KXZE1	FDC450KXZE1 FDC450KXZE1 FDC450KXZE1	FDC475KXZE1 FDC475KXZE1 FDC475KXZE1	FDC475KXZE1 FDC475KXZE1 FDC500KXZE1

54HP	56HP	58HP	60HP
FDC1500KXZE1	FDC1560KXZE1	FDC1620KXZE1	FDC1680KXZE1
18+18+18	18+18+20	18+20+20	20+20+20
FDC500KXZE1 FDC500KXZE1 FDC500KXZE1	FDC500KXZE1 FDC500KXZE1 FDC560KXZE1	FDC500KXZE1 FDC560KXZE1 FDC560KXZE1	FDC560KXZE1 FDC560KXZE1 FDC560KXZE1

**NEW**

**Hi-COP model KXZXE1**



8HP	10HP	12HP
FDC224KXZXE1	FDC280KXZXE1	FDC335KXZXE1



16HP	18HP	20HP	22HP	24HP
FDC450KXZXE1	FDC500KXZXE1	FDC560KXZXE1	FDC615KXZXE1	FDC670KXZXE1
8+8	8+10	10+10	10+12	12+12
FDC224KXZXE1 FDC224KXZXE1	FDC224KXZXE1 FDC280KXZXE1	FDC280KXZXE1 FDC280KXZXE1	FDC280KXZXE1 FDC335KXZXE1	FDC335KXZXE1 FDC335KXZXE1



26HP	28HP	30HP	32HP	34HP	36HP
FDC735KXZXE1	FDC800KXZXE1	FDC850KXZXE1	FDC900KXZXE1	FDC950KXZXE1	FDC1000KXZXE1
8+8+10	8+10+10	10+10+10	10+10+12	10+12+12	12+12+12
FDC224KXZXE1 FDC224KXZXE1 FDC280KXZXE1	FDC224KXZXE1 FDC280KXZXE1 FDC280KXZXE1	FDC280KXZXE1 FDC280KXZXE1 FDC280KXZXE1	FDC280KXZXE1 FDC280KXZXE1 FDC335KXZXE1	FDC280KXZXE1 FDC335KXZXE1 FDC335KXZXE1	FDC335KXZXE1 FDC335KXZXE1 FDC335KXZXE1



## <Indoor units>

### Wide variety of 17 types 92 models

A range of 17 types of exposed or concealed indoor units available in a wide range of capacities (total 92 indoor models). The best solution of indoor units for all applications is available from our full lineup.




### Indoor units lineup

Type			Capacity		0.5HP	0.8HP	1HP	1.25HP	1.6HP	2HP	2.5HP	3.2HP	4HP	5HP	6HP	8HP	10HP
			Model Code : kW		15	22	28	36	45	56	71	90	112	140	160	224	280
Ceiling Cassette	4way	FDT				●	●	●	●	●	●	●	●	●			
	4way Compact (600 x 600)	FDTC		●	●	●	●	●	●								
	2way	FDTW				●		●	●	●	●	●	●				
	1way	FDT5						●		●							
	1way Compact	FDTQ			●	●	●										
Duct Connected	High Static Pressure	FDU						●	●	●	●	●	●	●	●	NEW	NEW
	Low/Middle Static Pressure	FDUM			●	●	●	●	●	●	●	●	●	●			
	Low Static Pressure (thin)	FDUT		●	●	●	●	●	●								
	Compact & Flexible	FDUH			●	●	●										
Wall Mounted		FDK			●	●	●	●	●	●							
Ceiling Suspended		FDE					●	●	●	●		●	●				
Floor Standing	2way	FDW				●		●	●								
	with casing	FDL								●							
	without casing	FDU				●		●	●	●							
OA Processing unit		FDU-F										NEW		NEW		NEW	NEW
Type			Air flow M³/h	150	250	350	500	650	800	850	1000	1300	1800				
Fresh Air Ventilation and Heat Exchange unit		SAF		●	●	●	●	●	●		●						
Fresh Air DX Assembly		SAF-DX			●	●	●		●		●						

# 1. High Efficiency & Compact Design


High efficiency and compact design are realized by applying various advanced components

10~60HP (KXZ)

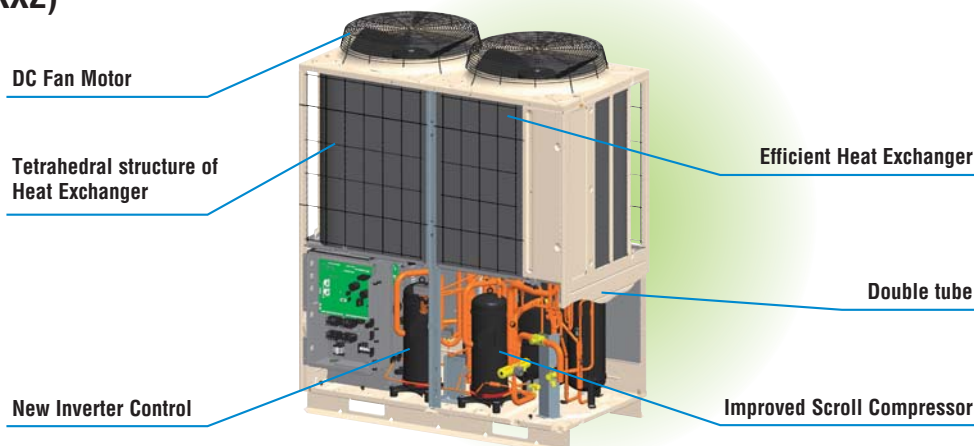

## Multiport compressor that achieves high efficiency (KXZ, KXZ Lite)


The new multiport discharge area in the compressor has optimized pressure control with better balancing. The performance improvement at medium Hz has resulted in higher annual efficiencies.

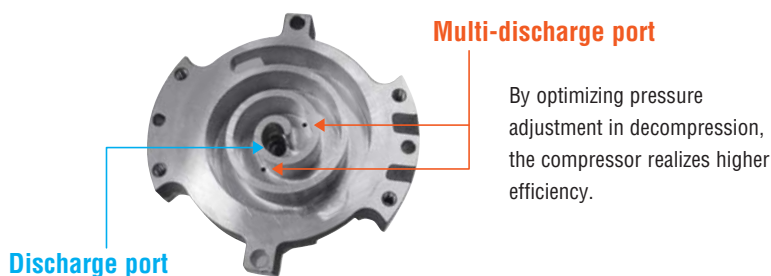

## Concentrated winding motor achieves "High Output" and "Total Efficiency Improvement"

The newly designed high performance CPU enables high precision optimization for compressor speed, which leads to concentrated winding motor use.

Our product achieves high output and better energy saving effects and in particular improves seasonal efficiency rating.

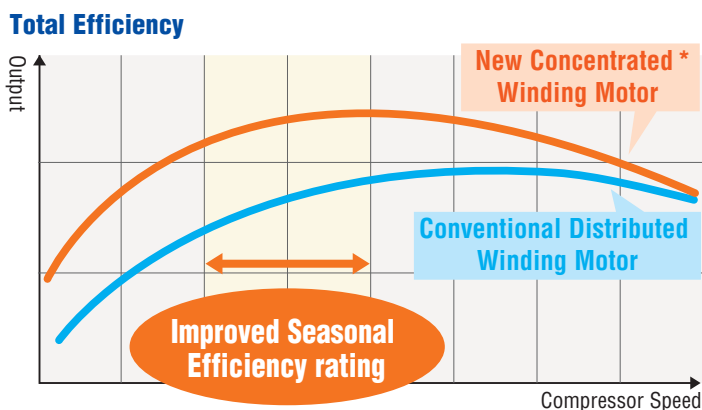


\*Applied for KXZE1:10/12/17/18/20HP, KXZE1:8HP & KXZ Lite:8/10HP





## Improved Heat-exchanger

With piping layout rearranged from header to heat exchanger, refrigerant distribution flow has improved and maximum energy efficiency has been achieved. Heat exchanger has improved refrigerant distribution and increased effectiveness. Furthermore due to expansion of effective heat transfer area in heat exchanger, energy efficiency has increased.

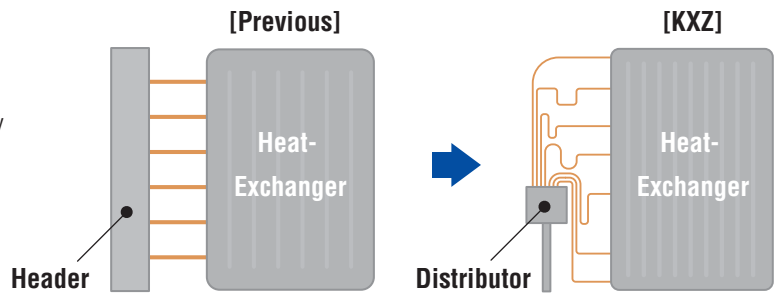


## Strengthened resistance against frost

Resistance against frost has been strengthened by achieving improved heat-exchanger.


## VTCC : Variable Temperature and Capacity Control (KXZ)

### Normal operation (in the cooling mode)

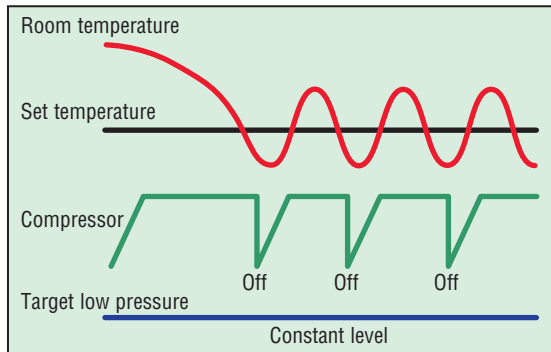

Target low pressure was set at the constant level. When room temperature got closer to set temperature, the compressor shifted operation and repeated on-off operation continuously.

### Energy saving operation (in the cooling mode)

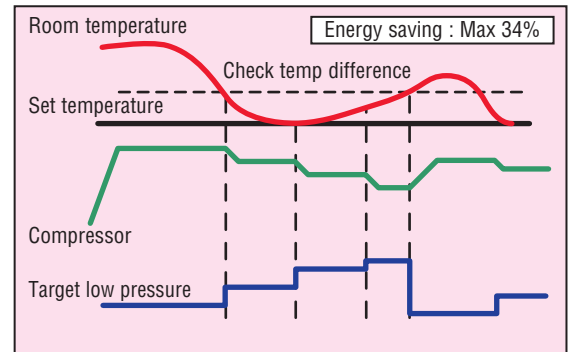


Checking the difference between room and set temperatures, the system adjusts compressor speed and target low pressure effectively. Meeting customer's requirement, manual adjustment is available.

(Need to set 7-segment or external input)



## Oil level control capability

Our proprietary technology of adjusting oil level for combination of two or three outdoor units has realized leveled operation rate, keeping performance of the units and ensuring long life of the system.

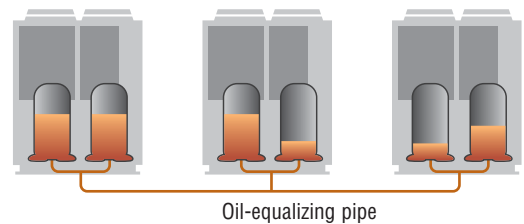

## Capacity control (KXZ)

Capacity control can be set by peak cut function with RC-EX1A for better energy saving. Five-step capacity control is available. (100-80-60-40-0%)

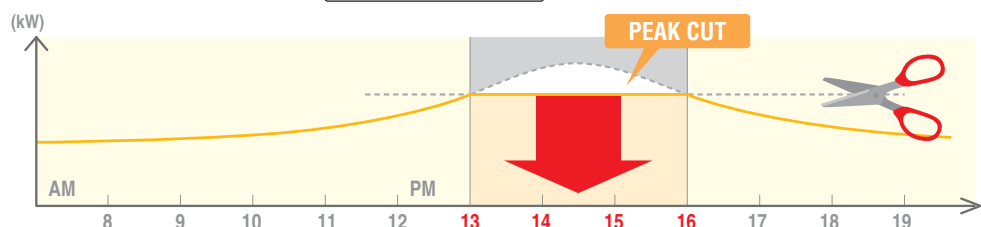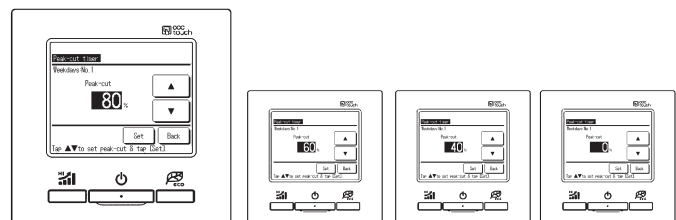


## Vector control

New applied Vector control has a high efficiency and many new advanced features.


- Smooth operation from low speed to high speed
- Smooth Sine Voltage Wave form are attained
- Energy efficiency is further improved in low speed range

### Vector Control

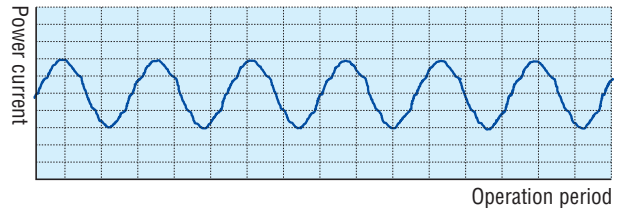


## Long-chorded 3 propeller fan with serration

Fan blade design adapted from MHI's aerospace division - with serrated edges that deliver increased air volume with less power input.

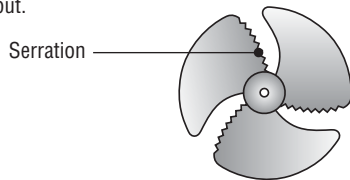


## DC Fan Motor

Employment of DC fan motor has enabled to realize an excellent efficiency of approximate 60% higher than previous models.

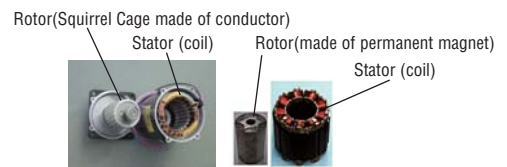

## 4~6HP (Micro)

### New Twin Rotary Compressor



### Compact High Efficient Heat Exchanger


### New Inverter Control

Vector Inverter Control system

### DC Fan Motor

Compact & High efficiency


### Optimum New Refrigerant System Control

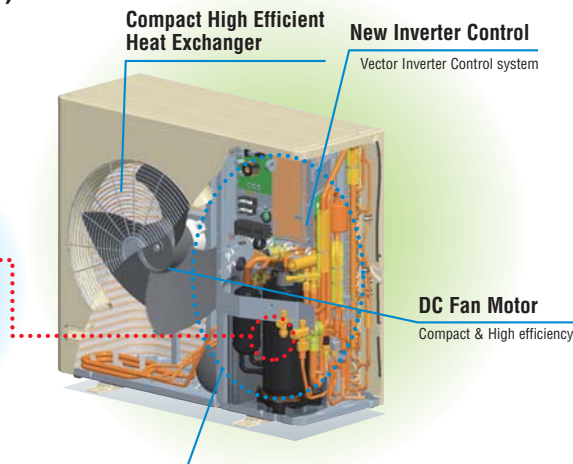


## Compact high efficiency Heat Exchanger

- Optimizing relationship of the air flow velocity & fin pattern
- Improvement of air distribution Maximizing efficiency of heat exchanger

### Heat Exchanger

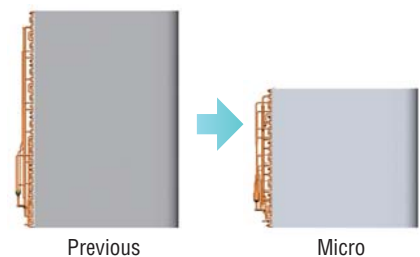

## 8~12HP (Micro)

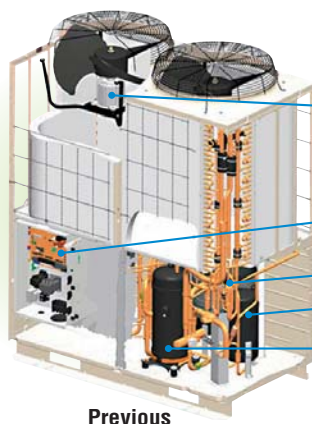

### New DC Fan motor

Compact & High efficiency

### New Inverter Control


Compact & Vector Inverter Control system

### Downsized accumulator

### Receiver in fan section

### 3D-Scroll Compressor(12HP)

Previous

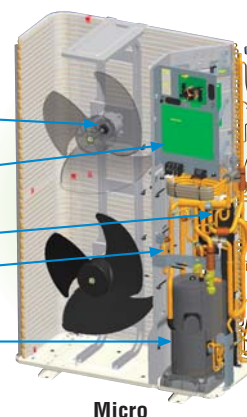

Micro




## 2. Design Flexibility

### Indoor unit capacity connection

	HP	Capacity connection
Micro model	4~12	<b>150%</b>
KXZ Lite	8 · 10	<b>120%</b>
KXZE1	10~60	<b>130%</b>

Capacity connection of Hi-COP KXZE1 series & KXZ Standard large connection series is 160~200%. Please refer to page 32 & 104 for the detail.

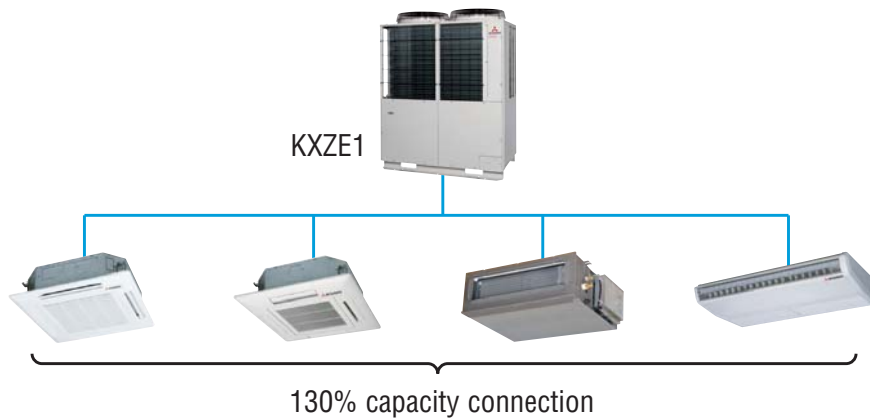

### Connectable indoor units

Micro model	HP	4	5	6	8	10	12								
	Numbers	6	8	8	22	24	24								
KXZ Lite	HP	8	10												
	Numbers	8	8												
Standard KXZE1	HP	10	12	14	16	17	18	20	22	24	26	28	30	32	34
	Numbers	24	29	34	39	41	43	48	53	58	63	69	73	78	80
	HP	36	38	40	42	44	46	48	50	52	54	56	58	60	
	Numbers	80	80	80	80	80	80	80	80	80	80	80	80	80	

### Control Systems

All series offer wide variation of control system and provide the best solution.


[Control system units with SUPERLINK- II]

Classification	Type	Model	Connectable Indoor units (Maximum)	Electric power calculation	
Individual controller	Wired	RC-E5	1	—	
		RC-EX1A	1	—	
	Wireless	RCN-T-36W-E etc.	1	—	
Center Console	Push buttons	SC-SL1N-E	16	—	
		SC-SL2NA-E	64	—	
	Touch screen	SC-SL4-AE	128	—	
		SC-SL4-BE	128	●	
	PC windows interface units	SC-WGWNB-A	128(64x2)	—	
		SC-WGWNB-B	128(64x2)	●	
	BMS interface units	BACnet	SC-BGWNA256-A	256(128x2)	—
			SC-BGWNA256-B	256(128x2)	●
			SC-BGWNA-A	128(64x2)	—
			SC-BGWNA-B	128(64x2)	●
Lonworks			SC-LGWNA-A	96(48x2)	—





## Long Pipe Length 10~60HP(KXZ)

Piping length has extended max height difference between indoor units up to 18m and enables us to put indoor units on extra three floors. The furthest indoor unit: 160m or total length: 1000m contributes to system design flexibility.

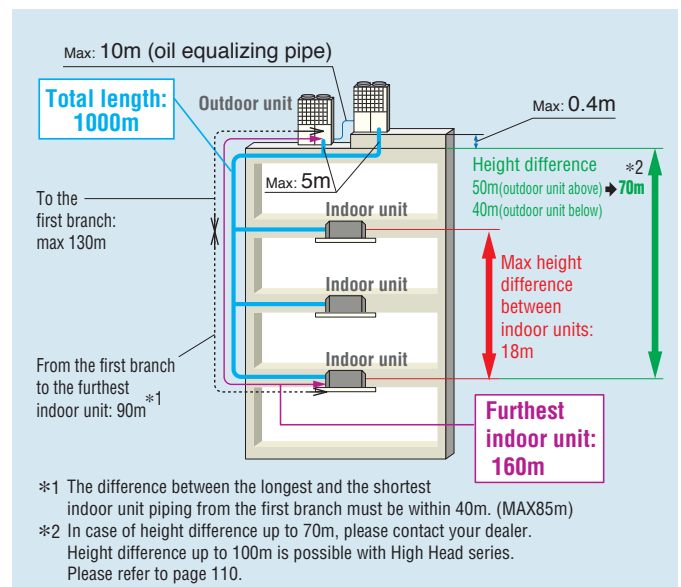


## Easy Transportation & Installation

Due to realization of significant reduction in size and foot print which is one of the smallest in the industry, transportation in an elevator made for six persons (Width:1400mm, Depth:850, Open area:800mm) is possible, eliminating cost of a crane and reducing labor.

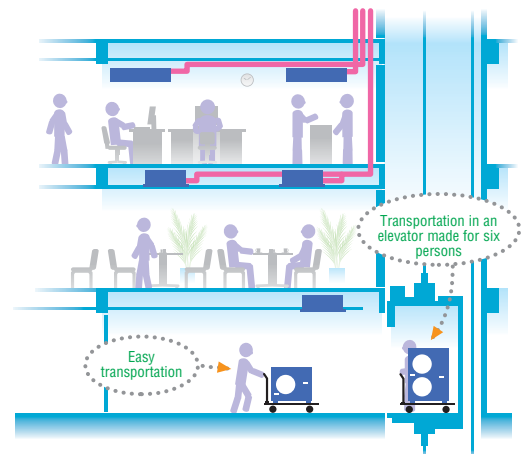


KXZ is portable and the uniform reduced footprint allows neat, continuous installation.



## Wide Range of Operation (KXZ, KXZ Lite)

KXZ series permits an extensible system design considering a heating range operation under a low temperature condition down to -20°C and a cooling range operation up to 46°C (previous model : 43°C) Furthermore KXZ Lite extends a cooling range operation up to 50°C.

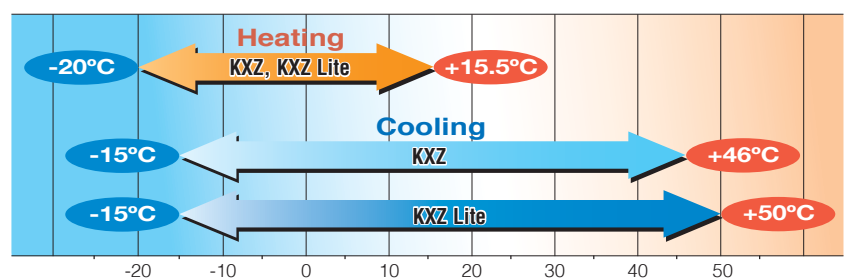



## Automatic Select functions for capacity control (KXZ Lite)

The following 3 items are available for capacity control function.

You can select one item individually or select 2or3 items at the same time.


In case of selecting 2or3 items, the unit will operate with the most effective function automatically.

### Compressor speed control

You can set compressor speed at 100%-80%-60%-40% before starting operation with PWB in the outdoor unit or with a demand controller (procured locally).

#### How to set “Compressor speed”

- **1** Set the function of external input (CNS1) to “Capacity control input” using P07 of 7SEG setting.
- **2** Set the Demand rate using SW4-7, 4-8 according to the following chart.
- The input signal will be through **3** CNS1. ON/ connected, OFF/ not connected

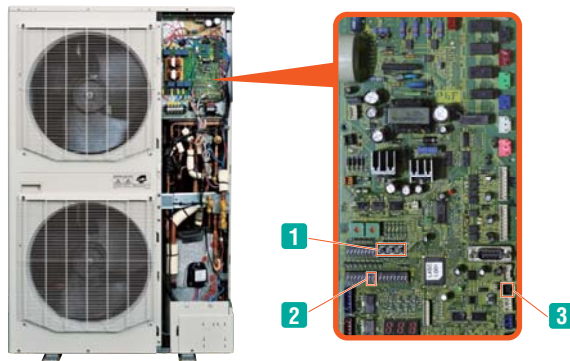

SW4-7	SW4-8	Compressor speed
OFF	OFF	80%
ON	OFF	60%
OFF	ON	40%
ON	ON	0%

### Capacity control timer


You can set capacity control with RC-EX1A up to 4 times per day maximum.  
The timer setting can be changed using 5 minute intervals.

※Please refer to page 8.

### Silent mode

Considering noise regulations or surrounding circumstances, you can now select 4 levels of silent mode. [ 1 ] & [ 2 ]  
Setting the combination of silent mode is available by using timer function of RC-EX1A.


- Silent mode [ 1 ] : Priority for capacity  
This is an effective function during low load operation conditions.  
This setting may be cancelled in overload conditions.
- Silent mode [ 2 ] : Priority for silent mode  
Regardless of operation conditions, the outdoor unit will keep the operation at the selected sound level.

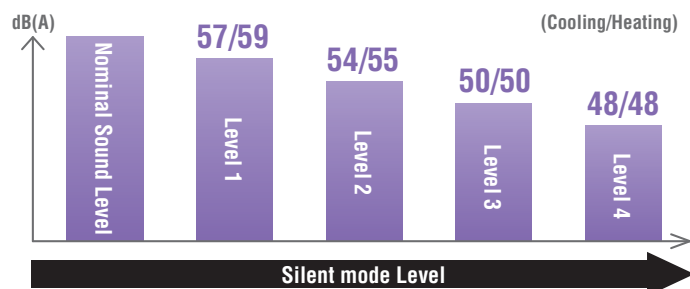

### 3. Serviceability


#### Easy Service

Quick and easy access to service parts by separation of compartments.

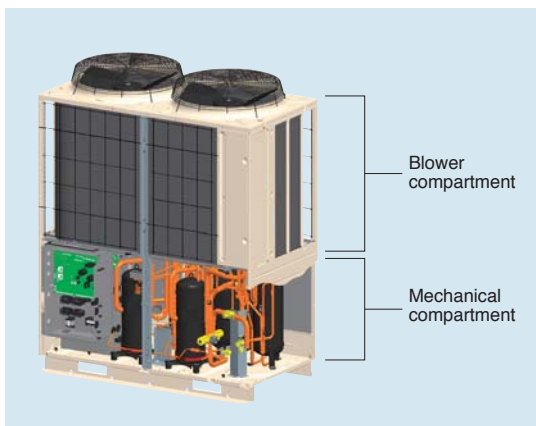

#### Check Operation (10~60HP)


Closing of Service valve, crossing connection of refrigerant piping and electrical wiring, proper operation of EEV (Electrical Expansion Valve) can be checked automatically in cooling operation. This check operation can be done at 0~43°C outdoor temperature and 10~32°C indoor temperature by use of outdoor unit dip switch. The check should be done in one refrigerant system. It takes 15~30 minutes and avoids frequent failure by preventing careless mistakes during installation.

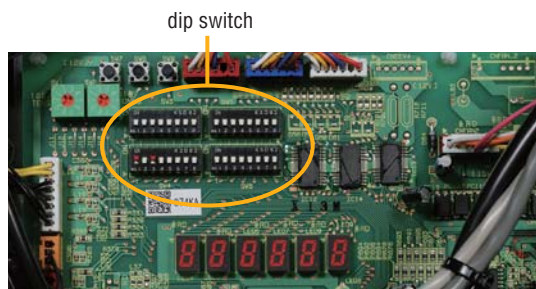

#### Monitoring Function

All series includes new feature to assist with servicing and trouble shooting. Various data can be monitored through 3-digit or 6-digit display on the outdoor unit PCB.

Detailed fault diagnosis and operation history memory via 7-segment display.




4~6HP  
8~10HP(KXZ Lite)




8~60HP

Equipped with RS232C for connection directly to your PC monitoring and service tasks made simple with our service software ("Mente PC").  
**All series**

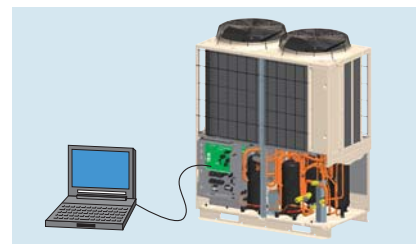


#### Back-up Operation

In the event that one unit has a failure, the system will keep operating with the other good units.

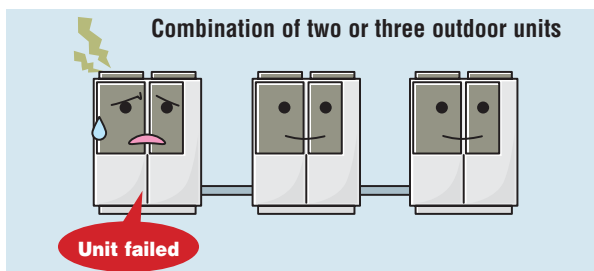

In the event that one compressor has a failure, the unit will keep operating with the another good compressor.

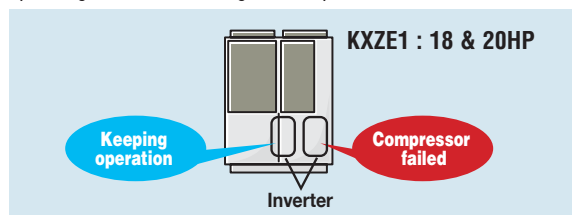

This operation is an emergency measure for a limited time and a necessary repair should be done as soon as possible.

#### 3 Layer Construction

Thanks to control box structure with 3 layer/2 layer construction using hinge connection, service and maintenance has been made much easier for inverter components.




KXZ  
(3 layer)



KXZ Lite  
(2 layer)

#### Blue Fin

Due to application of blue coated fins for the heat exchanger of new outdoor unit, corrosion resistance has been improved compared to current models.

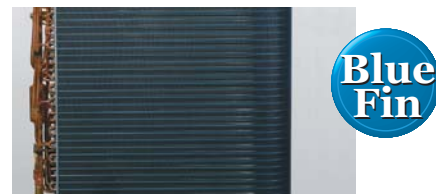






## Improved features (KXZ Lite)


### Improved freedom of piping layout

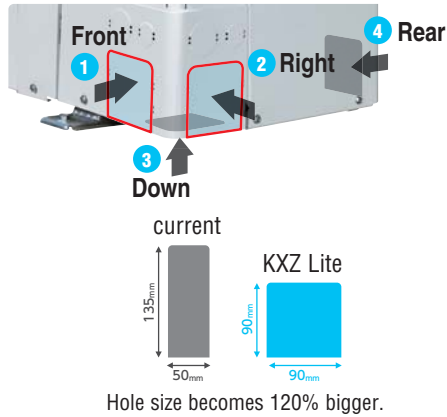


### Wire insertion holes for fall prevention



### External static pressure

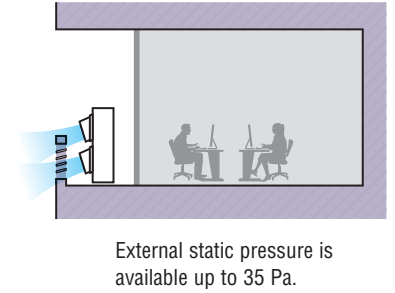


### Four handles

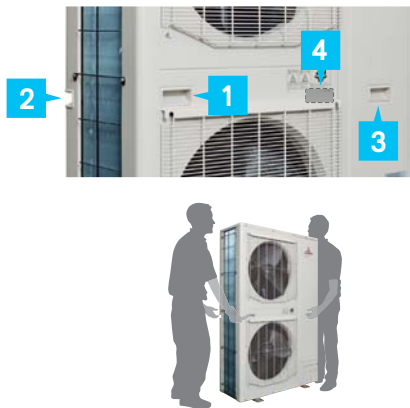


Located at the same level for easy transport and transfer.

### A transparent rain cover

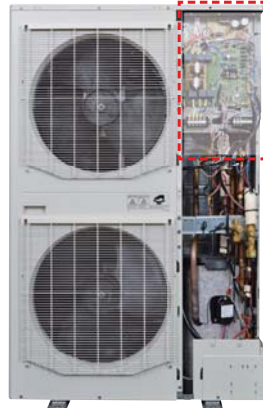


Attached as a standard for easy maintenance.

### Fixing screws to service panel

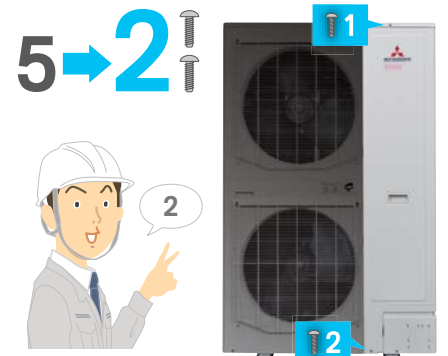

Decreasing number of screws from 5 to 2, installation & service speed is improved.

### Compact design

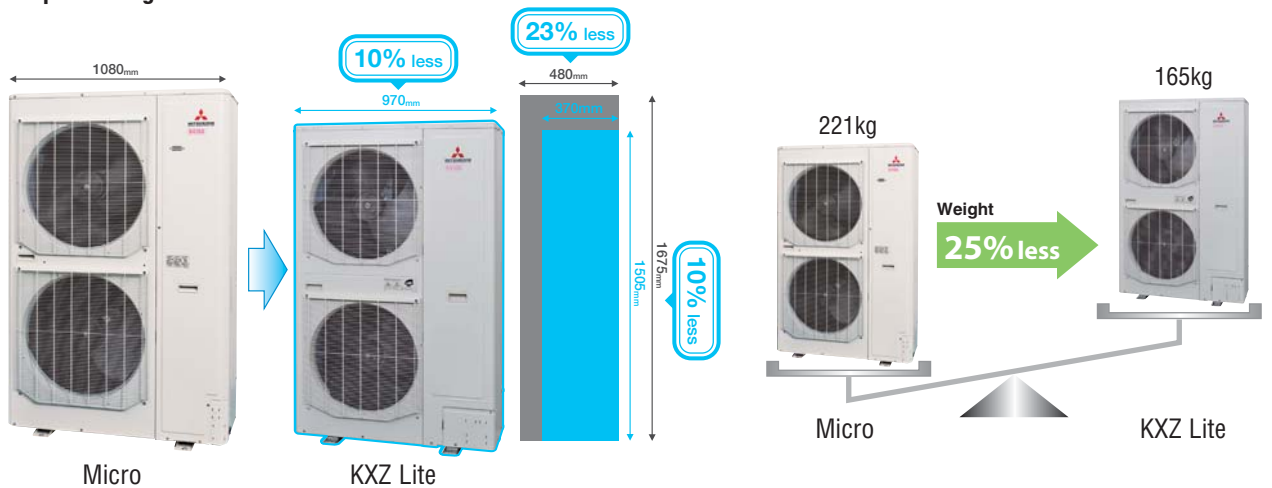


# Heat pump systems

The heat pump systems operate with 2 inter-connecting pipes, thus commonly referred to as a '2-pipe system'.

These systems provide either a heating or cooling operation to all indoor units and are suitable for a wide range of applications from an individual apartment to an entire multi storey building, especially where there are significant open plan areas to be controlled.

The range starts with a 11.2kW cooling capacity, up to 20HP with 56.0kW cooling capacity. Outdoor units can also be "twinned" or "tripled" providing up to 60HP/168.0kW on a single system.

The range has a total piping length of 1000m (KXZ) and the furthest indoor unit can be connected up to 160m (8HP+, KXZ, Micro) from the outdoor unit.

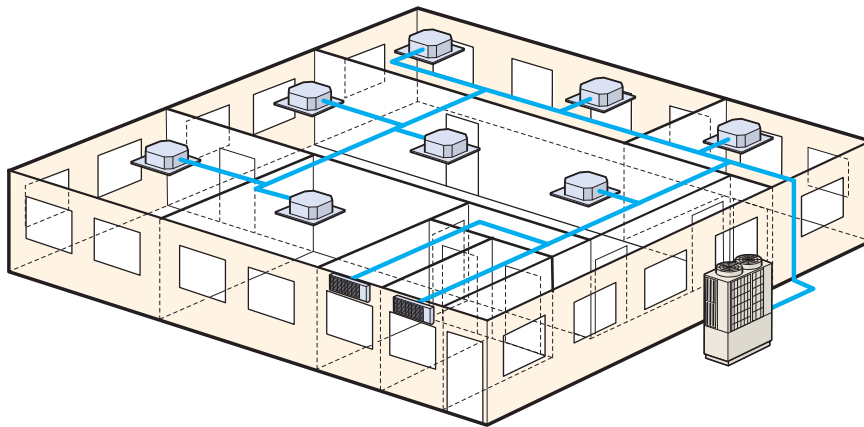

### Fixed Cooling mode/ fixed heating mode (summer/winter switch):

It is possible to fix the operational mode of the system (either cooling or heating) using a switch (SW3-7) on the outdoor unit PC board - this enables the building user to decide the operation of the system (e.g. cooling only in summer/heating only in winter), to avoid unnecessary energy wastage. It is also possible to wire the control switch to a remote location (inside the building) to a control room, or even linked to an ambient thermostat.


## Priority operation mode rule (KXZ, KXZ Lite)

You can select the following priority operation mode. (for whole system)

1. First unit's operation mode (by default setting)
2. Last unit's operation mode
3. Majority operation mode (see below)
4. Master operation mode (see below)


### <Majority operation mode>

The system is operated according to the mode selected by the majority of units in operation (whichever greater capacity between the sums of cooling mode and heating mode). The operation mode in minority is set to fan mode automatically.

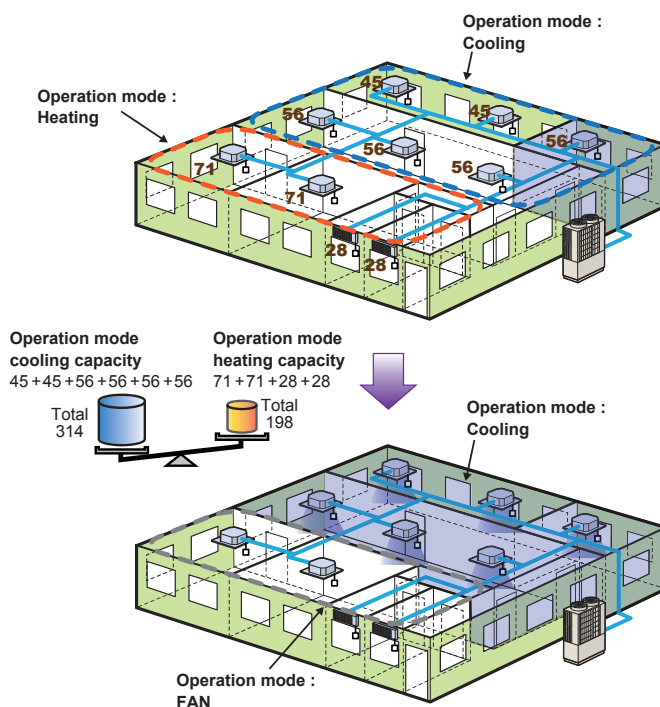

### <Master operation mode>

The system is operated according to master operation mode. When master operation mode is set at cooling mode, units selected as heating mode is set to fan mode automatically.

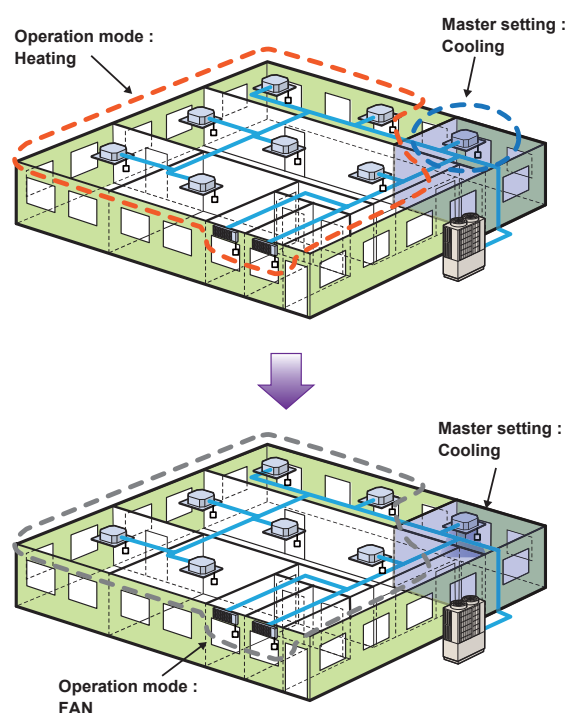




# Micro Outdoor units

## Heat pump systems 4, 5, 6HP (11.2kW~15.5kW)


Model No.	Nominal Cooling Capacity
FDC112KXEN6	11.2kW (1Phase)
FDC140KXEN6	14.0kW (1Phase)
FDC155KXEN6	15.5kW (1Phase)
FDC112KXES6	11.2kW (3Phase)
FDC140KXES6	14.0kW (3Phase)
FDC155KXES6	15.5kW (3Phase)



- These heat pump 2-pipe systems offer high performance VRF for applications that require either cooling only or heating only, ideal for open plan areas.
- Connect up to 8 indoor units/up to 150% capacity.
- High efficiency with COP (in cooling) up to 4.0.
- These units employ DC inverter compressors ONLY.
- Industry leading total piping length up to 100m and a maximum pipe run of 70m.

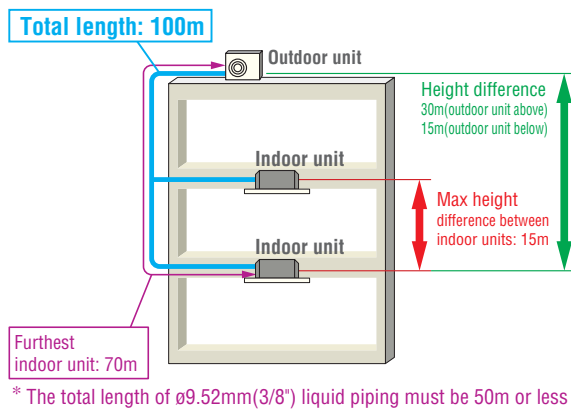

Range of operation

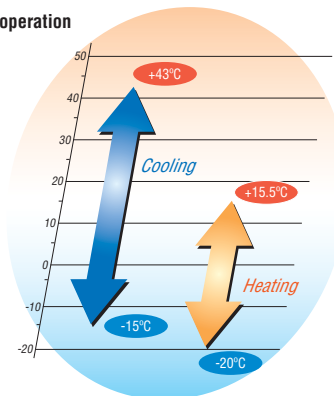

Note:FDUT15KXE6F-E and FDT15KXE6F can not be connected to the above systems.

## Specifications

Item	Model	FDC112KXEN6	FDC140KXEN6	FDC155KXEN6	FDC112KXES6	FDC140KXES6	FDC155KXES6	
Nominal horse power		4HP	5HP	6HP	4HP	5HP	6HP	
Power source		1 Phase 220-240V, 50Hz			3 Phase 380-415V, 50Hz			
Nominal capacity	Cooling	11.2	14.0	15.5	11.2	14.0	15.5	
	Heating	12.5	16.0	16.3	12.5	16.0	16.3	
Electrical characteristics	Starting current	5						
	Power consumption	Cooling	2.80	4.17	4.71	2.80	4.17	4.71
		Heating	2.89	4.31	4.38	2.89	4.31	4.38
	Running current	Cooling	13.5-12.4	20.6-18.9	23.3-21.3	4.5-4.1	6.9-6.3	7.8-7.1
Heating		14.1-12.9	21.5-19.7	21.9-20.1	4.7-4.3	7.2-6.6	7.3-6.7	
Exterior dimensions	HxWxD	mm 845x970x370						
Net weight	kg	85			87			
Refrigerant charge	R410A	kg 5.0						
Sound pressure level	Cooling/Heating	dB(A) 52/54	53/57	53/57	52/54	53/57	53/57	
Refrigerant piping size	Liquid line	mm(in) $\phi 9.52(3/8)$						
	Gas line	mm(in) $\phi 15.88(5/8)$						
Capacity connection	%	80~150						
Number of connectable indoor units		6	8	8	6	8	8	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.  
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

# Refrigerant piping

Outdoor unit (HP)	4	5	6
Gas pipe	Furthest indoor unit		ø15.88
Liquid pipe	≈<70m		ø9.52

Branch pipes



DIS-22-1G  
DIS-180-1G


Header pipe



HEAD4-22-1G  
HEAD6-180-1G

# Dimensions

All measurements in mm.

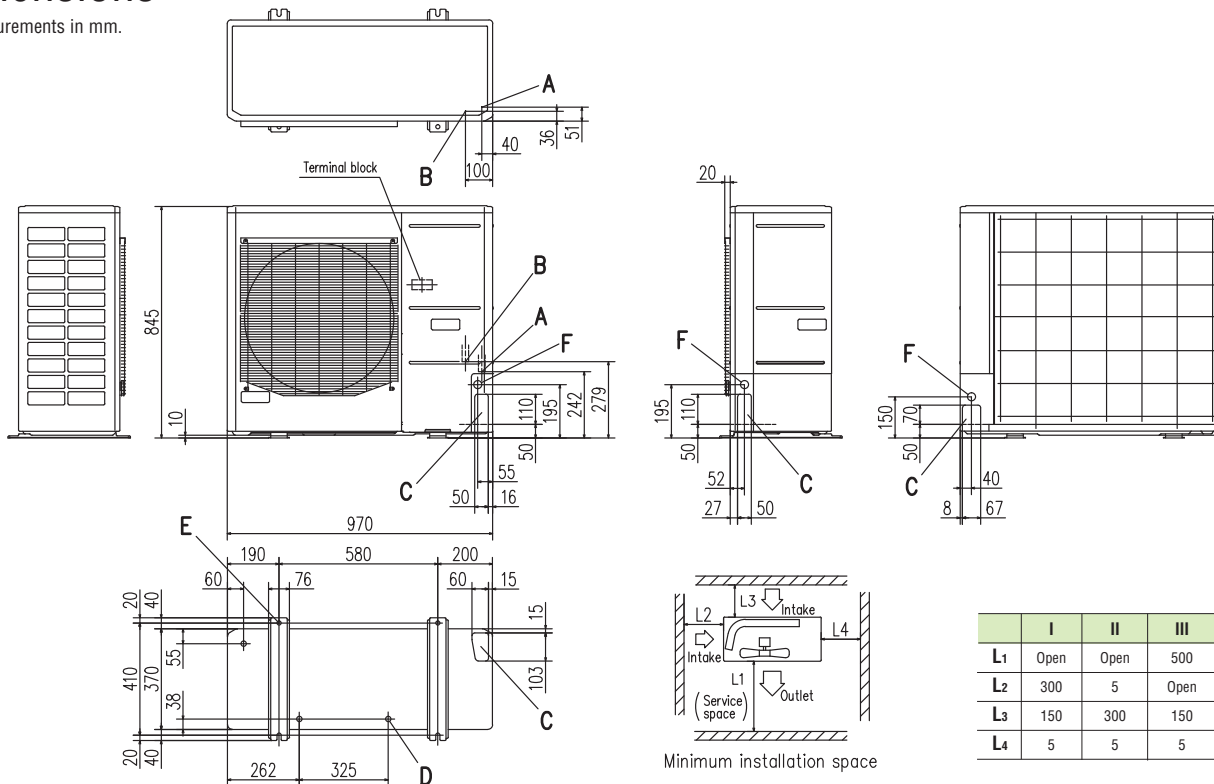

Mark	Content	
A	Service valve connection (gas side)	ø15.88 (5/8") (Flare)
B	Service valve connection (liquid side)	ø9.52 (3/8") (Flare)
C	Pipe/cable draw-out hole	
D	Drain discharge hole	ø20 x 3 places
E	Anchor bolt hole	M10 x 4 places
F	Cable draw-out hole	ø30 x 3 places

Notes:

- (1) It must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction.
- (4) Leave 1m or more space above the unit.
- (5) A wall in front of the blower outlet must not exceed the units height.
- (6) The model name label is attached on the lower right corner of the front panel.

<For EU/EEA area only>

Based on European regulations listed below, please refer the following specification table.

No.626/2011 of 4 May 2011: energy labeling of air-conditioners(below cooling capacity 12kW)

No.206/2012 of 6 March 2012: requirement for air-conditioners and comfort fans

## Specification table

Outdoor unit		FDC112KXEN6/112KXES6	
Indoor unit		FDT series only	FDT series & others
Energy class(cooling/heating)		A+/A+	C/A
SEER		6	4.3
SCOP(Average climate)		4.2	3.8
Pdesignnc	kW	11.2	
Pdesignh(@-10°C)	kW	9.5	
Annual energy consumption(cooling/heating)	kW	664/3212	910/3515
Sound power level	dB(A)	68	
Refrigerant (GWP)		R410A (1975)	
Designated heating season		Average	
Capacity combination	%	96.4~104.5	
Number of connectable indoor units		5	

R410A refrigerant contained in the products is a fluorinated greenhouse gas listed in Regulation (EU) No 517/2014.






# Micro Outdoor units

## Heat pump systems 8, 10, 12HP (22.4kW~33.5kW)

Model No.	Nominal Cooling Capacity
FDC224KXE6	22.4kW
FDC280KXE6	28.0kW
FDC335KXE6	33.5kW




- These heat pump 2-pipe systems offer high performance VRF for applications that require either cooling only or heating only, ideal for open plan areas.
- Connect up to 24 indoor units/up to 150% capacity.
- High efficiency with COP (in cooling) up to 4.0.
- These units employ DC inverter compressors ONLY.
- Industry leading total piping length up to 510m and a maximum pipe run of 160m.

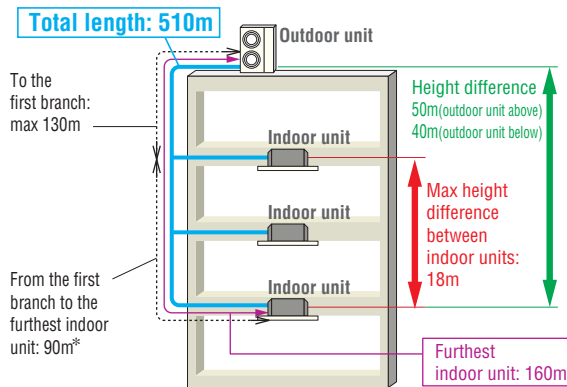

\*The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m.

Range of operation

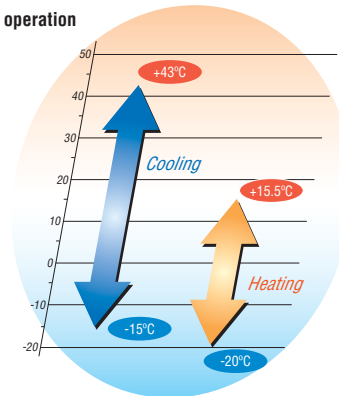

## Specifications

Item	Model	FDC224KXE6	FDC280KXE6	FDC335KXE6	
Nominal horse power		8HP	10HP	12HP	
Power source		3 Phase 380-415V, 50Hz			
Nominal capacity	Cooling	22.4	28.0	33.5	
	Heating	25.0	31.5	37.5	
Electrical characteristics	Starting current	5			
	Power consumption	Cooling	5.60	8.09	9.82
		Heating	6.03	8.21	10.12
	Running current	Cooling	9.25-8.47	13.22-12.10	15.87-14.53
Heating		9.85-9.02	13.41-12.28	16.36-14.98	
Exterior dimensions	HxWxD	mm 1675x1080x480			
Net weight	kg	221		224	
Refrigerant charge	R410A	11.5			
Sound pressure level	Cooling/Heating	58/58	59/60	61/61	
Refrigerant piping size	Liquid line	ø9.52(3/8")			
	Gas line	ø19.05(3/4")	ø22.22(7/8")	ø25.4(1") [ø22.22(7/8")]	
Capacity connection	%	50~150			
Number of connectable indoor units		22	24	24	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.  
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.  
 3. [ ] : Pipe sizes applicable to European installations are shown in parentheses.

# Refrigerant piping

Outdoor unit (HP)		8	10	12
Gas pipe	Furthest indoor unit =<90m	ø19.05	ø22.22	ø28.58
Liquid pipe		ø9.52		ø12.7
Gas pipe	Furthest indoor unit =<90m	ø22.22	ø28.58	
Liquid pipe		ø12.7		

Branch pipes



DIS-22-1G  
DIS-180-1G



DIS-371-1G



Header pipe



HEAD4-22-1G  
HEAD6-180-1G  
HEAD8-371-2

# Dimensions


All measurements in mm.



	I	II	III
L1	Open	Open	1500(500)*1
L2	300	5	Open
L3	300	300	300
L4	250(5)*2	250(5)*2	250(5)*2

Notes:

- \*1 Figure in ( ) shows the value applicable when the flex flow adaptor is installed.
- \*2 Under the setting condition as specified in ( ), it is necessary to secure 250 mm for the dimension L4 when replacing the compressor. Establish this for example by moving the unit during the work.

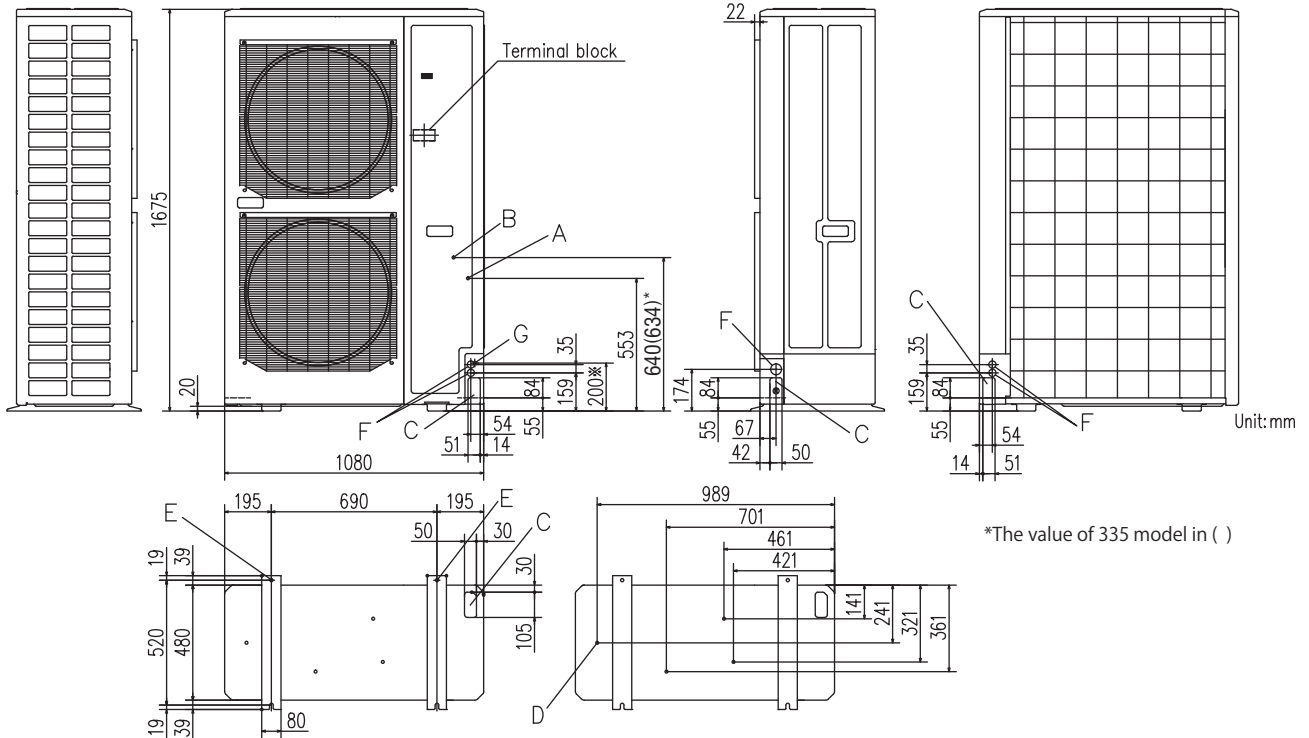

\*The value of 335 model in ( )

Mark	Item	224	280	335
A	Service valve connection of the attached connecting pipe (gas side)	ø19.05 (3/4") (Flare)	ø19.05 (3/4") (Flare)	ø19.05 (3/4") (Flare)
B	Service valve connection (liquid side)	ø9.52 (3/8") (Flare)	ø9.52 (3/8") (Flare)	ø12.7 (1/2") (Flare)
C	Pipe/cable draw-out hole	4places	4places	4places
D	Drain discharge hole	ø20 × 4places	ø20 × 4places	ø20 × 4places
E	Anchor bolt hole	M10 × 4places	M10 × 4places	M10 × 4places
F	Cable draw-out hole	ø30 × 2places (front) ø45 (side) ø30 × 2places (back)	ø30 × 2places (front) ø45 (side) ø30 × 2places (back)	ø30 × 2places (front) ø45 (side) ø30 × 2places (back)
G	Connecting position of the local pipe. (gas side)	ø19.05 (3/4")(Brazing)	ø22.22 (7/8")(Brazing)	ø25.4 (1")(Brazing)

Notes:

- It must not be surrounded by walls on the four sides.
- The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- Where the unit is subject to strong winds, the blower outlet should face perpendicularly to the dominant wind direction.
- Leave a 1m or more space above the unit.
- A wall in front of the blower outlet must not exceed the units height.
- The model name label is attached on the lower right corner of the front.
- Connect the Service valve with local pipe by using the pipe of the attachment.(Gas side only)
- Mark ※ shows the connecting position of the local pipe.(Gas side only)



# KXZ Lite Outdoor units


## Heat pump systems 8, 10HP (22.4kW · 28.0kW)

Model No.	Nominal Cooling Capacity
FDC224KXZPE1	22.4kW
FDC280KXZPE1	28.0kW


**NEW**



- These heat pump 2-pipe systems offer high performance VRF for applications that require either cooling only or heating only, ideal for open plan areas.
- Connect up to 8 indoor units/up to 120% capacity.
- High efficiency with COP (in cooling) up to 4.0.
- These units employ DC inverter multiport compressors with concentrated winding motor.

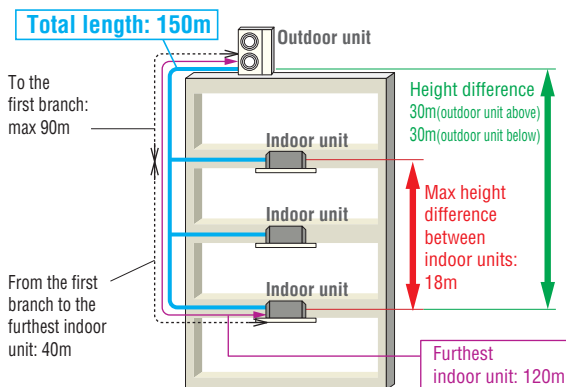

Range of operation

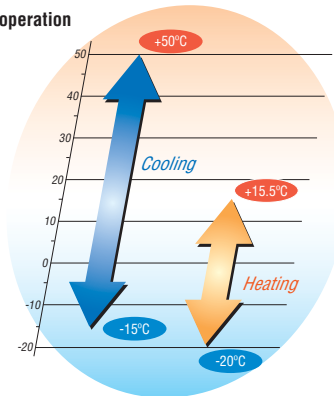

## Specifications

Item	Model	FDC224KXZPE1	FDC280KXZPE1	
Nominal horse power		8HP	10HP	
Power source		3 Phase 380-415V, 50Hz		
Nominal capacity	Cooling	22.4	28.0	
	Heating	22.4	28.0	
Electrical characteristics	Starting current	5		
	Power consumption	Cooling	5.6	7.87
		Heating	4.8	6.47
	Running current	Cooling	9.2-8.5	12.9-11.8
Heating		7.9-7.3	10.6-9.7	
Exterior dimensions	HxWxD	1505x970x370		
Net weight	kg	165		
Refrigerant charge	R410A	8.9		
Sound pressure level	Cooling/Heating	59/60		
Refrigerant piping size	Liquid line	ø9.52(3/8")		
	Gas line	ø19.05(3/4")		
Capacity connection	%	50~120		
Number of connectable indoor units		8	8	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.  
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

# Refrigerant piping

Outdoor unit (HP)		8	10
Gas pipe	Furthest indoor unit =<90m	ø19.05	ø22.22
Liquid pipe		ø9.52	
Gas pipe	Furthest indoor unit =<90m	ø22.22	ø25.4/ø28.58
Liquid pipe		ø12.7	

Branch pipes



DIS-22-1G  
DIS-180-1G


Header pipe



HEAD4-22-1G  
HEAD6-180-1G

# Dimensions

All measurements in mm.

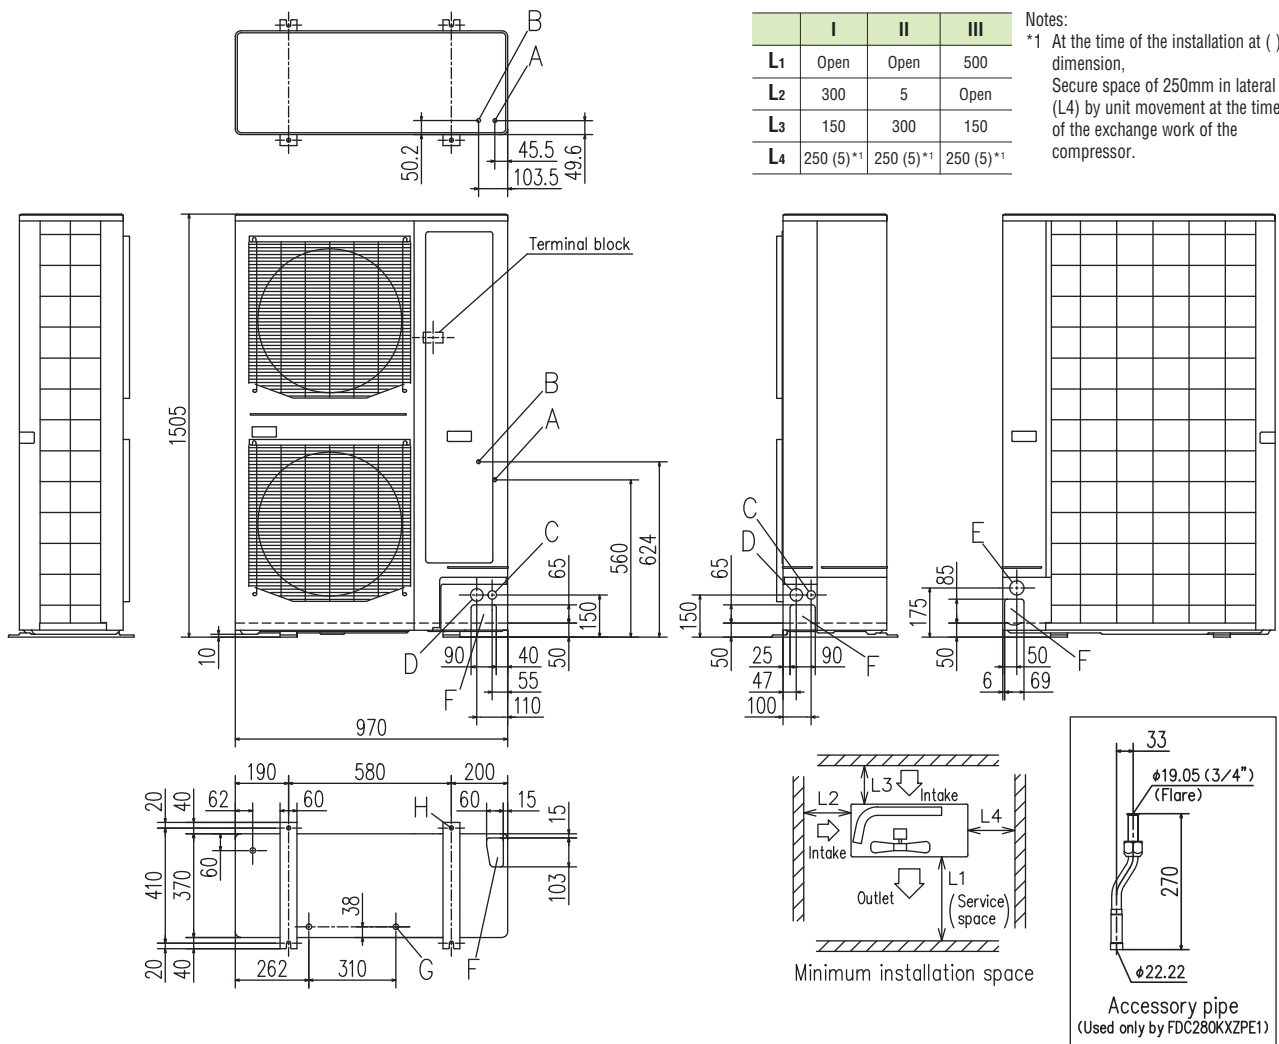

	I	II	III
L1	Open	Open	500
L2	300	5	Open
L3	150	300	150
L4	250 (5)*1	250 (5)*1	250 (5)*1

Notes:  
\*1 At the time of the installation at ( ) dimension, Secure space of 250mm in lateral (L4) by unit movement at the time of the exchange work of the compressor.

Mark	Item	
A	Service valve connection of the attached connecting pipe (gas side)	ø19.05 (3/4") (Flare)
B	Service valve connection (liquid side)	ø9.52 (3/8") (Flare)
C	Cable draw-out hole (front · side)	ø30 × 2places
D	Cable draw-out hole (front · side)	ø45 × 2places
E	Cable draw-out hole (back)	ø50
F	Pipe/cable draw-out hole	4places
G	Drain discharge hole	ø20 × 3places
H	Anchor bolt hole	M10 × 4places

- Notes:
- (1) It must not be surrounded by walls on the four sides.
  - (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
  - (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction.
  - (4) Leave 1m or more space above the unit.
  - (5) A wall in front of the blower outlet must not exceed the units height.
  - (6) The model name label is attached on the lower right corner of the front panel.
  - (7) Connect the Service valve with local pipe by using the pipe of the attachment. (Gas side only) (Accessory pipe is used only by FDC280KXZPE1)
  - (8) Regarding attaching the pipe of accessories, refer to an attached installation manual.





# KXZ Outdoor units

## Heat pump systems 10, 12HP (28.0kW, 33.5kW)


Model No.	Nominal Cooling Capacity
FDC280KXZE1	28.0kW
FDC335KXZE1	33.5kW

**NEW**




Uniform footprint of models (10,12HP) allows continuous side-by-side installation

- The KXZ heat pump 2-pipe systems offer high performance VRF for applications that require either cooling only or heating only, ideal for open plan areas.
- Connect up to 29 indoor units/up to 130% capacity.
- High efficiency with COP (in cooling) up to 3.9.
- KXZ employs DC inverter compressors ONLY.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.

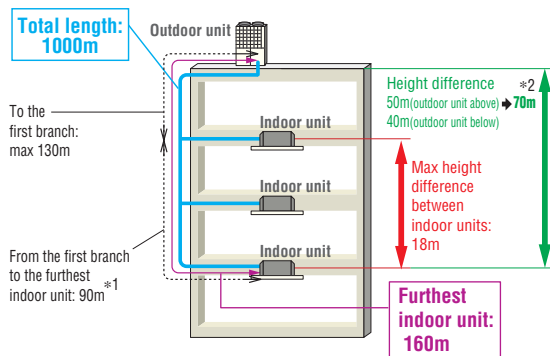

- \*1 The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m. (MAX85m)
- \*2 In case of height difference up to 70m, please contact your dealer. Height difference up to 90m is possible with High Head series. Please refer to page 110.

Range of operation

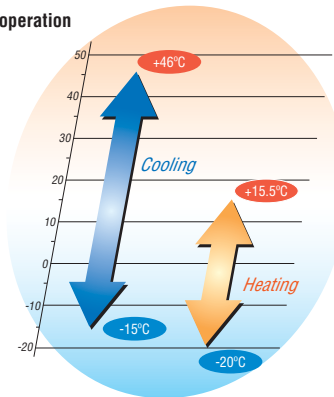


## Specifications

Item	Model	FDC280KXZE1	FDC335KXZE1	
Nominal horse power		10HP	12HP	
Power source		3 Phase 380-415V, 50Hz		
Nominal capacity	Cooling	28.0	33.5	
	Heating	31.5	37.5	
Electrical characteristics	Starting current	5		
	Power consumption	Cooling	7.24	8.96
		Heating	7.28	9.04
	Running current	Cooling	11.9-10.9	14.6-13.4
Heating		12.0-11.0	14.8-13.5	
Exterior dimensions	HxWxD	1690x1350x720		
Net weight	kg	272		
Refrigerant charge	R410A	11.0		
Sound pressure level	Cooling/Heating	55/57	61/58	
Refrigerant piping size	Liquid line	ø9.52(3/8")	ø12.7(1/2")	
	Gas line	ø22.22(7/8")	ø25.4(1") [ø22.22(7/8")]	
Capacity connection	%	50~130		
Number of connectable indoor units		24	29	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.  
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.  
 3. [ ] : Pipe sizes applicable to European installations are shown in parentheses.

# Dimensions

All measurements in mm.

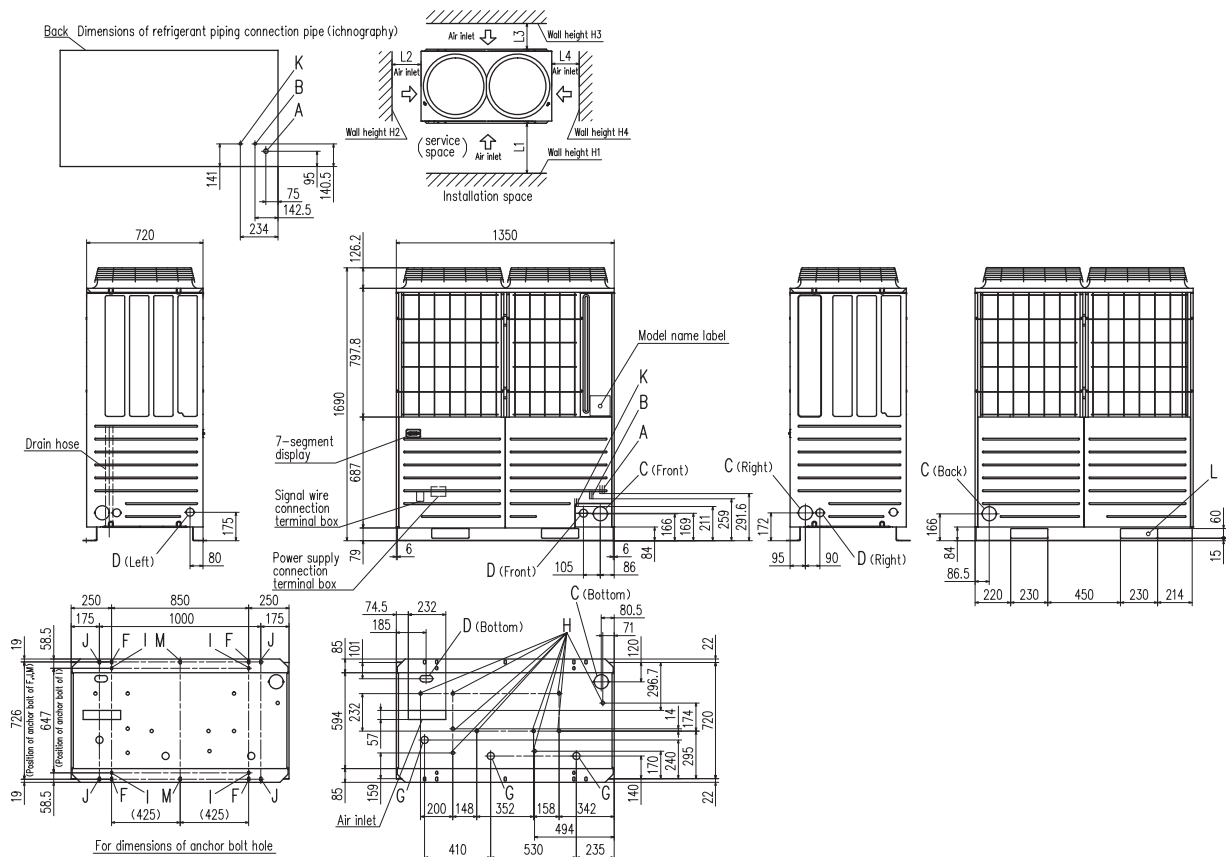


Mark	Content	280	335
A	Refrigerant gas piping connection pipe	ø22.22(Brazing)	ø25.4(Brazing)
B	Refrigerant liquid piping connection pipe	ø9.52(Flare)	ø12.7(Flare)
C	Refrigerant piping exit hole	ø88(or ø100)	
D	Power supply entry hole	ø50 (right · left · front), long hole 40 x 80 (bottom)	
F	Anchor bolt hole	M10 x 4 places	
G	Drain waste water hose hole	ø45 x 3 places	
H	Drain hole	ø20 x 10 places	
K	Refrigerant oil equalization piping connection pipe	ø9.52(Flare)	
L	Carrying in or hole for hanging	230 x 60	

Installation example		
Dimensions	1	2
L <sub>1</sub>	500	Open
L <sub>2</sub>	10(30)	10(30)
L <sub>3</sub>	100	100
L <sub>4</sub>	10(30)	Open
H <sub>1</sub>	1500	Open
H <sub>2</sub>	No limit	No limit
H <sub>3</sub>	1000	No limit
H <sub>4</sub>	No limit	Open

In case the ambient temperature becomes 43°C or higher during cooling operation

### When more than one unit is installed

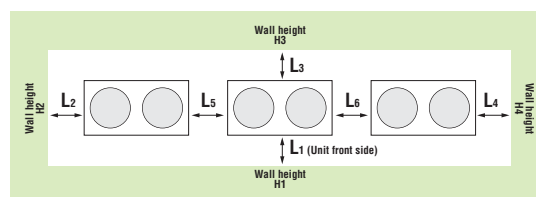

Installation example		
Dimensions	1	2
L <sub>1</sub>	500	Open
L <sub>2</sub>	10(30)	200
L <sub>3</sub>	100	300
L <sub>4</sub>	10(30)	Open
L <sub>5</sub>	10(30)	400
L <sub>6</sub>	10(30)	400
H <sub>1</sub>	1500	Open
H <sub>2</sub>	No limit	No limit
H <sub>3</sub>	1000	No limit
H <sub>4</sub>	No limit	Open

In case the ambient temperature becomes 43°C or higher during cooling operation



# KXZ Outdoor units


## Heat pump systems 14, 16, 17, 18, 20HP (40.0kW~56.0kW)

Model No.	Nominal Cooling Capacity
FDC400KXZE1	40.0kW
FDC450KXZE1	45.0kW
FDC475KXZE1	47.5kW
FDC500KXZE1	50.0kW
FDC560KXZE1	56.0kW




Uniform footprint of all models (from 14HP-20HP) allows continuous side-by-side installation

- The KXZ heat pump 2-pipe systems offer high performance VRF for applications that require either cooling only or heating only, ideal for open plan areas.
- Connect up to 48 indoor units/up to 130% capacity.
- High efficiency with COP (in cooling) up to 3.6.
- KXZ employs DC inverter compressors ONLY.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.

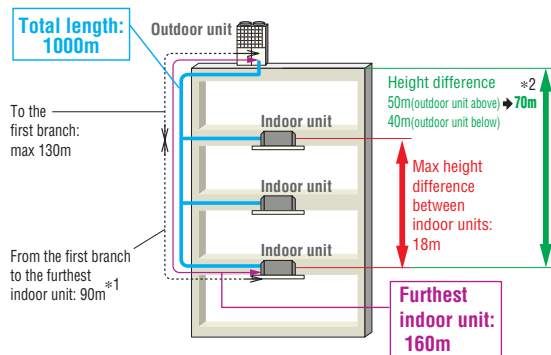

\*1 The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m. (MAX85m)  
 \*2 In case of height difference up to 70m, please contact your dealer. Height difference up to 90m is possible with High Head series. Please refer to page 110.

Range of operation

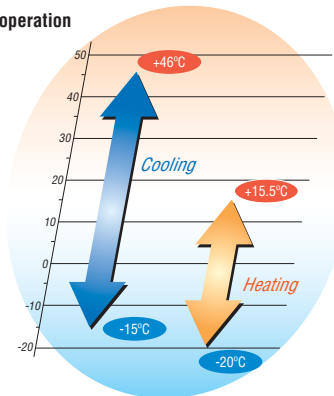


## Specifications

Item	Model	FDC400KXZE1	FDC450KXZE1	FDC475KXZE1	FDC500KXZE1	FDC560KXZE1	
Nominal horse power		14HP	16HP	17HP	18HP	20HP	
Power source		3 Phase 380-415V, 50Hz					
Nominal capacity	Cooling	40.0	45.0	47.5	50.0	56.0	
	Heating	45.0	50.0	53.0	56.0	63.0	
Electrical characteristics	Starting current	5			8		
	Power consumption	Cooling	10.96	13.98	13.98	13.97	16.62
		Heating	10.69	12.50	13.00	13.49	15.95
	Running current	Cooling	17.5-16.2	22.4-20.5	22.6-20.7	22.6-20.7	26.9-24.6
Heating		17.5-16.2	20.4-18.7	21.0-19.2	21.8-20.0	25.8-23.6	
Exterior dimensions	HxWxD	mm 2048x1350x720					
Net weight	kg	317		370			
Refrigerant charge	R410A	kg 11.5					
Sound pressure level	Cooling/Heating	dB(A) 60/62, 61/62, 61/61, 61/62, 64/66					
Refrigerant piping size	Liquid line	mm(in) ø12.7(1/2")					
	Gas line	ø25.4(1") [ø28.58(1 1/8")]		ø28.58(1 1/8")			
Capacity connection	%	50~130					
Number of connectable indoor units		34	39	41	43	48	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.  
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.  
 3. [ ] : Pipe sizes applicable to European installations are shown in parentheses.

# Dimensions

All measurements in mm.

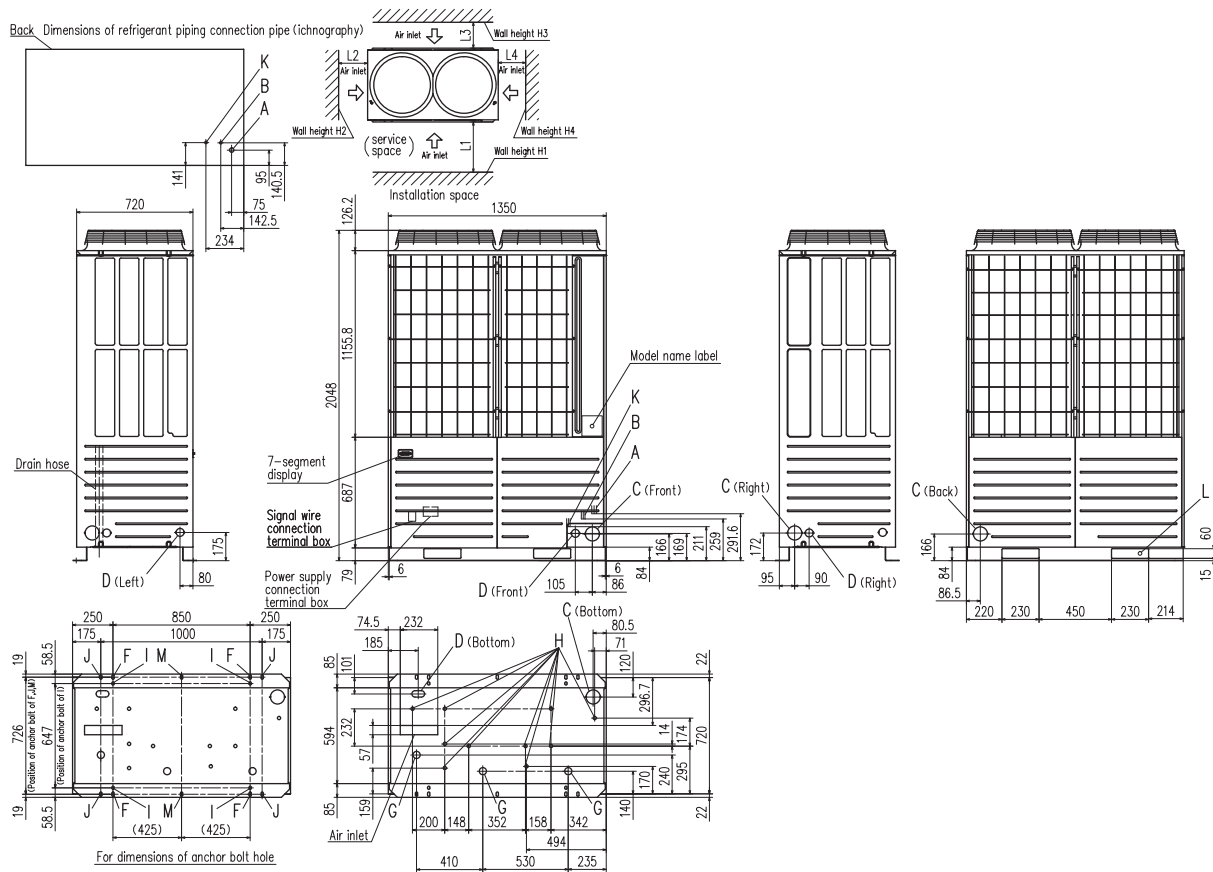

Mark	Content	400	450, 475, 500, 560
A	Refrigerant gas piping connection pipe	ø25.4(Brazing)	ø28.58(Brazing)
B	Refrigerant liquid piping connection pipe	ø12.7(Flare)	
C	Refrigerant piping exit hole	ø88(or ø100)	
D	Power supply entry hole	ø50 (right · left · front), long hole 40 x 80 (bottom)	
F	Anchor bolt hole	M10 x 4 places	
G	Drain waste water hose hole	ø45 x 3 places	
H	Drain hole	ø20 x 10 places	
K	Refrigerant oil equalization piping connection pipe	ø9.52(Flare)	
L	Carrying in or hole for hanging	230 x 60	

Installation example		
Dimensions	1	2
L1	500	Open
L2	10(30)	10(30)
L3	100	100
L4	10(30)	Open
H1	1500	Open
H2	No limit	No limit
H3	1000	No limit
H4	No limit	Open

In case the ambient temperature becomes 43°C or higher during cooling operation





# KXZ Outdoor units

## Heat pump combination systems

### 22, 24HP (61.5kW, 67.0kW)




Model No.	Nominal Cooling Capacity
FDC615KXZE1 (FDC280+FDC335)	61.5kW
FDC670KXZE1 (FDC335+FDC335)	67.0kW



- The KXZ heat pump 2-pipe systems offer high performance VRF for applications that require either cooling only or heating only, ideal for open plan areas.
- Connect up to 58 indoor units/up to 130% capacity.
- High efficiency with COP (in cooling) up to 3.8.
- KXZ employs DC inverter compressors ONLY.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.




Uniform footprint of all models (from 22HP, 24HP) allows continuous side-by-side installation

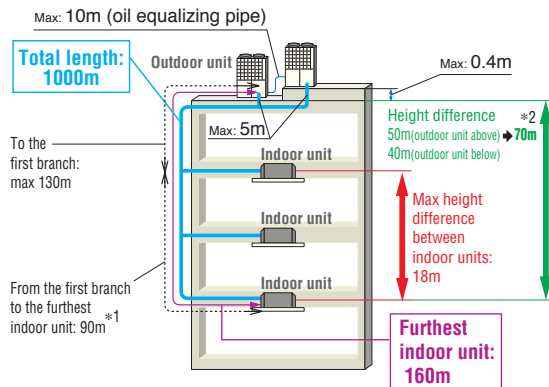

- \*1 The difference between the longest and the shortest piping from the first branch must be within 40m. (MAX85m)
- \*2 In case of height difference up to 70m, please contact your dealer. Height difference up to 90m is possible with High Head series. Please refer to page 110.

Range of operation

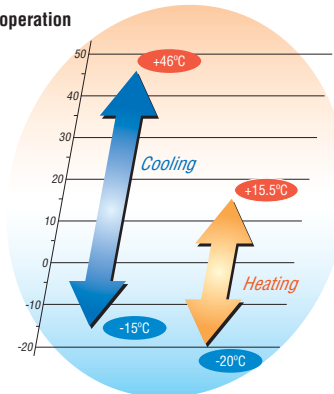


## Specifications

Item	Model	FDC615KXZE1	FDC670KXZE1	
Combination (FDC)		280KXZE1	335KXZE1	
		335KXZE1	335KXZE1	
Nominal horse power		22HP	24HP	
Power source		3 Phase 380-415V, 50Hz		
Nominal capacity	Cooling	61.5	67.0	
	Heating	69.0	75.0	
Electrical characteristics	Starting current	A 10		
	Power consumption	Cooling	16.20	17.92
		Heating	16.32	18.08
	Running current	Cooling	26.5-24.3	29.2-26.8
Heating		26.8-24.5	29.6-27.0	
Exterior dimensions	HxWxD	mm 1690x2700x720		
Net weight		kg 544		
Refrigerant charge	R410A	kg 11.0x2		
Refrigerant piping size	Liquid line	mm(in) ø12.7(1/2")		
	Gas line	mm(in) ø28.58(1 1/8")		
Capacity connection	%	50~130		
Number of connectable indoor units		53	58	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.  
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

# Dimensions

All measurements in mm.

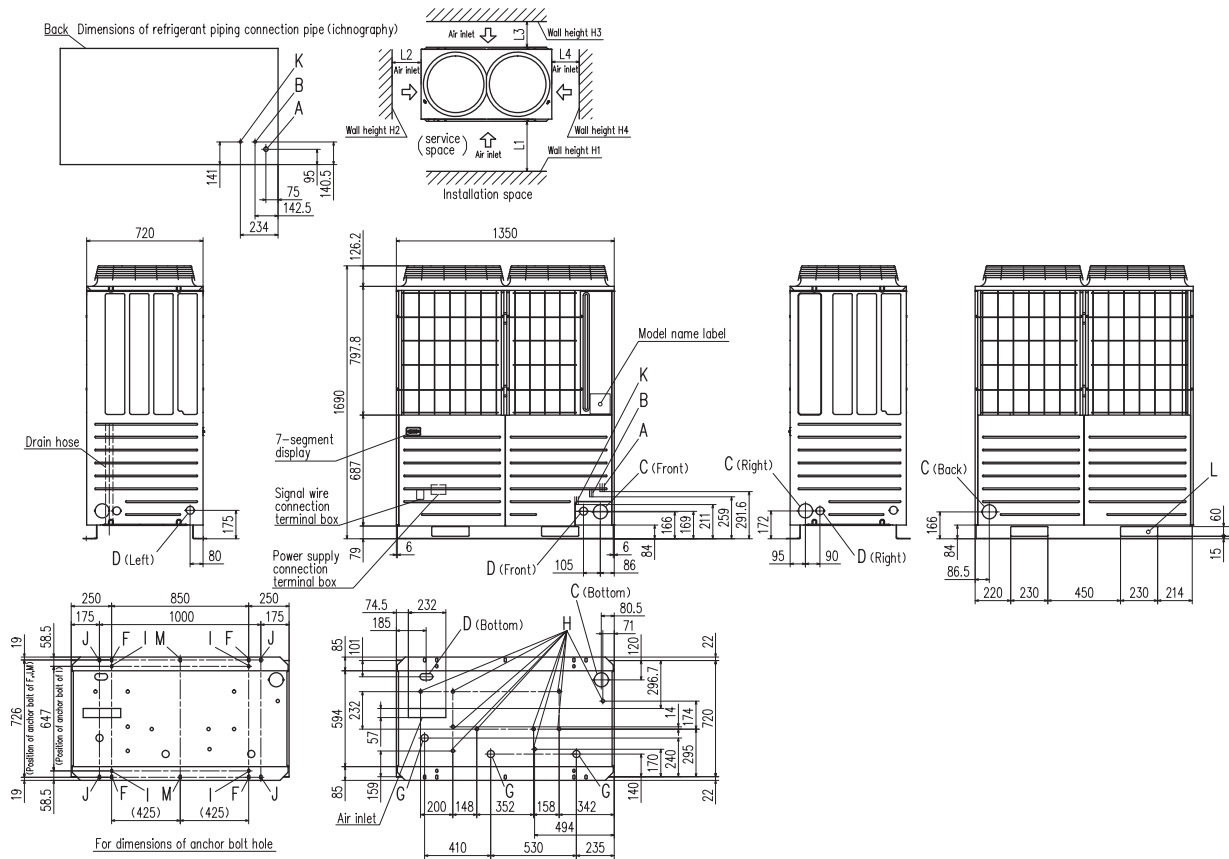

Mark	Content	280	335
A	Refrigerant gas piping connection pipe	ø22.22(Brazing)	ø25.4(Brazing)
B	Refrigerant liquid piping connection pipe	ø9.52(Flare)	ø12.7(Flare)
C	Refrigerant piping exit hole	ø88(or ø100)	
D	Power supply entry hole	ø50 (right · left · front), long hole 40 x 80 (bottom)	
F	Anchor bolt hole	M10 x 4 places	
G	Drain waste water hose hole	ø45 x 3 places	
H	Drain hole	ø20 x 10 places	
K	Refrigerant oil equalization piping connection pipe	ø9.52(Flare)	
L	Carrying in or hole for hanging	230 x 60	

Installation example		
Dimensions	1	2
L <sub>1</sub>	500	Open
L <sub>2</sub>	10(30)	10(30)
L <sub>3</sub>	100	100
L <sub>4</sub>	10(30)	Open
H <sub>1</sub>	1500	Open
H <sub>2</sub>	No limit	No limit
H <sub>3</sub>	1000	No limit
H <sub>4</sub>	No limit	Open

In case the ambient temperature becomes 43°C or higher during cooling operation



# KXZ Outdoor units

## Heat pump combination systems


### 26, 28, 30, 32, 34, 36, 38, 40HP (73.5kW~112.0kW)

Model No.	Nominal Cooling Capacity
FDC735KXZE1 (FDC335+FDC400)	73.5kW
FDC800KXZE1 (FDC400+FDC400)	80.0kW
FDC850KXZE1 (FDC400+FDC450)	85.0kW
FDC900KXZE1 (FDC450+FDC450)	90.0kW
FDC950KXZE1 (FDC475+FDC475)	95.0kW
FDC1000KXZE1 (FDC500+FDC500)	100.0kW
FDC1060KXZE1 (FDC500+FDC560)	106.0kW
FDC1120KXZE1 (FDC560+FDC560)	112.0kW

**NEW**




- The KXZ heat pump 2-pipe systems offer high performance VRF for applications that require either cooling only or heating only, ideal for open plan areas.
- Connect up to 80 indoor units/up to 130% capacity.
- High efficiency with COP (in cooling) up to 3.7.
- KXZ employs DC inverter compressors ONLY.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.

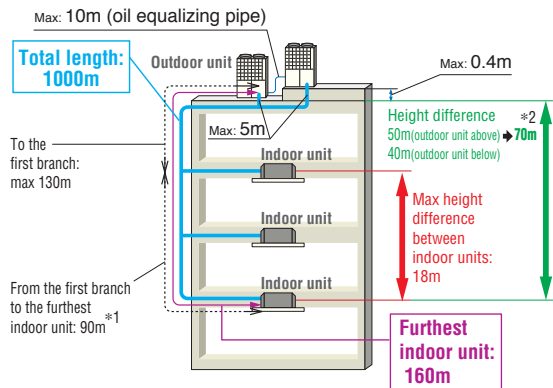

\*1 The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m. (MAX85m)  
 \*2 In case of height difference up to 70m, please contact your dealer. Height difference up to 90m is possible with High Head series. Please refer to page 110.

Range of operation

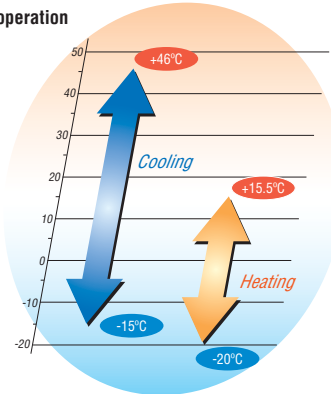

## Specifications


\*Exterior dimension : Please refer to page 27.

Item	Model	FDC735KXZE1	FDC800KXZE1	FDC850KXZE1	FDC900KXZE1	FDC950KXZE1	FDC1000KXZE1	FDC1060KXZE1	FDC1120KXZE1		
Combination (FDC)		335KXZE1*	400KXZE1	400KXZE1	450KXZE1	475KXZE1	500KXZE1	500KXZE1	560KXZE1		
		400KXZE1	400KXZE1	450KXZE1	450KXZE1	475KXZE1	500KXZE1	560KXZE1	560KXZE1		
Nominal horse power		26HP	28HP	30HP	32HP	34HP	36HP	38HP	40HP		
Power source		3 Phase 380-415V, 50Hz									
Nominal capacity	Cooling	kW	73.5	80.0	85.0	90.0	95.0	100.0	106.0	112.0	
	Heating	kW	82.5	90.0	95.0	100.0	106.0	112.0	119.0	126.0	
Electrical characteristics	Starting current	A	10				16				
	Power consumption	Cooling	kW	19.92	21.92	24.94	27.96	27.96	27.94	30.59	33.24
		Heating	kW	19.73	21.38	23.19	25.00	26.00	26.98	29.44	31.90
	Running current	Cooling	A	32.1-29.6	35.0-32.4	39.9-36.7	44.8-41.0	45.2-41.4	45.2-41.4	49.5-45.3	53.8-49.2
Heating		A	32.3-29.7	35.0-32.4	37.9-34.9	40.8-37.4	42.0-38.4	43.6-40.0	47.6-43.6	51.6-47.2	
Exterior dimensions	HxWxD	mm	2048x2700x720						740		
Net weight		kg	589	634			740				
Refrigerant charge	R410A	kg	11.0+11.5	11.5x2							
Refrigerant piping size	Liquid line	mm(in)	ø15.88(5/8")						ø19.05(3/4")		
	Gas line	mm(in)	ø31.75(1 1/4") [ø34.92(1 3/8")]						ø38.1(1 1/2") [ø34.92(1 3/8")]		
Capacity connection	%	50~130									
Number of connectable indoor units		63	69	73	78	80					

1. The data are measured under the following conditions (ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.  
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.  
 3. [ ] : Pipe sizes applicable to European installations are shown in parentheses.

# Dimensions

All measurements in mm.

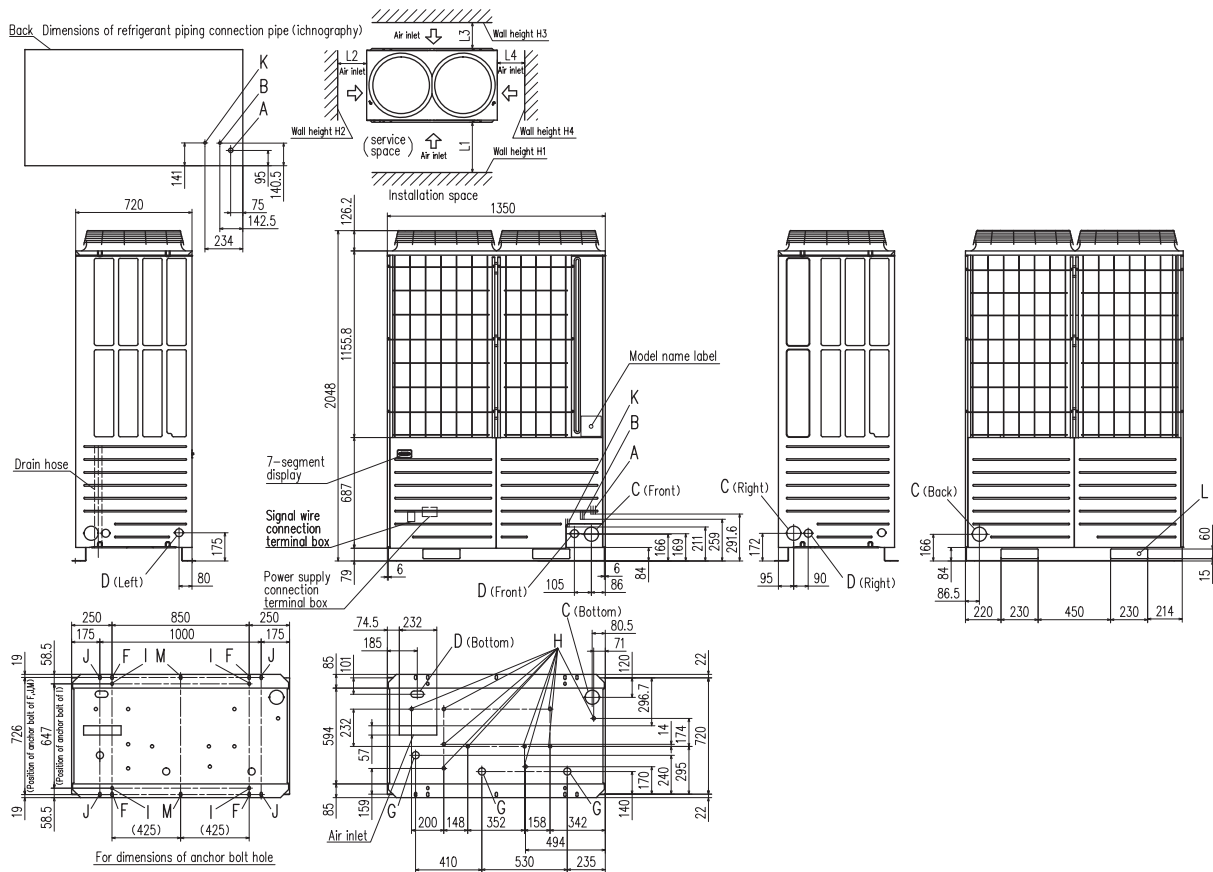

Mark	Content	400	450, 475, 500, 560
A	Refrigerant gas piping connection pipe	ø25.4(Brazing)	ø28.58(Brazing)
B	Refrigerant liquid piping connection pipe	ø12.7(Flare)	
C	Refrigerant piping exit hole	ø88(or ø100)	
D	Power supply entry hole	ø50 (right · left · front), long hole 40 x 80 (bottom)	
F	Anchor bolt hole	M10 x 4 places	
G	Drain waste water hose hole	ø45 x 3 places	
H	Drain hole	ø20 x 10 places	
K	Refrigerant oil equalization piping connection pipe	ø9.52(Flare)	
L	Carrying in or hole for hanging	230 x 60	

Installation example		
Dimensions	1	2
L <sub>1</sub>	500	Open
L <sub>2</sub>	10(30)	10(30)
L <sub>3</sub>	100	100
L <sub>4</sub>	10(30)	Open
H <sub>1</sub>	1500	Open
H <sub>2</sub>	No limit	No limit
H <sub>3</sub>	1000	No limit
H <sub>4</sub>	No limit	Open

In case the ambient temperature becomes 43°C or higher during cooling operation





# KXZ Outdoor units


## Heat pump combination systems

### 42, 44, 46, 48, 50, 52, 54, 56, 58, 60HP (120.0kW~168.0kW)

Model No.	Nominal Cooling Capacity
FDC1200KXZE1 (FDC400+FDC400+FDC400)	120.0kW
FDC1250KXZE1 (FDC400+FDC400+FDC450)	125.0kW
FDC1300KXZE1 (FDC400+FDC450+FDC450)	130.0kW
FDC1350KXZE1 (FDC450+FDC450+FDC450)	135.0kW
FDC1425KXZE1 (FDC475+FDC475+FDC475)	142.5kW
FDC1450KXZE1 (FDC475+FDC475+FDC500)	145.0kW
FDC1500KXZE1 (FDC500+FDC500+FDC500)	150.0kW
FDC1560KXZE1 (FDC500+FDC500+FDC560)	156.0kW
FDC1620KXZE1 (FDC500+FDC560+FDC560)	162.0kW
FDC1680KXZE1 (FDC560+FDC560+FDC560)	168.0kW




- The KXZ heat pump 2-pipe systems offer high performance VRF for applications that require either cooling only or heating only, ideal for open plan areas.
- Connect up to 80 indoor units/up to 130% capacity.
- High efficiency with COP (in cooling) up to 3.6.
- KXZ employs DC inverter compressors ONLY.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.

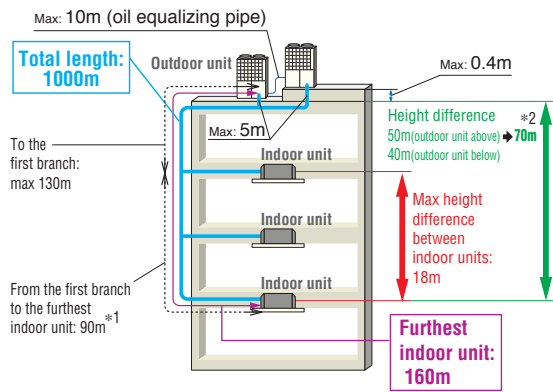

\*1 The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m. (MAX85m)  
 \*2 In case of height difference up to 70m, please contact your dealer. Height difference up to 90m is possible with High Head series. Please refer to page 110.

Range of operation

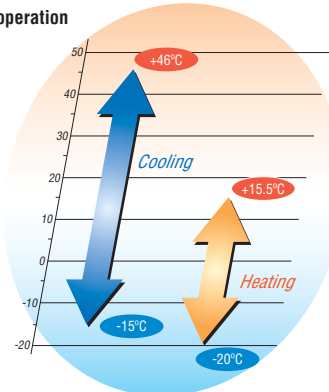


## Specifications

Item	Model	Model											
		FDC1200KXZE1	FDC1250KXZE1	FDC1300KXZE1	FDC1350KXZE1	FDC1425KXZE1	FDC1450KXZE1	FDC1500KXZE1	FDC1560KXZE1	FDC1620KXZE1	FDC1680KXZE1		
Combination (FDC)		400KXZE1	400KXZE1	400KXZE1	450KXZE1	475KXZE1	475KXZE1	500KXZE1	500KXZE1	500KXZE1	560KXZE1	560KXZE1	
		400KXZE1	400KXZE1	450KXZE1	450KXZE1	475KXZE1	475KXZE1	500KXZE1	500KXZE1	560KXZE1	560KXZE1	560KXZE1	
		400KXZE1	450KXZE1	450KXZE1	450KXZE1	475KXZE1	500KXZE1	500KXZE1	560KXZE1	560KXZE1	560KXZE1	560KXZE1	
Nominal horse power		42HP	44HP	46HP	48HP	50HP	52HP	54HP	56HP	58HP	60HP		
Power source		3 Phase 380-415V, 50Hz											
Nominal capacity	Cooling	kW	120.0	125.0	130.0	135.0	142.5	145.0	150.0	156.0	162.0	168.0	
	Heating	kW	135.0	140.0	145.0	150.0	159.0	162.0	168.0	175.0	182.0	189.0	
Electrical characteristics	Starting current	A	15					24					
	Power consumption	Cooling	kW	32.88	35.90	38.92	41.90	41.94	41.93	41.91	44.56	47.21	49.86
		Heating	kW	32.07	33.88	35.69	37.50	39.00	39.49	40.47	42.93	45.39	47.85
	Running current	Cooling	A	52.5-48.6	57.4-52.9	62.3-57.2	67.2-61.5	67.8-62.1	67.8-62.1	67.8-62.1	72.1-66.0	76.4-69.9	80.7-73.8
Heating		A	52.5-48.6	55.4-51.1	58.3-53.6	61.2-56.1	63.0-57.6	63.8-58.4	65.4-60.0	69.4-63.6	73.4-67.2	77.4-70.8	
Exterior dimensions	HxWxD	mm	2048x4050x720										
Net weight		kg	951					1110					
Refrigerant charge	R410A	kg	11.5x3										
Refrigerant piping size	Liquid line	mm(in)	ø19.05(3/4")										
	Gas line	mm(in)	ø38.1(1 1/2") [ø34.92(1 3/8")]										
Capacity connection		%	50-130										
Number of connectable indoor units			80										

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.  
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.  
 3. [ ] : Pipe sizes applicable to European installations are shown in parentheses.

# Dimensions

All measurements in mm.

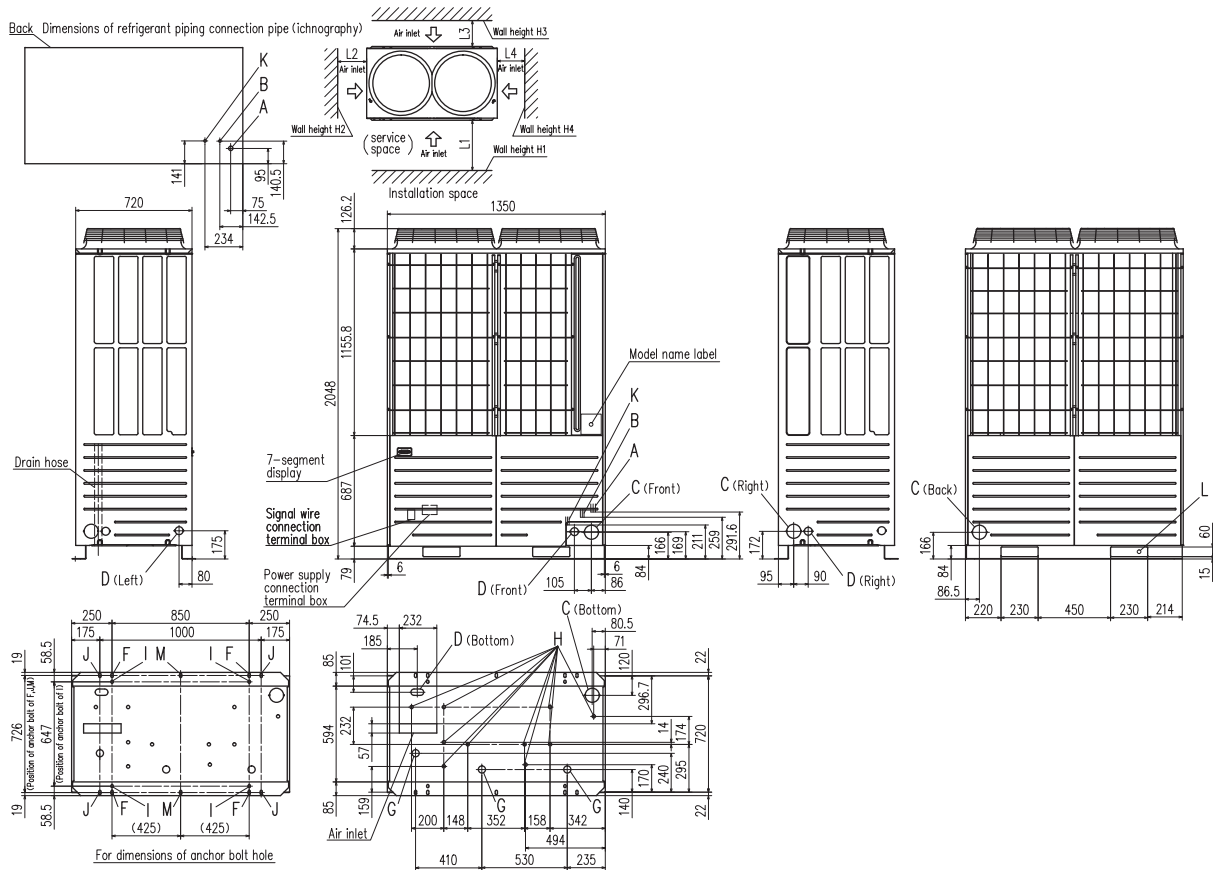

Mark	Content	400	450, 475, 500, 560
A	Refrigerant gas piping connection pipe	ø25.4(Brazing)	ø28.58(Brazing)
B	Refrigerant liquid piping connection pipe	ø12.7(Flare)	
C	Refrigerant piping exit hole	ø88(or ø100)	
D	Power supply entry hole	ø50 (right · left · front), long hole 40 x 80 (bottom)	
F	Anchor bolt hole	M10 x 4 places	
G	Drain waste water hose hole	ø45 x 3 places	
H	Drain hole	ø20 x 10 places	
K	Refrigerant oil equalization piping connection pipe	ø9.52(Flare)	
L	Carrying in or hole for hanging	230 x 60	

Installation example		
Dimensions	1	2
L <sub>1</sub>	500	Open
L <sub>2</sub>	10(30)	10(30)
L <sub>3</sub>	100	100
L <sub>4</sub>	10(30)	Open
H <sub>1</sub>	1500	Open
H <sub>2</sub>	No limit	No limit
H <sub>3</sub>	1000	No limit
H <sub>4</sub>	No limit	Open

In case the ambient temperature becomes 43°C or higher during cooling operation




# KXZ Outdoor units

## Hi-COP series 8~36HP (22.4kW~100.0kW)

Model No.	Nominal Cooling Capacity
FDC224KXZXE1	22.4kW
FDC280KXZXE1	28.0kW
FDC335KXZXE1	33.5kW

Model No.	Nominal Cooling Capacity
FDC450KXZXE1 (FDC224+FDC224)	45.0kW
FDC500KXZXE1 (FDC224+FDC280)	50.0kW
FDC560KXZXE1 (FDC280+FDC280)	56.0kW
FDC615KXZXE1 (FDC280+FDC335)	61.5kW
FDC670KXZXE1 (FDC335+FDC335)	67.0kW
FDC735KXZXE1 (FDC224+FDC224+FDC280)	73.5kW
FDC800KXZXE1 (FDC224+FDC280+FDC280)	80.0kW
FDC850KXZXE1 (FDC280+FDC280+FDC280)	85.0kW
FDC900KXZXE1 (FDC280+FDC280+FDC335)	90.0kW
FDC950KXZXE1 (FDC280+FDC335+FDC335)	95.0kW
FDC1000KXZXE1 (FDC335+FDC335+FDC335)	100.0kW



**NEW**

**Blue Fin**

**Blue Fin**



FDC224KXZXE1




FDC280KXZXE1  
FDC335KXZXE1


### Indoor unit connection capacity

This series can connect indoor unit capacity up to 160~200%.

kW	capacity connection
22.4~45.0	200%
50.0~100.0	160%

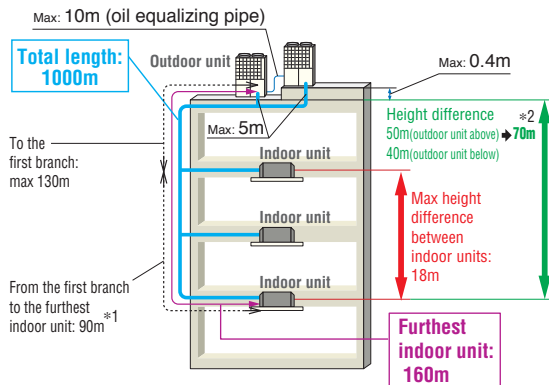

### Range of operation

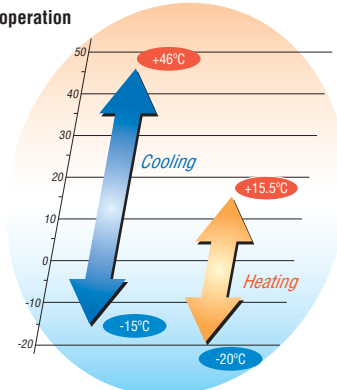

\*1 The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m. (MAX85m)

\*2 In case of height difference up to 70m, please contact your dealer. Height difference up to 90m is possible with High Head series. Please refer to page 110.

# Specifications

Item	Model	FDC224KXZE1	FDC280KXZE1	FDC335KXZE1	
Nominal horse power		8HP	10HP	12HP	
Power source		3Phase 380~415V, 50Hz			
Nominal capacity	Cooling	22.4	28.0	33.5	
	Heating	25.0	31.5	37.5	
Electrical characteristics	Starting current	5			
	Power consumption	Cooling	4.98	6.95	8.68
		Heating	5.56	6.83	8.39
	Running current	Cooling	8.7-8.0	11.7-10.7	14.7-13.4
Heating		9.6-8.8	11.7-10.7	14.3-13.1	
Exterior dimensions	H x W x D	1690x1350x720	2048x1350x720		
Net weight		280	325		
Refrigerant charge	R410A	11.0	11.5		
Refrigerant piping size	Liquid line	ø9.52(3/8")			
	Gas line	ø19.05(3/4")	ø22.22(7/8")	ø25.4(1") [ø22.22(7/8")]	
Capacity connection		200			
Number of connectable indoor units		29	37	44	

Item	Model	FDC450KXZE1	FDC500KXZE1	FDC560KXZE1	FDC615KXZE1	FDC670KXZE1	
Combination (FDC)		224KXZE1	224KXZE1	280KXZE1	280KXZE1	335KXZE1	
		224KXZE1	280KXZE1	280KXZE1	335KXZE1	335KXZE1	
Nominal horse power		16HP	18HP	20HP	22HP	24HP	
Power source		3Phase 380~415V, 50Hz					
Nominal capacity	Cooling	45.0	50.0	56.0	61.5	67.0	
	Heating	50.0	56.0	63.0	69.0	75.0	
Electrical characteristics	Starting current	10					
	Power consumption	Cooling	10.0	11.8	13.9	15.6	17.4
		Heating	11.1	12.3	13.7	15.2	16.8
	Running current	Cooling	17.5-16.0	20.0-18.5	23.5-21.5	26.4-24.1	29.3-26.8
Heating		19.2-17.6	21.2-19.4	23.3-24.4	26.0-23.8	28.6-26.2	
Exterior dimensions	H x W x D	1690x2700x720	2048x2700x720				
Net weight		560	605	650	650	650	
Refrigerant charge	R410A	11.0x2	11.0+11.5	11.5x2			
Refrigerant piping size	Liquid line	ø12.7(1/2")					
	Gas line	ø28.58(1 1/8")					
	Oil equalization	ø9.52(3/8")					
Capacity connection		200	160				
Number of connectable indoor units		60	53	59	65	71	

Item	Model	FDC735KXZE1	FDC800KXZE1	FDC850KXZE1	FDC900KXZE1	FDC950KXZE1	FDC1000KXZE1	
Combination (FDC)		224KXZE1	224KXZE1	280KXZE1	280KXZE1	280KXZE1	335KXZE1	
		224KXZE1	280KXZE1	280KXZE1	280KXZE1	335KXZE1	335KXZE1	
		280KXZE1	280KXZE1	280KXZE1	335KXZE1	335KXZE1	335KXZE1	
Nominal horse power		26HP	28HP	30HP	32HP	34HP	36HP	
Power source		3Phase 380~415V, 50Hz						
Nominal capacity	Cooling	73.5	80.0	85.0	90.0	95.0	100.0	
	Heating	82.5	90.0	95.0	100.0	106.0	112.0	
Electrical characteristics	Starting current	15						
	Power consumption	Cooling	17.1	19.3	21.1	22.7	24.3	25.9
		Heating	18.2	19.7	20.6	21.9	23.5	25.1
	Running current	Cooling	29.4-27.0	32.9-30.1	35.6-32.6	38.4-35.1	41.0-37.6	43.7-40.0
Heating		31.4-28.7	33.5-30.7	35.2-32.2	37.4-34.3	40.1-36.7	42.8-39.2	
Exterior dimensions	H x W x D	2048x4050x720						
Net weight		885	930	975	975			
Refrigerant charge	R410A	11.0x2+11.5	11.0+11.5x2	11.5x3				
Refrigerant piping size	Liquid line	ø15.88(5/8")						
	Gas line	ø31.75(1 1/4") [ø34.92(1 3/8")]						
	Oil equalization	ø9.52(3/8")						
Capacity connection		160						
Number of connectable indoor units		78	80	80	80	80	80	


1. The data are measured under the following conditions (ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.  
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.  
3. [ ] : Pipe sizes applicable to European installations are shown in parentheses.



# Dimensions

All measurements in mm.

FDC224KXZXE1

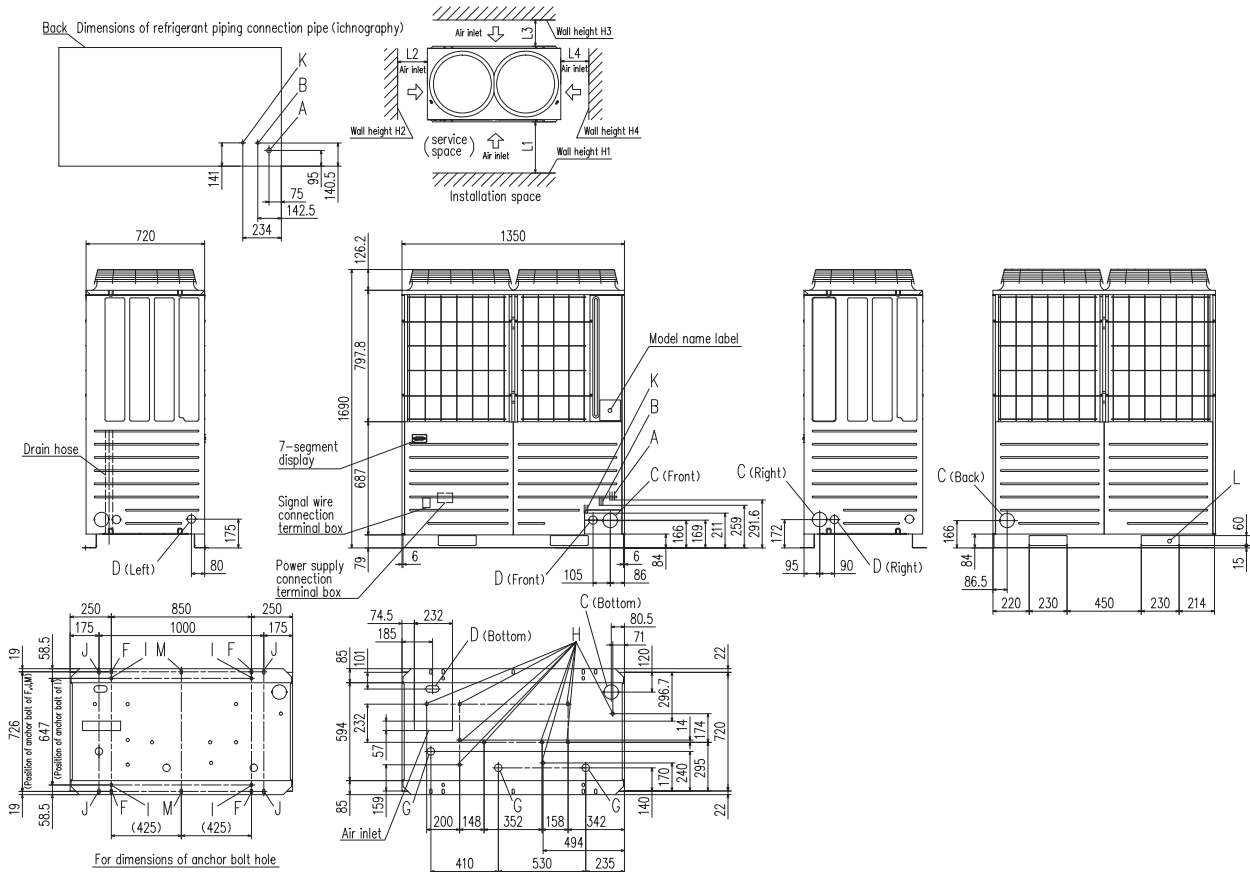


Mark	Content	224
A	Refrigerant gas piping connection pipe	ø19.05 (Brazing)
B	Refrigerant liquid piping connection pipe	ø9.52 (Flare)
C	Refrigerant piping exit hole	ø88 (or ø100)
D	Power supply entry hole	ø50 (Right · Left · Front), Long hole 40 x 80 (Bottom)
F	Anchor bolt hole	M10 x 4 places
G	Drain waste water hose hole	ø45 x 3 places
H	Drain hole	ø20 x 10 places
K	Refrigerant oil equalization piping connection pipe	ø9.52 (Flare)
L	Carrying in or hole for hanging	230 x 60

Installation example		
Dimensions	1	2
L <sub>1</sub>	500	Open
L <sub>2</sub>	10(30)	10(30)
L <sub>3</sub>	100	100
L <sub>4</sub>	10(30)	Open
H <sub>1</sub>	1500	Open
H <sub>2</sub>	No limit	No limit
H <sub>3</sub>	1000	No limit
H <sub>4</sub>	No limit	Open

In case the ambient temperature becomes 43°C or higher during cooling operation



## FDC280KXZE1, 335KXZE1

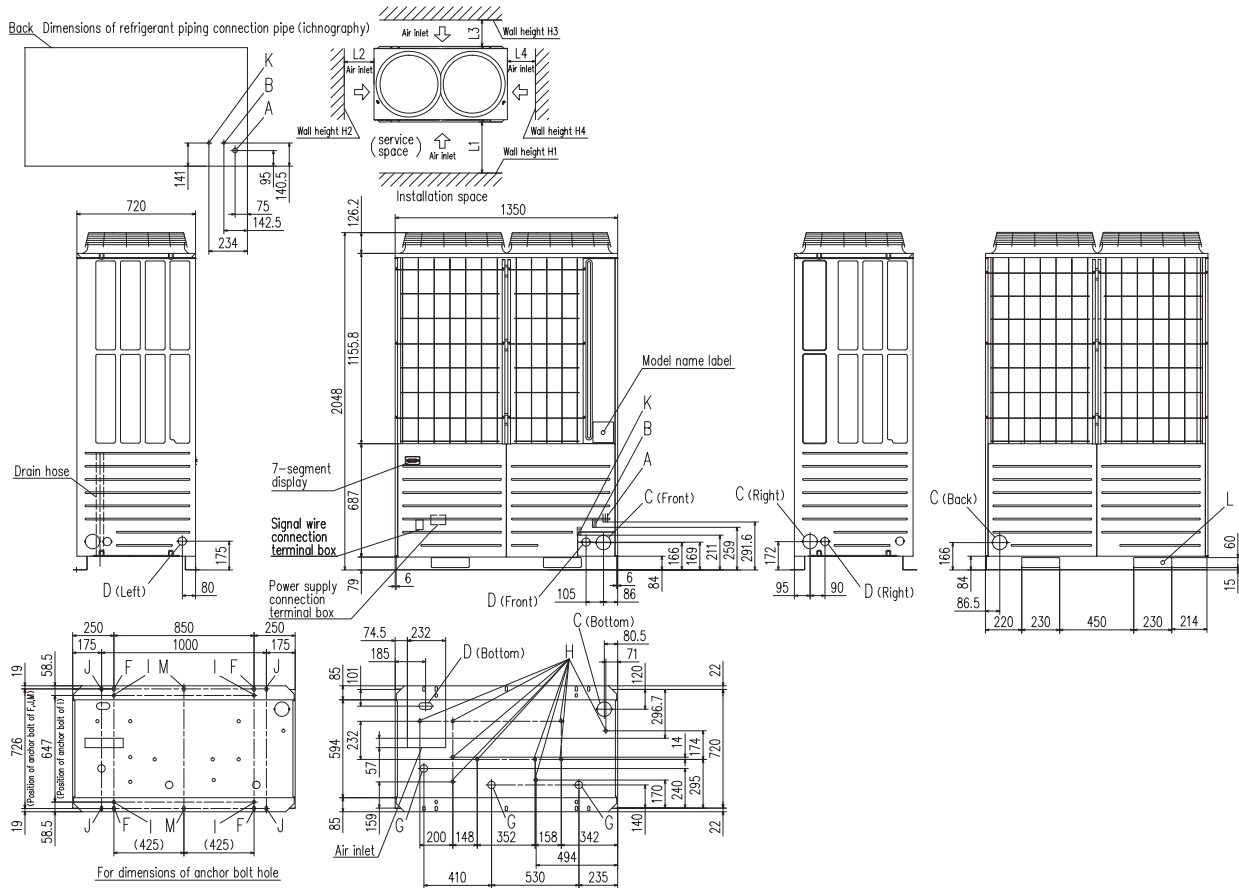

Mark	Content	280	335
A	Refrigerant gas piping connection pipe	ø22.22 (Brazing)	ø25.4 (Brazing)
B	Refrigerant liquid piping connection pipe	ø9.52 (Flare)	ø12.7 (Flare)
C	Refrigerant piping exit hole	ø88 (or ø100)	
D	Power supply entry hole	ø50 (Right · Left · Front), Long hole 40 x 80 (Bottom)	
F	Anchor bolt hole	M10 x 4 places	
G	Drain waste water hose hole	ø45 x 3 places	
H	Drain hole	ø20 x 10 places	
K	Refrigerant oil equalization piping connection pipe	ø9.52(Flare)	
L	Carrying in or hole for hanging	230 x 60	

Installation example		
Dimensions	1	2
L <sub>1</sub>	500	Open
L <sub>2</sub>	10(30)	10(30)
L <sub>3</sub>	100	100
L <sub>4</sub>	10(30)	Open
H <sub>1</sub>	1500	Open
H <sub>2</sub>	No limit	No limit
H <sub>3</sub>	1000	No limit
H <sub>4</sub>	No limit	Open

In case the ambient temperature becomes 43°C or higher during cooling operation



# KXZ refrigerant piping

## Installation of Interconnecting Pipework

Mitsubishi KXZ equipment is manufactured to the highest standards of quality and reliability. It is imperative the method of installation and the materials used are also to high standards, to ensure trouble free operation and long term reliability.

The interconnecting pipework must be installed by a competent and trained engineer. Refrigeration quality copper tube must be used, soft copper coils or half-hard straight lengths. The refrigeration quality tube must be soft drawn seamless high grade copper pipe. The copper tube must be selected taking into account the higher operating pressures of R410A refrigerant, and that high pressures will occur throughout the system because of the reverse cycle operation. All pipework material used should be EN12735 European standard.

The supplied branch pipe kits, must be used to make connections to indoor units, and the supplied manifold kits must be used to make connections between outdoor units (where applicable); it is not permitted to use standard fittings such as elbows, tees etc. The branch pipes shall be installed in accordance with the manufacturer's instructions, allowing unrestricted flow of refrigerant, and in accordance with European standard E378. All brazed joints shall be made with dry nitrogen purge to ensure the prevention of oxidation to the internal surface of the copper pipes.

The ingress of moisture, dirt and any other contaminants to the interior of the copper pipes, and air conditioning units, must be prevented during the installation procedure. After the installation of pipework, prior to the


connection of the outdoor units, and sealing of insulation joints, the pipework must be pressure tested for leakage, using dry nitrogen.

## Additional Refrigerant


Additional R410A refrigerant only shall be used, and must be charged by weight only, using electronic scales. The amount of additional refrigerant must be accurately calculated from the manufacturer's data, based on the length and diameter of each section of the liquid refrigerant pipework of the system.

The products contains fluorinated greenhouse gases covered by Kyoto protocol.

## Single outdoor unit piping examples:

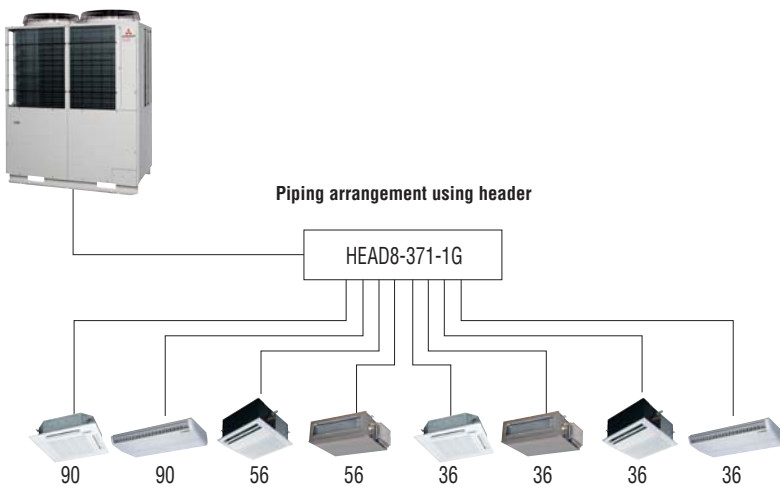

Liquid pipe  
Gas pipe

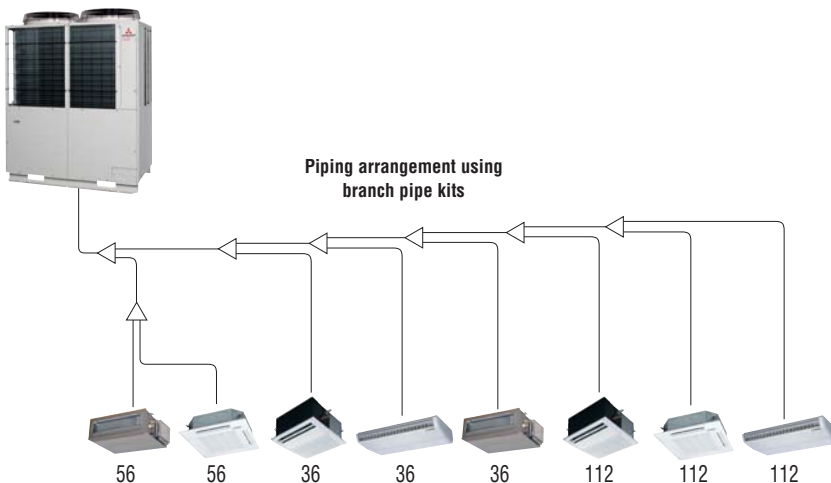

# KXZ refrigerant piping

**Main (Outdoor unit side branching pipe – Indoor unit side first branching pipe)**  
 If the longest distance (measured between the outdoor unit and the farthest indoor unit) is 90m or longer (actual length), please change the main pipe size according to the table below.

Outdoor unit	Main pipe size (normal)		Pipe size for an actual length of 90m or longer		mm	inch				
	Gas pipe	Liquid pipe	Gas pipe	Liquid pipe						
280	ø22.22 × t1.0	ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0	ø12.7 × t0.8	ø9.52	3/8"				
335	ø25.4 (ø22.22) × t1.0	ø12.7 × t0.8			ø31.8 × t1.1 (ø28.58 × t1.0)	ø15.88 × t1.0	ø12.7	1/2"		
400	ø25.4 (ø28.58) × t1.0		ø15.88	5/8"						
450	ø28.58 × t1.0		ø19.05 × t1.0	ø38.1 × t1.35 (ø34.92 × t1.2)			ø22.22 × t1.0	ø19.05	3/4"	
475								ø31.8 × t1.1 (ø34.92 × t1.2)	ø15.88 × t1.0	ø19.05 × t1.0
500		ø38.1 × t1.35 (ø34.92 × t1.2)			ø19.05 × t1.0	ø38.1 × t1.35 (ø34.92 × t1.2)				
560	ø31.8 × t1.1 (ø34.92 × t1.2)		ø15.88 × t1.0	ø19.05 × t1.0			ø15.88	5/8"		
615									ø28.58 × t1.0	ø12.7 × t0.8
670	ø25.4 (ø22.22) × t1.0		ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø12.7		
735									ø22.22 × t1.0	ø9.52 × t0.8
800	ø22.22 × t1.0		ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø19.05		
850									ø22.22 × t1.0	ø9.52 × t0.8
900	ø22.22 × t1.0		ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø25.4		
950									ø22.22 × t1.0	ø9.52 × t0.8
1000	ø22.22 × t1.0		ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø25.4		
1060		ø22.22 × t1.0			ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø25.4
1120	ø22.22 × t1.0		ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø25.4		
1200		ø22.22 × t1.0			ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø25.4
1250	ø22.22 × t1.0		ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø25.4		
1300		ø22.22 × t1.0			ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø25.4
1350	ø22.22 × t1.0		ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø25.4		
1425		ø22.22 × t1.0			ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø25.4
1450	ø22.22 × t1.0		ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø25.4		
1500		ø22.22 × t1.0			ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø25.4
1560	ø22.22 × t1.0		ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø25.4		
1620		ø22.22 × t1.0			ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø25.4
1680	ø22.22 × t1.0		ø9.52 × t0.8	ø25.4 (ø22.22) × t1.0			ø12.7 × t0.8	ø25.4		

Please use C1220T-1/2H for ø19.05 or larger pipes.  
 Pipe sizes applicable to European installations are shown in parentheses.

Branch pipes



DIS-22-1G/DIS-180-1G

Header pipe




HEAD6-180-1G

Combination outdoor unit manifold





DOS-2A-3

DOS-3A-3

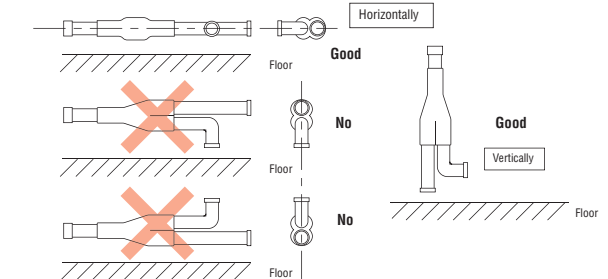

## Combination outdoor unit piping examples:

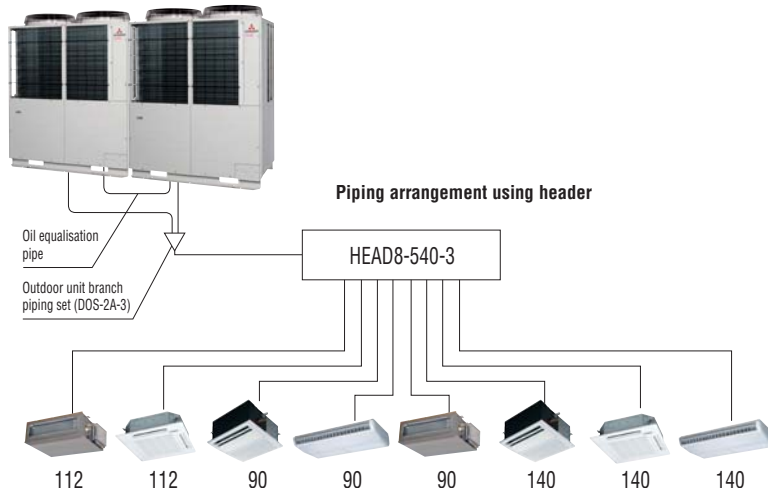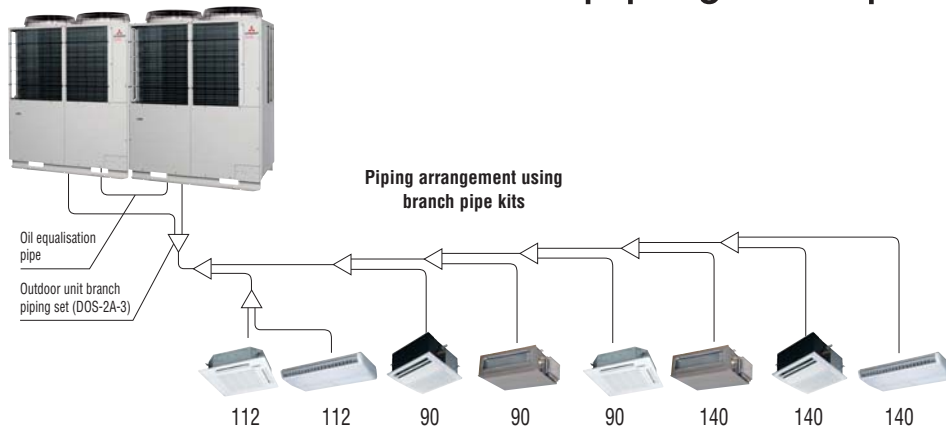

Outdoor unit's branch piping set

Outdoor unit	Branch piping set
For two units (for 615~1120)	DOS-2A-3
For three units (for 1200~1680)	DOS-3A-3

Indoor unit's first branch piping set

Total capacity of indoor units	Branch piping set	Header set	
		Model	Branches
~179	DIS-22-1G	HEAD4-22-1G	Max 4 branches
180~370	DIS-180-1G	HEAD6-180-1G	Max 6 branches
371~539	DIS-371-1G	HEAD8-371-2	Max 8 branches
540~	DIS-540-3	HEAD8-540-3	Max 8 branches

# KXZ electrical wiring – power supply


KXZ new design includes greatly simplified wiring requirements utilising a ‘polarity-free’ two wire control loop connecting the indoor units.

## Power wiring

Cables can be laid through the front, right, left or bottom of the outdoor unit casing.

Separate power supplies should be used for the outdoor unit (3phase) and the indoor units (1phase).


Only control wiring is connected from outdoor to indoor unit.

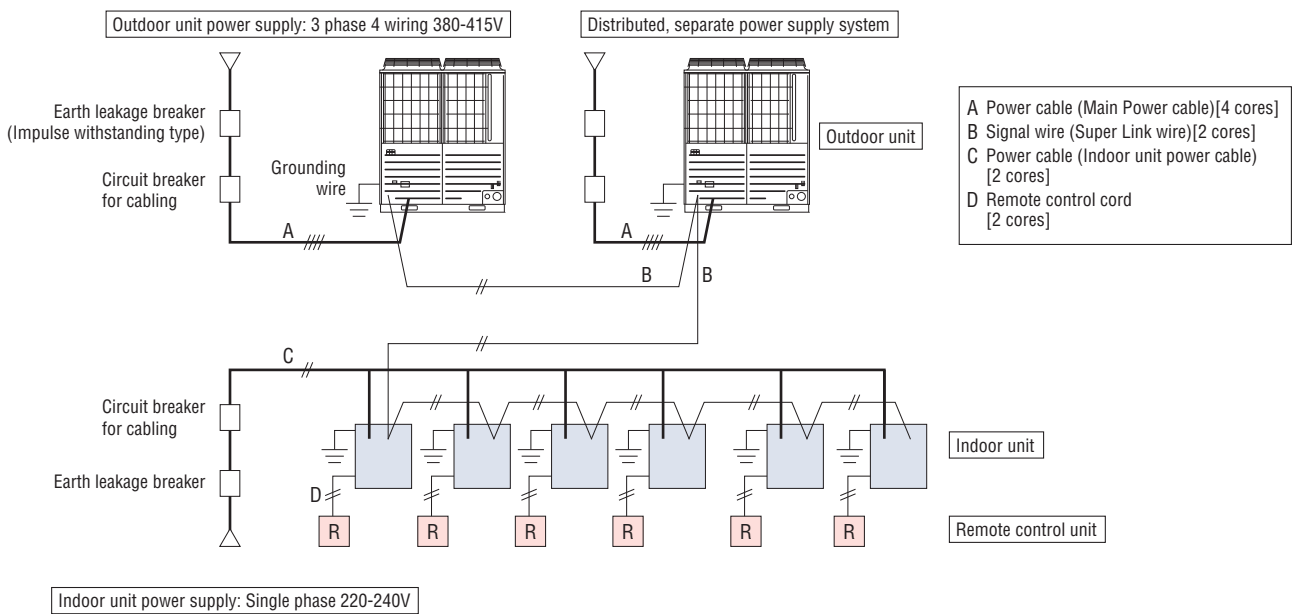

## CAUTION

If the earth leakage breaker is exclusively for ground fault protection, then you will need to install a circuit breaker for wiring work.

KXZ outdoor unit mechanical compartment

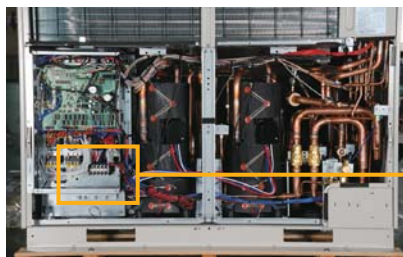

Electrical component box



Outdoor unit power supply terminal block

# KXZ electrical wiring – control wiring

1. The control wiring is 5 Volt DC, non-polarised, two wire connection notated as 'A1' and 'B1'. This 'AB' wiring connects outdoor unit to indoor unit and indoor unit to indoor unit.

2. This wiring must be a 2-core shielded cable size 0.75mm<sup>2</sup> or 1.25mm<sup>2</sup>.


	0.75mm <sup>2</sup>	1.25mm <sup>2</sup>
~1000m	YES	YES
1000~1500m	YES	NO

3. We recommend the both ends of the shield of the cable are connected to ground (earth) at all the indoor units and outdoor units.


4. When plural outdoor units are used,  
 •Connect the signal cable between indoor and outdoor units and the signal cable between outdoor units belonging to the same refrigerant line to A1 and B1.  
 •Connect the signal line between outdoor units on different refrigerant lines to A2 and B2.

5. For current specification of 2-core (AB) wiring, please consult your MHI dealer.

(1) When one outdoor unit is used

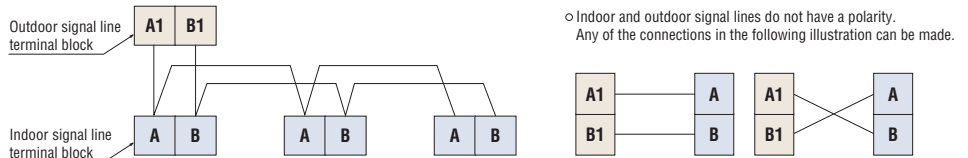


(2) When plural outdoor units are used

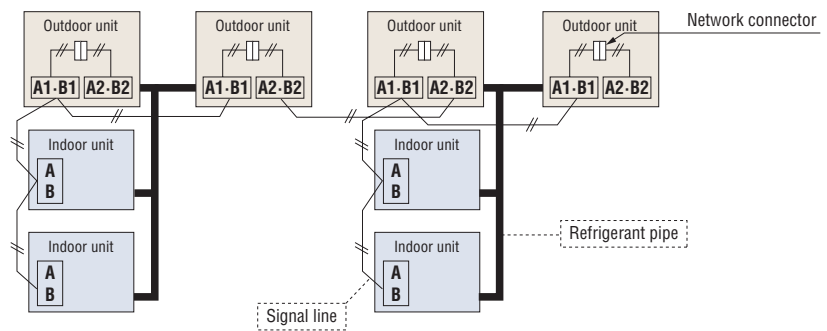


- (a) The maximum number of indoor units that can be connected in a system is 128 and it is possible to configure outdoor units and/or indoor units as an outdoor or indoor unit group connected with each other with two wires.
- (b) The signal wires can also be connected using the method shown below.

(3) The signal lines can also be connected using the method shown below.

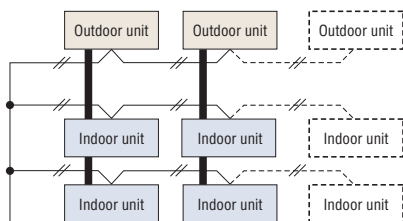

## Important


Loop wiring prohibited

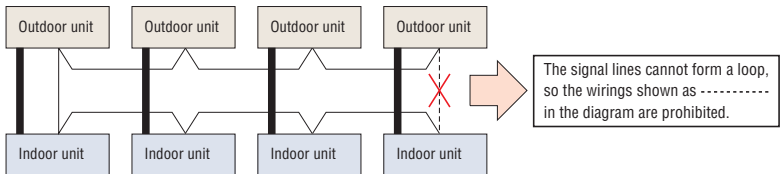

# Remote control wiring specifications

For interconnecting wiring between the remote control and indoor units (XY wiring) use 2-core cable size 0.3mm<sup>2</sup>. The maximum length of 2-core cable is 600 metres. Where the 2-core wiring exceeds 100m, use the wire size detailed on the table below.

Length (m)	Wire size
100 to 200	0.5mm <sup>2</sup> x 2 core
To 300	0.75mm <sup>2</sup> x 2 core
To 400	1.25mm <sup>2</sup> x 2 core
To 600	2.0mm <sup>2</sup> x 2 core

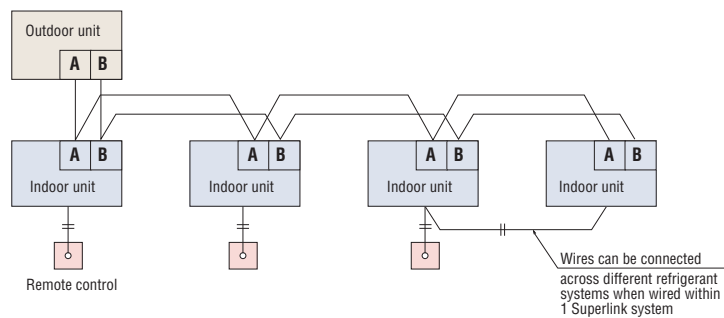





# Heat recovery systems - for simultaneous heating and cooling

The heat recovery systems operate with 3 inter-connecting pipes, thus commonly referred to as a '3-pipe system'.

The systems provide both heating and cooling operations to individual indoor units according to the room condition/requirement. The systems incorporate highly sophisticated control to condition multiple indoor areas, whatever their requirement for cooling or heating, for

applications where the building orientation (N, S, E, W) can mean that heat gain/loss varies on each side of the building.

The range starts from the 8HP model (22.4kW) cooling capacity, up to the largest capacity single outdoor unit in the industry (24HP) with 68.0kW cooling capacity. Outdoor units can also be "twinned" providing up to 48HP/136.0kW on a single system.



## KXRE6

8HP	10HP	12HP	12HP	14HP	16HP
FDC224KXRE6	FDC280KXRE6	FDC335KXRE6	FDC335KXRE6-K	FDC400KXRE6	FDC450KXRE6

18HP	20HP	20HP	22HP	24HP
FDC504KXRE6	FDC560KXRE6	FDC560KXRE6-K	FDC615KXRE6	FDC680KXRE6

26HP	28HP	30HP	32HP	34HP	36HP
FDC735KXRE6	FDC800KXRE6	FDC850KXRE6	FDC900KXRE6	FDC960KXRE6	FDC1010KXRE6
12+14	14+14	14+16	16+16	16+18	18+18
FDC335KXRE6-K FDC400KXRE6	FDC400KXRE6 FDC400KXRE6	FDC400KXRE6 FDC450KXRE6	FDC450KXRE6 FDC450KXRE6	FDC450KXRE6 FDC504KXRE6	FDC504KXRE6 FDC504KXRE6

38HP	40HP	42HP	44HP	46HP	48HP
FDC1065KXRE6	FDC1130KXRE6	FDC1180KXRE6	FDC1235KXRE6	FDC1300KXRE6	FDC1360KXRE6
18+20	20+20	20+22	22+22	22+24	24+24
FDC504KXRE6 FDC560KXRE6	FDC560KXRE6 FDC560KXRE6	FDC560KXRE6-K FDC615KXRE6	FDC615KXRE6 FDC615KXRE6	FDC615KXRE6 FDC680KXRE6	FDC680KXRE6 FDC680KXRE6

1. 12HP, 20HP, 22HP & 24HP are applied 3D compressor.

2. FDC335KXRE6-K & FDC560KXRE6-K are only used for combining with other models.

### Capacity connection


HP	KXRE6
8~16	200%
18~34	160%
36~48	130%

- In case that capacity connection is more than 130%, additional charge of refrigerant is required on site.
- In case of 8-34HP of the systems, if one or more indoor units of FDK, FDFL, FDFU and/or FDFW series are connected to the system, the total connecting capacity of indoor units should not exceed 130%.

Up to 80 indoor units can be connected to the largest capacity outdoor unit, with a range of 16 types of exposed or concealed indoor unit, in several capacities, a choice of 80 indoor units is available.


	※1				
FDT	FDTC	FDTW	FDTS	FDTQ	FDU
	※1				
FDUM	FDUT	FDUH	FDK	FDE	FDFW
FDFL	FDFU	FDU-F	SAF	SAF-DX	

※1 FDUT15KXE6F-E and FDTCT15KXE6F can not be connected to the systems.

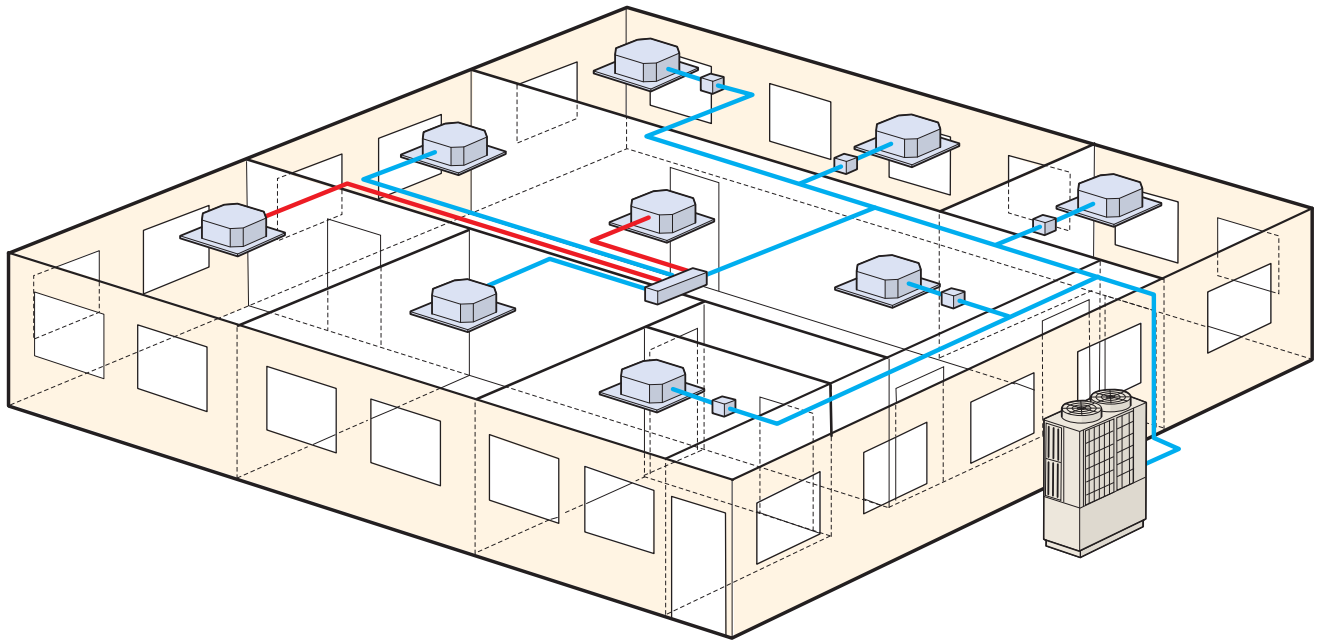

**Heat recovery systems - for simultaneous heating and cooling**

The system interconnecting pipework has a unique arrangement, with two of the interconnecting pipes routed through a PFD Distribution Controller, and the third pipe connected directly to each indoor unit from the main pipe run. This reduces installation time, and the number of brazed connections on site. The PFD Distribution Controllers are available for single connection, or as a combined PFD 4-way connection, with each connected unit having independent cooling or heating operation.

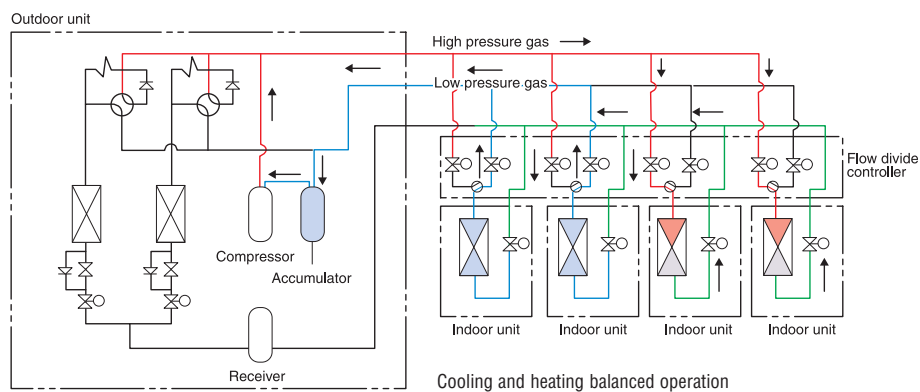

During defrosting or during automatic protection of a compressor, which is activated every several hours in heating operation, heating operation temporarily stops and restarts after some period. The series has the same automatic protection of compressor in cooling operation also. During this protection period air flow only comes on and cooling operation restarts after some period.

This model is not suitable for the usage of annual cooling operation such as for the server room, especially in the area where the outdoor air temperature becomes below 5°C. In case of mixed operation in cooling and heating mode below 5°C of outdoor air temperature, the cooling capacity may decrease in comparison with that for the operation only in cooling mode.




# Heat recovery 3-pipe systems 8, 10, 12, 14, 16HP (22.4kW – 45.0kW) for simultaneous heating and cooling

Model No.	Nominal Cooling Capacity
FDC224KXRE6	22.4kW
FDC280KXRE6	28.0kW
FDC335KXRE6	33.5kW
FDC400KXRE6	40.0kW
FDC450KXRE6	45.0kW

- Heat recovery systems offer high performance VRF for almost every type of building, with the capacity for simultaneous heating and cooling operations of individual indoor units. Energy efficiency is maximised by employing DC inverter compressors ONLY, and distributing surplus heat from cooling operations to areas where it is required (and vice versa) resulting in COP (in cooling) from 3.7 to 4.2.
- Connect from 50% up to 200% capacity indoor units.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.




Uniform footprint of all models (from 8HP-24 HP) allows continuous side-by-side installation

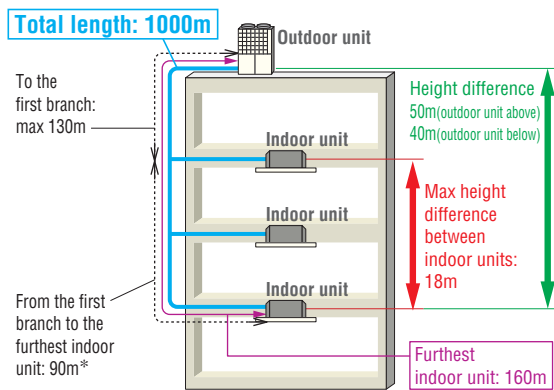

\* The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m.

Range of operation

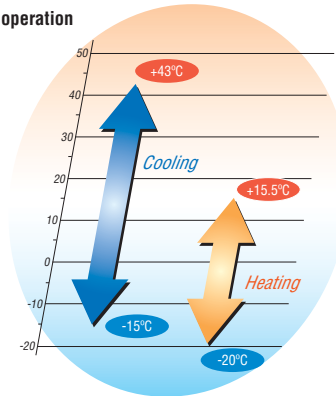


## Specifications

Item	Model	FDC224KXRE6	FDC280KXRE6	FDC335KXRE6	FDC400KXRE6	FDC450KXRE6	
Nominal horse power		8HP	10HP	12HP	14HP	16HP	
Power source		3 Phase 380-415V, 50Hz					
Nominal capacity	Cooling	22.4	28.0	33.5	40.0	45.0	
	Heating	25.0	31.5	37.5	45.0	50.0	
Electrical characteristics	Starting current	A					
	Power consumption	Cooling	5.90	8.08	9.98	11.61	13.49
		Heating	5.90	8.11	9.55	11.93	13.32
	Operating current	Cooling	9.1-8.3	12.9-11.7	15.9-14.8	19.0-17.4	21.6-19.8
Heating		9.2-8.4	12.8-11.8	15.5-14.2	19.9-18.2	22.0-20.1	
Exterior dimensions	HxWxD	mm					
Net weight	kg	269					
Refrigerant charge	R410A	8.7	9.9	11.4	11.5		
Sound pressure level	Cooling/Heating	dB(A)		62/63	60/60	62.5/62.5	
Refrigerant piping size	Liquid line	ø9.52(3/8")			ø12.7(1/2")		
	Suction Gas line	ø19.05(3/4")	ø25.4(1") [ø22.22(7/8")]		ø25.4(1") [ø28.58(1 1/8")]		
	Discharge Gas line	ø15.88(5/8")	ø19.05(3/4")		ø22.22(7/8")		
Capacity connection	%	50-200					
Number of connectable indoor units		20	25	30	36	40	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.  
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.  
 3. [ ] : Pipe sizes applicable to European installations are shown in parentheses.

# Dimensions

All measurements in mm.

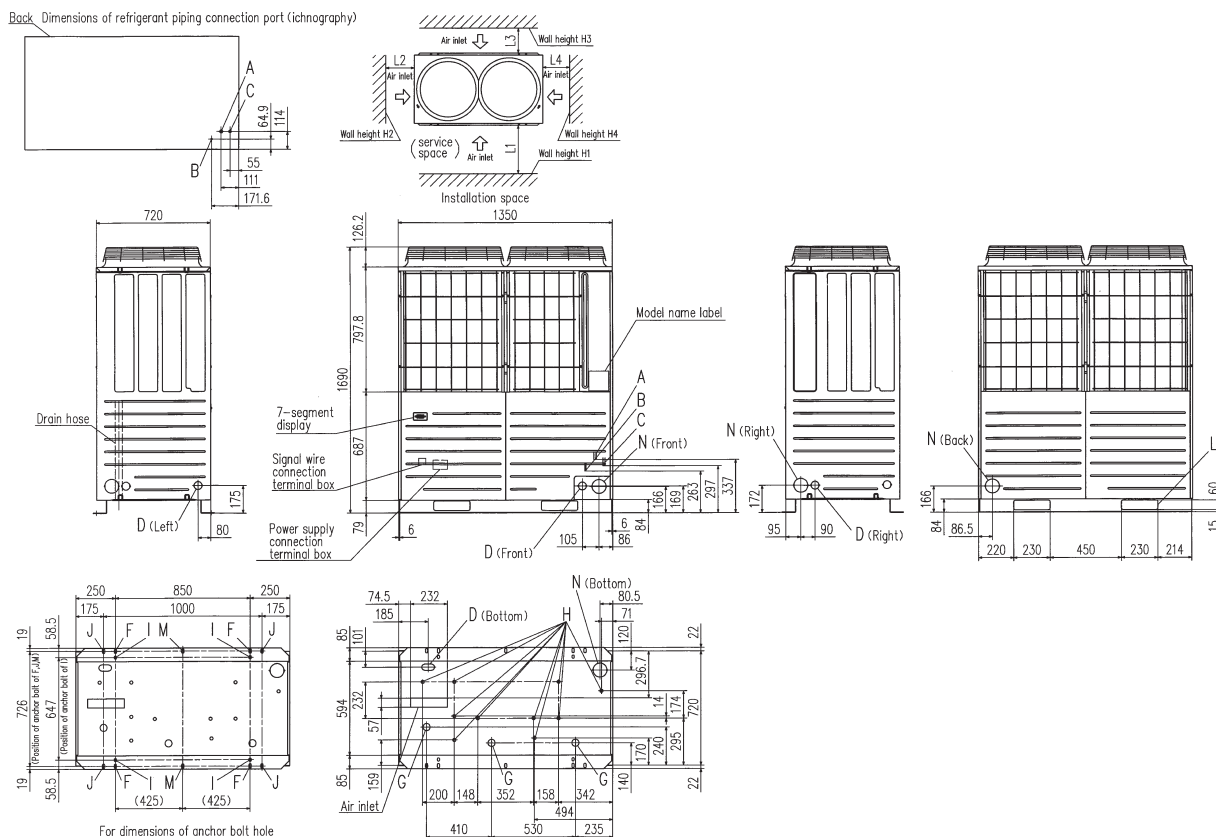

Mark	Content	224	280	335	335-K	400	450
A	Refrigerant suction gas piping connection entrance	ø19.05(Brazing)	ø22.22(Brazing)	ø25.4(Brazing)		ø28.58(Brazing)	
B	Refrigerant liquid piping connection entrance	ø9.52(Flare)		ø12.7(Flare)			
C	Refrigerant discharge gas piping connection entrance	ø15.88(Brazing)	ø19.05(Brazing)			ø22.22(Brazing)	
D	Power supply entry hole	ø50(right · left · front), long hole 40x80(under side)					
F	Anchor bolt hole	M10 x 4 places					
G	Drain waste water hose hole	ø45 x 3 places					
H	Drain hole	ø20 x 10 places					
K'	Refrigerant oil equalization piping connection entrance	ø9.52(Flare)					
L	Carrying in or hole for hanging	230x60					
N	Refrigerant piping exit hole	ø88(or ø100)					

\*14,16HP models only

## Notes:

- (1) Make sure to secure the unit with anchor bolts.
- (2) Make sure to allow the space of 2m or more above the unit.
- (3) Connect the refrigerant piping (suction gas side, discharge gas side, liquid side) at local site.
- (4) The refrigerant piping connection entrance and the power supply intake are of the half blank shape. Cut it with the nipper etc., when you use.
- (5) Use ø88 (or ø100) for the refrigerant piping connection entrance.
- (6) Please use the anchor hole (M10x10) marked I and M for a renewal purpose.
- (7) Please connect the oil equalization pipe marked K with only the outdoor combination unit. (for 14,16HP only)
- (8) Please use combination trestle (option) when you use the trestle by outdoor combination unit. (for 14,16HP only)

Installation example		
Dimensions	1	2
L1	500	Open
L2	10	10
L3	100	100
L4	10	Open
H1	1500	Open
H2	No limit	No limit
H3	1000	No limit
H4	No limit	Open




# Heat recovery 3-pipe systems 18, 20, 22, 24HP (50.4kW – 68.0kW) for simultaneous heating and cooling

Model No.	Nominal Cooling Capacity
FDC504KXRE6	50.4kW
FDC560KXRE6	56.0kW
FDC615KXRE6	61.5kW
FDC680KXRE6	68.0kW

- Heat recovery systems offer high performance VRF for almost every type of building, with the capacity for simultaneous heating and cooling operations of individual indoor units. Energy efficiency is maximised by employing DC inverter compressors ONLY, and distributing surplus heat from cooling operations to areas where it is required (and vice versa) resulting in COP (in cooling) from 2.6 to 3.3.
- Connect from 50% up to 160% capacity indoor units.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.




Uniform footprint of all models (from 8HP~24HP) allows continuous side-by-side installation

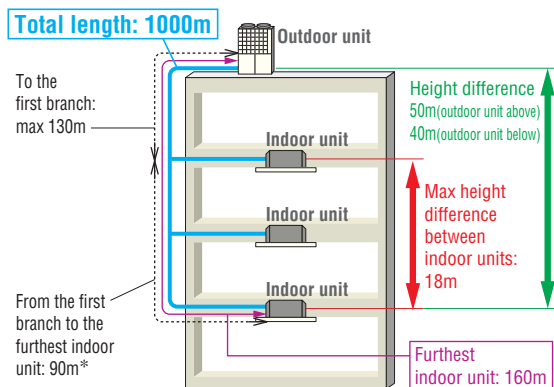

\*The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m.

Range of operation

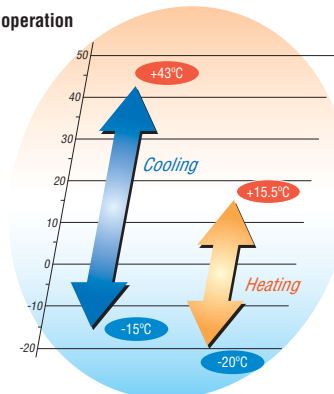

## Specifications


Item	Model	FDC504KXRE6	FDC560KXRE6	FDC615KXRE6	FDC680KXRE6	
Nominal horse power		18HP	20HP	22HP	24HP	
Power source		3 Phase 380-415V, 50Hz				
Nominal capacity	Cooling	50.4	56.0	61.5	68.0	
	Heating	56.5	63.0	69.0	73.0	
Electrical characteristics	Starting current	8				
	Power consumption	Cooling	15.18	17.95	21.47	25.99
		Heating	15.12	16.79	19.11	19.69
	Operating current	Cooling	23.8-21.8	28.4-26.0	34.7-31.8	44.9-41.1
Heating		25.2-23.1	28.0-25.7	31.6-28.9	34.0-31.1	
Exterior dimensions	HxWxD	2048x1350x720				
Net weight	kg	380		399		
Refrigerant charge	R410A	11.5		11.5		
Sound pressure level	Cooling/Heating	62/62	63.5/63.5	64/64.5	65.5/65.5	
Refrigerant piping size	Liquid line	ø12.7(1/2")				
	Suction Gas line	ø28.58(1 1/8")				
	Discharge Gas line	ø22.22(7/8")		ø25.4(1") [ø22.22(7/8")]		
Capacity connection	%	50~160				
Number of connectable indoor units		36	40	44	49	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.  
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.  
3. [ ] : Pipe sizes applicable to European installations are shown in parentheses.



# Dimensions

All measurements in mm.

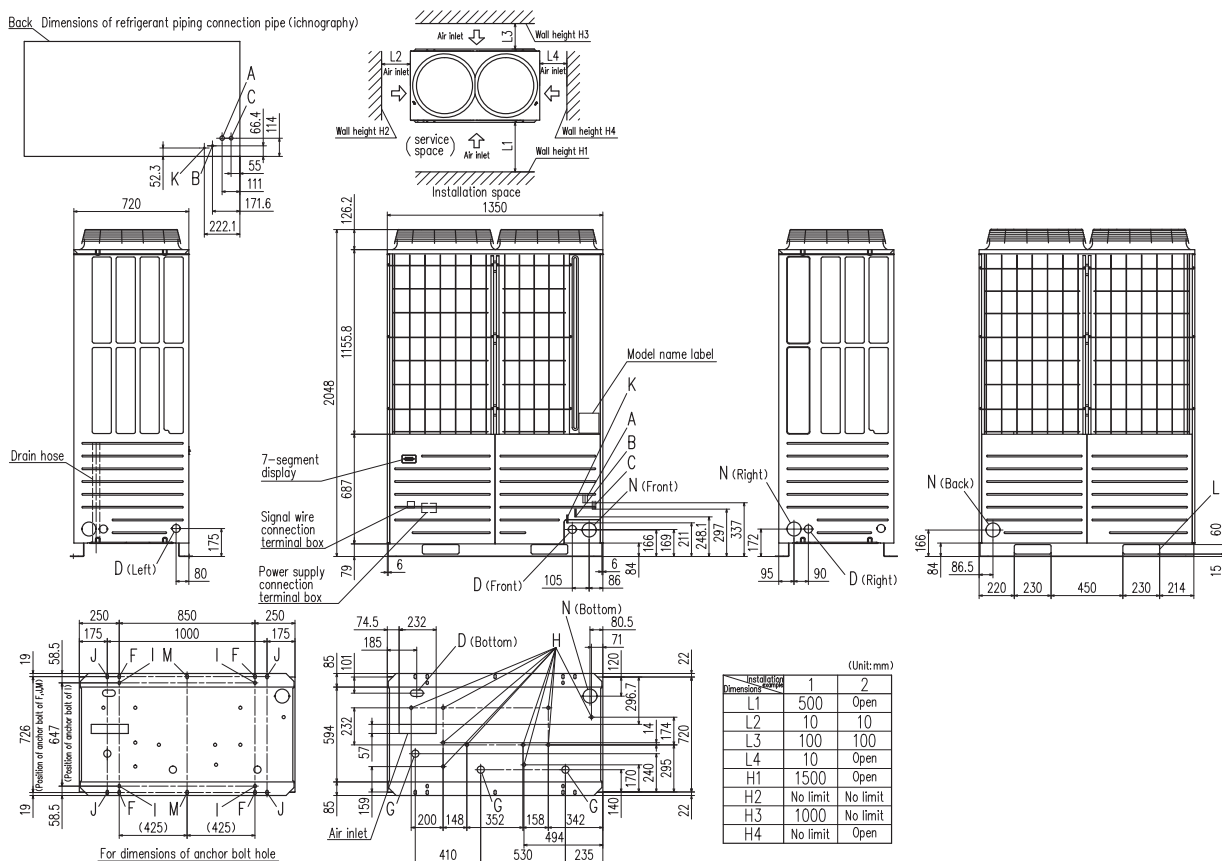

Mark	Content	504	560	560-K	615	680
A	Refrigerant suction gas piping connection entrance	ø28.58(Brazing)				
B	Refrigerant liquid piping connection entrance	ø12.7(Flare)				
C	Refrigerant discharge gas piping connection entrance	ø22.22(Brazing)			ø25.4(Brazing)	
D	Power supply entry hole	ø50(right · left · front), long hole 40x80(under side)				
F	Anchor bolt hole	M10 x 4 places				
G	Drain waste water hose hole	ø45 x 3 places				
H	Drain hole	ø20 x 10 places				
K	Refrigerant oil equalization piping connection pipe	ø9.52(Flare)				
L	Carrying in or hole for hanging	230x60				
N	Refrigerant piping exit hole	ø88(or ø100)				

Installation example		
Dimensions	1	2
L1	500	Open
L2	10	10
L3	100	100
L4	10	Open
H1	1500	Open
H2	No limit	No limit
H3	1000	No limit
H4	No limit	Open

## Notes:

- (1) Make sure to secure the unit with anchor bolts.
- (2) Make sure to allow the space of 2m or more above the unit.
- (3) Connect the refrigerant piping (suction gas side, discharge gas side, liquid side) at local site.
- (4) The refrigerant piping connection entrance and the power supply intake are of the half blank shape. Cut it with the nipper etc., when you use.
- (5) Use ø88 (or ø100) for the refrigerant piping connection entrance.
- (6) Please use the anchor hole (M10x10) marked I and J and M for a renewal purpose.
- (7) Please connect the oil equalization pipe marked K with only the outdoor combination unit.
- (8) Please use combination trestle (option) when you use the trestle by outdoor combination unit.




# Heat recovery 3-pipe combination systems 26, 28, 30, 32HP (73.5kW – 90.0kW) for simultaneous heating and cooling

Model No.	Nominal Cooling Capacity
FDC735KXRE6 (FDC335-K+FDC400)	73.5kW
FDC800KXRE6 (FDC400x2)	80.0kW
FDC850KXRE6 (FDC400+FDC450)	85.0kW
FDC900KXRE6 (FDC450x2)	90.0kW




Uniform footprint of all models (from 8HP-24HP) allows continuous side-by-side installation

- Heat recovery systems offer high performance VRF for almost every type of building, with the capacity for simultaneous heating and cooling operations of individual indoor units. Energy efficiency is maximised by employing DC inverter compressors ONLY, and distributing surplus heat from cooling operations to areas where it is required (and vice versa) resulting in COP (in cooling) from 3.3 to 3.5.
- Connect from 50% up to 160% capacity indoor units.
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.

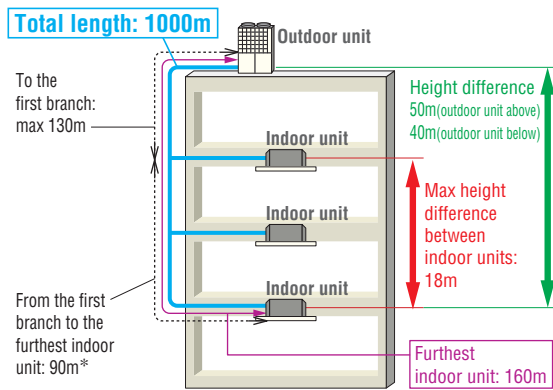

\*The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m.

Range of operation

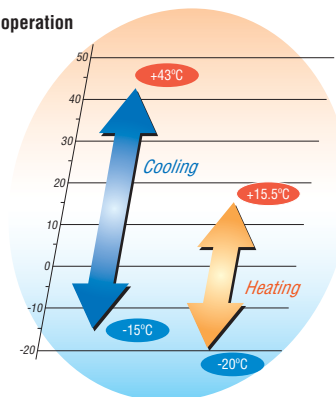


## Specifications

Item	Model	FDC735KXRE6	FDC800KXRE6	FDC850KXRE6	FDC900KXRE6		
Combination (FDC)		335KXRE6-K	400KXRE6	400KXRE6	450KXRE6		
		400KXRE6	400KXRE6	450KXRE6	450KXRE6		
Nominal horse power		26HP	28HP	30HP	32HP		
Power source		3 Phase 380-415V, 50Hz					
Nominal capacity	Cooling	kW	73.5	80.0	85.0	90.0	
	Heating	kW	82.5	90.0	95.0	100.0	
Electrical characteristics	Starting current	A	16				
	Power consumption	Cooling	kW	21.08	23.22	25.10	26.98
		Heating	kW	21.3	23.86	25.25	26.64
	Operating current	Cooling	A	34.4-31.5	38.0-34.8	40.6-37.2	43.2-39.6
Heating		A	35.4-32.4	39.8-36.4	41.9-38.3	44.0-40.2	
Exterior dimensions	HxWxD	mm	1690x2700x720				
Net weight		kg	358x2				
Refrigerant charge	R410A	kg	11.5x2				
Refrigerant piping size	Liquid line		ø15.88(5/8")				
	Suction Gas line	in (mm)	ø31.75(1 1/4") [ø34.92(1 3/8")]				
	Discharge Gas line		ø25.4(1") [ø28.58(1 1/8")]		ø28.58(1 1/8")		
Capacity connection	%	50~160					
Number of connectable indoor units		53	58	61	65		

1. The data are measured under the following conditions (ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.  
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.  
 3. [ ] : Pipe sizes applicable to European installations are shown in parentheses.

# Dimensions

All measurements in mm.

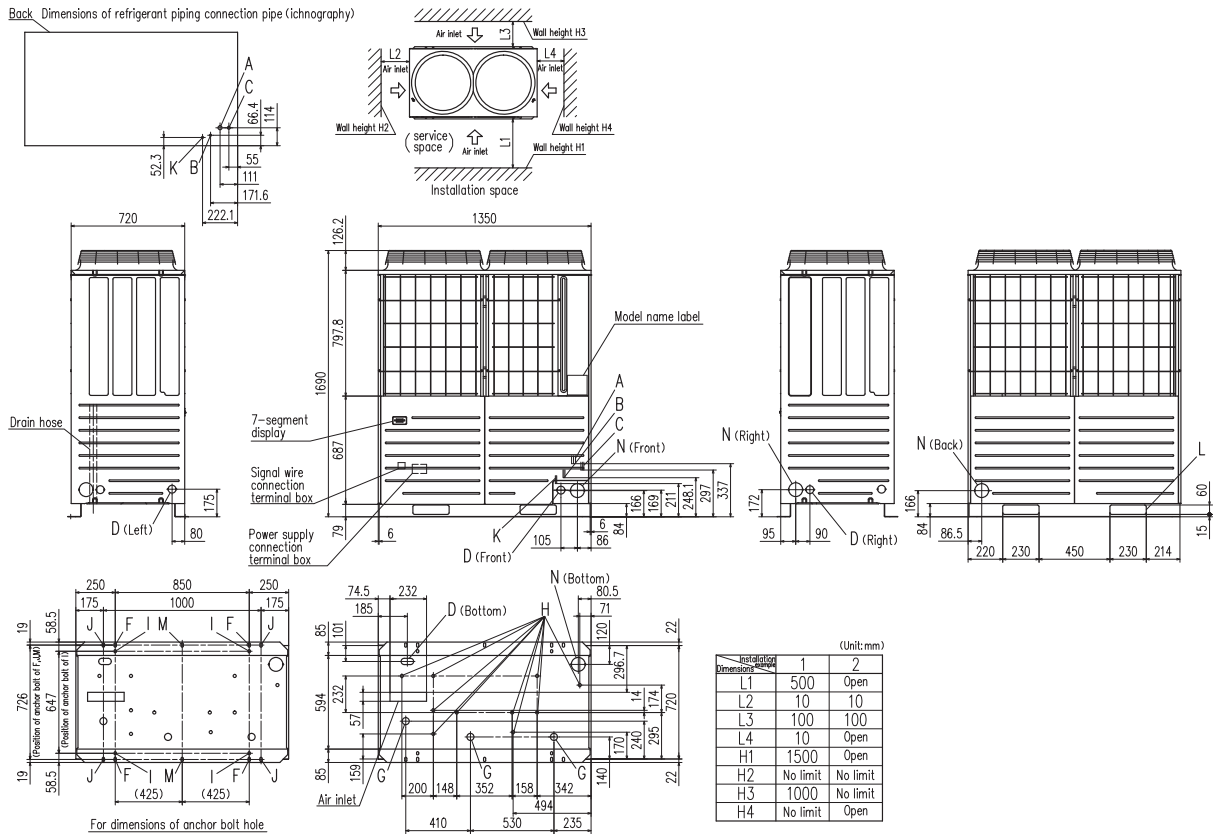

Mark	Content	335-K	400	450
A	Refrigerant suction gas piping connection entrance	ø25.4(Brazing)		ø28.58(Brazing)
B	Refrigerant liquid piping connection entrance	ø12.7(Flare)		
C	Refrigerant discharge gas piping connection entrance	ø19.05(Brazing)	ø22.22(Brazing)	
D	Power supply entry hole	ø50(right · left · front), long hole 40x80(under side)		
F	Anchor bolt hole	M10 x 4 places		
G	Drain waste water hose hole	ø45 x 3 places		
H	Drain hole	ø20 x 10 places		
K*	Refrigerant oil equalization piping connection entrance	ø9.52(Flare)		
L	Carrying in or hole for hanging	230x60		
N	Refrigerant piping exit hole	ø88(or ø100)		

Installation example		
Dimensions	1	2
L1	500	Open
L2	10	10
L3	100	100
L4	10	Open
H1	1500	Open
H2	No limit	No limit
H3	1000	No limit
H4	No limit	Open

\*14,16HP models only

## Notes:

- (1) Make sure to secure the unit with anchor bolts.
- (2) Make sure to allow the space of 2m or more above the unit.
- (3) Connect the refrigerant piping (suction gas side, discharge gas side, liquid side) at local site.
- (4) The refrigerant piping connection entrance and the power supply intake are of the half blank shape. Cut it with the nipper etc., when you use.
- (5) Use ø88 (or ø100) for the refrigerant piping connection entrance.
- (6) Please use the anchor hole (M10x10) marked I and J and M for a renewal purpose.
- (7) Please connect the oil equalization pipe marked K with only the outdoor combination unit. (for 14,16HP only)
- (8) Please use combination trestle (option) when you use the trestle by outdoor combination unit. (for 14,16HP only)



# Heat recovery 3-pipe combination systems

## 34, 36, 38, 40, 42, 44, 46, 48HP (96.0kW – 136.0kW)


for simultaneous *heating* and *cooling*



Model No.	Nominal Cooling Capacity
FDC960KXRE6 (FDC450+FDC504)	96.0kW
FDC1010KXRE6 (FDC504x2)	101.0kW
FDC1065KXRE6 (FDC504+FDC560)	106.5kW
FDC1130KXRE6 (FDC560x2)	113.0kW
FDC1180KXRE6 (FDC560-K+FDC615)	118.0kW
FDC1235KXRE6 (FDC615x2)	123.5kW
FDC1300KXRE6 (FDC615+FDC680)	130.0kW
FDC1360KXRE6 (FDC680x2)	136.0kW




- Heat recovery systems offer high performance VRF for almost every type of building, with the capacity for simultaneous heating and cooling operations of individual indoor units. Energy efficiency is maximised by employing DC inverter compressors ONLY, and distributing surplus heat from cooling operations to areas where it is required (and vice versa) resulting in COP (in cooling) from 3.3 to 3.8.
- Connect from 50% up to 130% capacity indoor units (960KXRE6:160%).
- Industry leading total piping length up to 1000m and a maximum pipe run of 160m.

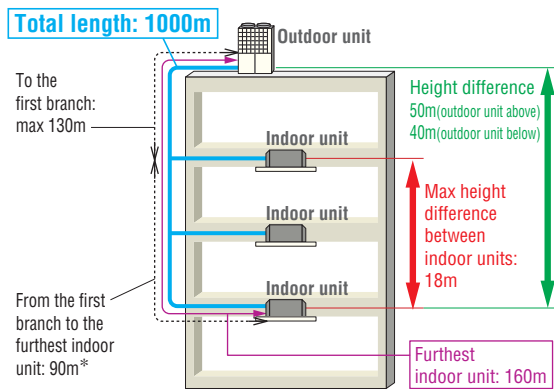

\* The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m.

Range of operation

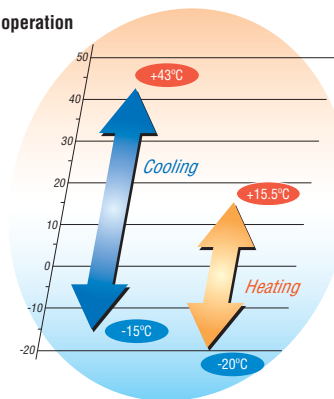


## Specifications

Item	Model	FDC960KXRE6	FDC1010KXRE6	FDC1065KXRE6	FDC1130KXRE6	FDC1180KXRE6	FDC1235KXRE6	FDC1300KXRE6	FDC1360KXRE6	
		Combination (FDC)	450KXRE6 504KXRE6	504KXRE6 504KXRE6	504KXRE6 560KXRE6	560KXRE6 560KXRE6	560KXRE6 615KXRE6	560KXRE6-K 615KXRE6	615KXRE6 615KXRE6	615KXRE6 680KXRE6
Nominal horse power		34HP	36HP	38HP	40HP	42HP	44HP	46HP	48HP	
Power source		3 Phase 380-415V, 50Hz								
Nominal capacity	Cooling	96.0	101.0	106.5	113.0	118.0	123.5	130.0	136.0	
	Heating	108.0	113.0	119.5	127.0	132.0	138.0	142.0	146.0	
Electrical characteristics	Starting current	A 16								
	Power consumption	Cooling	28.67	30.36	33.13	35.9	39.42	42.94	47.46	51.98
		Heating	28.44	30.24	31.91	33.58	35.9	38.22	38.80	39.38
	Operating current	Cooling	45.4-41.6	47.6-43.6	52.2-47.8	56.8-52.0	63.1-57.8	69.4-63.6	79.6-72.9	89.8-82.2
Heating		47.2-43.2	50.4-46.2	53.2-48.8	56.0-51.4	59.6-54.6	63.2-57.8	65.6-60.0	68.0-62.2	
Exterior dimensions	HxWxD	mm 2048x2700x720								
Net weight	kg	358+380	380x2				399x2			
Refrigerant charge	R410A	kg 11.5x2								
Refrigerant piping size	Liquid line	ø15.88(5/8")			ø19.05(3/4")					
	Suction Gas line	in (mm) ø31.75(1 1/4") [ø34.92(1 3/8")]								
	Discharge Gas line	ø28.58(1 1/8")								
Capacity connection	%	50-160				50-130				
Number of connectable indoor units		69	59	62	66	69	72	76	80	

1. The data are measured under the following conditions (ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.  
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.  
 3. [ ] : Pipe sizes applicable to European installations are shown in parentheses.

# Dimensions

All measurements in mm.

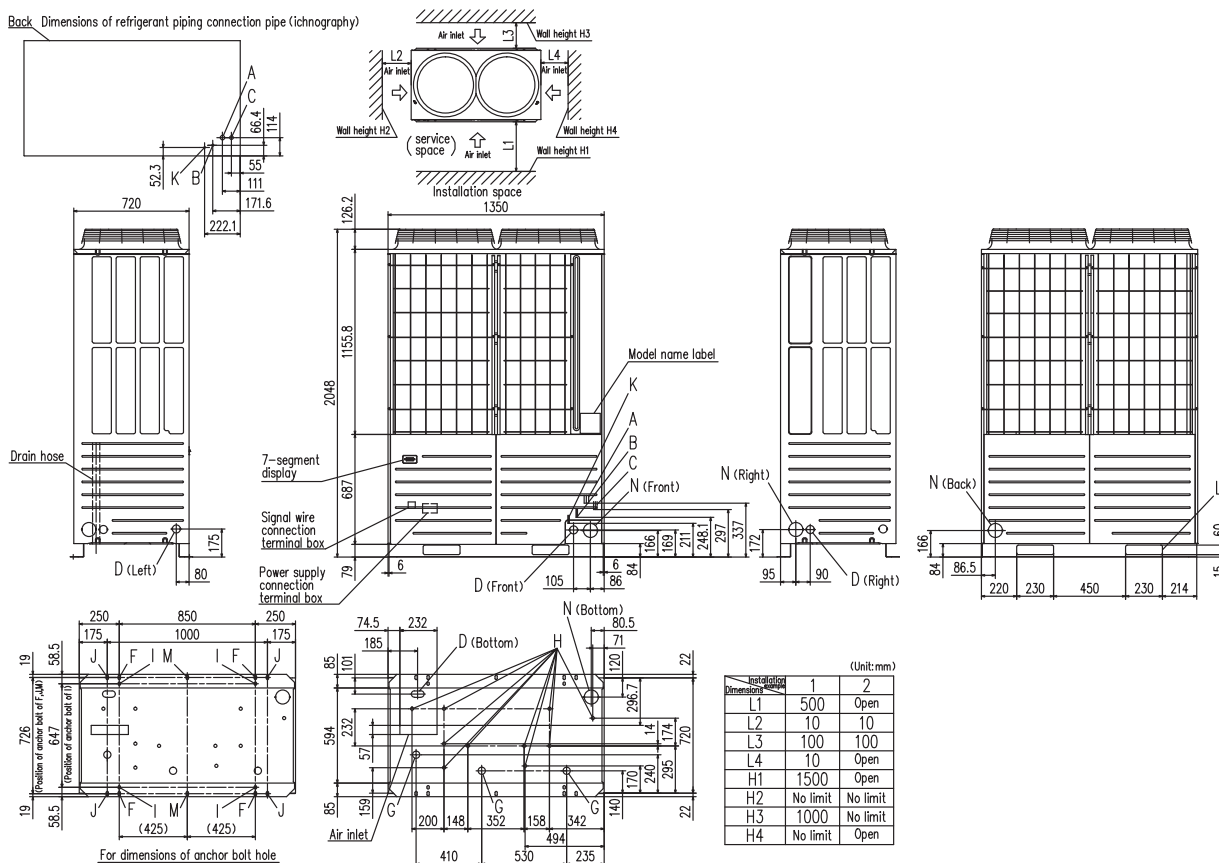

Mark	Content	504	560	560-K	615	680
A	Refrigerant suction gas piping connection entrance	ø28.58(Brazing)				
B	Refrigerant liquid piping connection entrance	ø12.7(Flare)				
C	Refrigerant discharge gas piping connection entrance	ø22.22(Brazing)		ø25.4(Brazing)		
D	Power supply entry hole	ø50(right · left · front),long hole 40x80(under side)				
F	Anchor bolt hole	M10 x 4 places				
G	Drain waste water hose hole	ø45 x 3 places				
H	Drain hole	ø20 x 10 places				
K	Refrigerant oil equalization piping connection pipe	ø9.52(Flare)				
L	Carrying in or hole for hanging	230x60				
N	Refrigerant piping exit hole	ø88(or ø100)				

Installation example		
Dimensions	1	2
L1	500	Open
L2	10	10
L3	100	100
L4	10	Open
H1	1500	Open
H2	No limit	No limit
H3	1000	No limit
H4	No limit	Open

## Notes:

- (1) Make sure to secure the unit with anchor bolts.
- (2) Make sure to allow the space of 2m or more above the unit.
- (3) Connect the refrigerant piping (suction gas side, discharge gas side, liquid side) at local site.
- (4) The refrigerant piping connection entrance and the power supply intake are of the half blank shape. Cut it with the nipper etc., when you use.
- (5) Use ø88 (or ø100) for the refrigerant piping connection entrance.
- (6) Please use the anchor hole (M10x10) marked I and J and M for a renewal purpose.
- (7) Please connect the oil equalization pipe marked K with only the outdoor combination unit.
- (8) Please use combination trestle (option) when you use the trestle by outdoor combination unit.





# PFD refrigerant flow branch control

## Branch control

- PFD1123-E
- PFD1803-E
- PFD2803-E
- PFD1123X4-E

## Total downstream indoor unit capacity

- less than 11.2kW
- less than 18.0kW
- 28.0kW or less
- less than 44.8kW(less than 11.2kWx4 branches)



Relay kit  
(Relay kit comes attached to the branch control)

- The remote control setting (as individual indoor unit on-off, temperature setting other than cooling/heating mode control) is possible with one remote control connected to each indoor unit, while at the same time, Center Control (SC-SL1N/2NA/4-AE) can be used together with the individual remote control.
- It is necessary to set the central control to use this function. Please refer to the Installation Manual for details.

- In case of the mode changeover from cooling to heating and from cooling to heating, by the use of only the indoor units and PFD box combination, the mode changeover sound was reduced. All this made possible without turning off the compressor and at the same time without the reduction of capacity.


- The risk of refrigerant leakage was reduced by changing piping connection at the PFD box to brazing method.

- By the use of optional PFD box extension cable that has a connector at ends, makes it possible to further separate the indoor unit and PFD box. This will enable the PFD box to be located away from the indoor unit and help reduce the influence of sound caused by PFD box and refrigerant flow.

extension cable 15m




PFD-15WR-E (option)

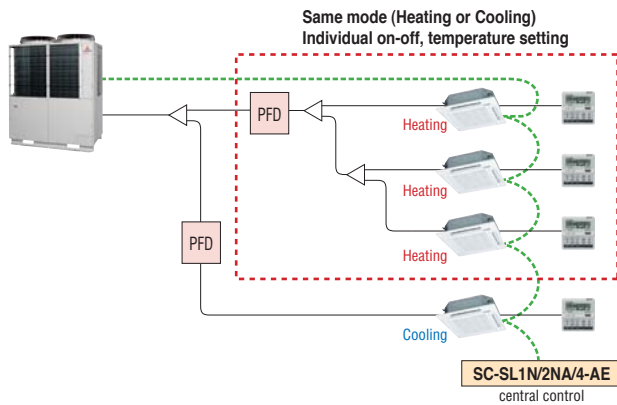


## Easy installation

New PFD design means the connection of the indoor unit liquid pipe is made directly to the liquid line - bypassing the PFD. This means (x2) less pipe connections per indoor unit, reducing installation time and cost.



The PFD is connected to the indoor unit by 3 core signal wire via a relay kit (supplied) to be located within 2m of each other. The indoor unit however can be up to 40m away. Power to the PFD can be connected from the indoor unit or other supply.

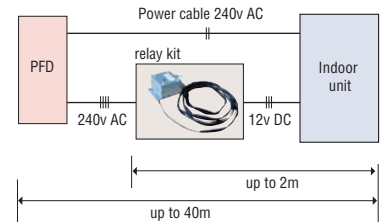


Groups of indoor units can be connected up to a total capacity 44.8kW to a single PFD with branch piping and all units in that group will operate in the same mode only (cooling or heating).

We also have introduced the 4-way PFD control PFD1123X4-E which can connect up to four indoor units with individual control - simultaneous cooling or heating.



4-Way PFD box

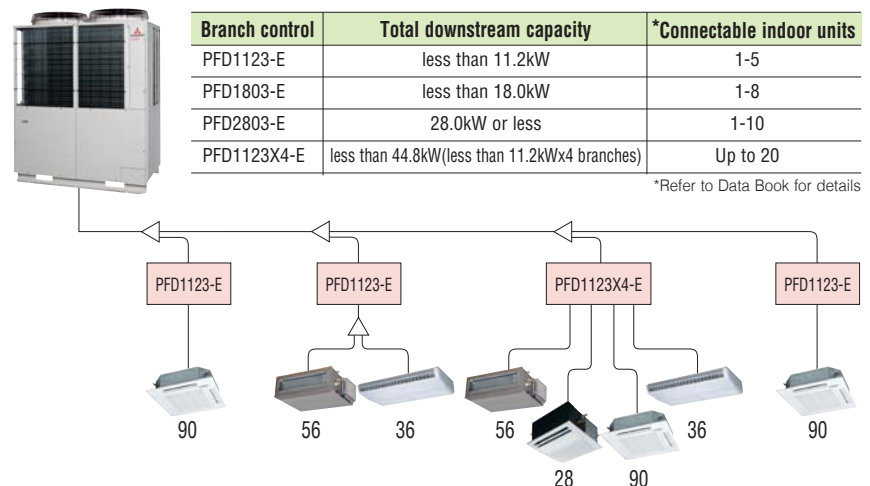


Branch control	Total downstream capacity	*Connectable indoor units
PFD1123-E	less than 11.2kW	1-5
PFD1803-E	less than 18.0kW	1-8
PFD2803-E	28.0kW or less	1-10
PFD1123X4-E	less than 44.8kW(less than 11.2kWx4 branches)	Up to 20

\*Refer to Data Book for details


# Dimensions

All measurements in mm.


## PFD1123-E

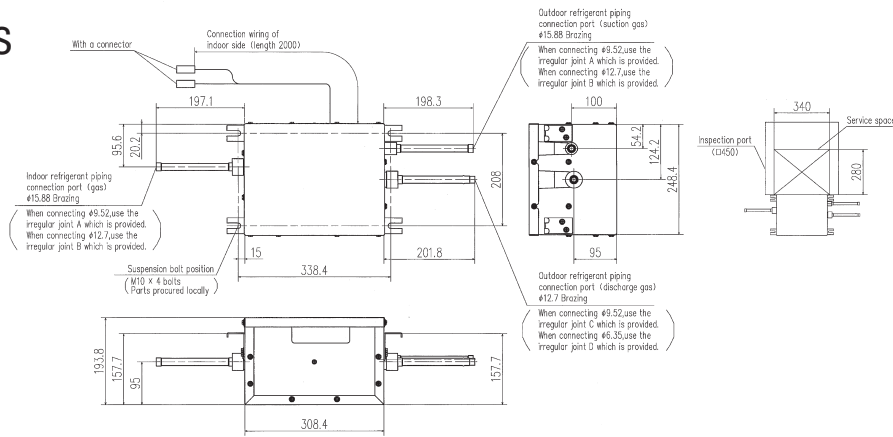


## PFD1803-E

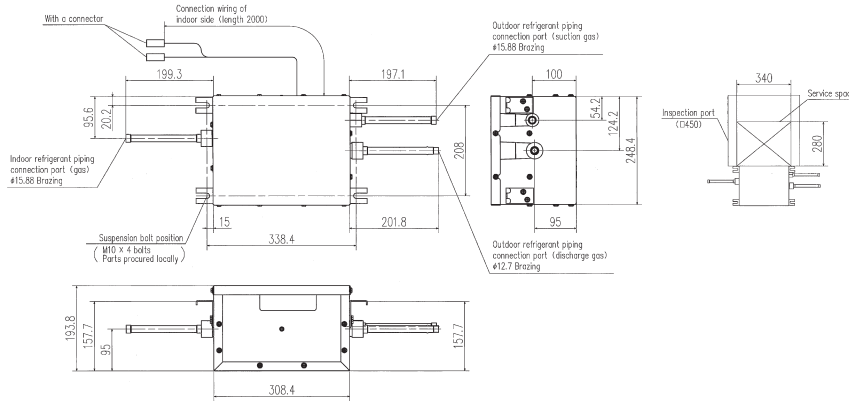

## PFD2803-E

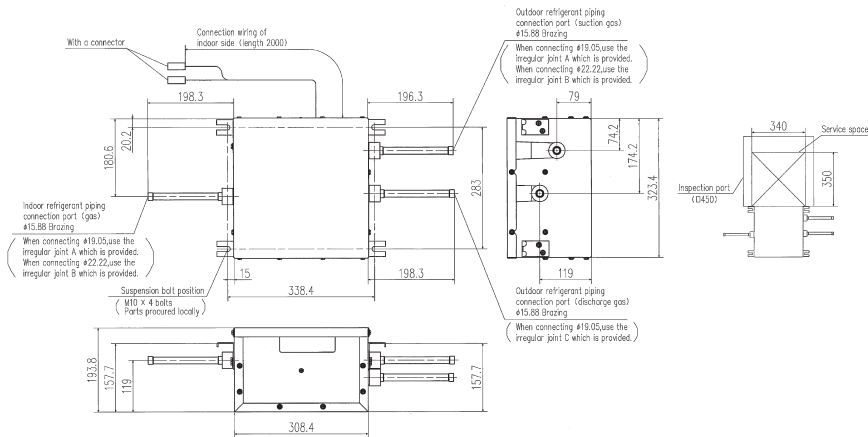

## PFD1123X4-E

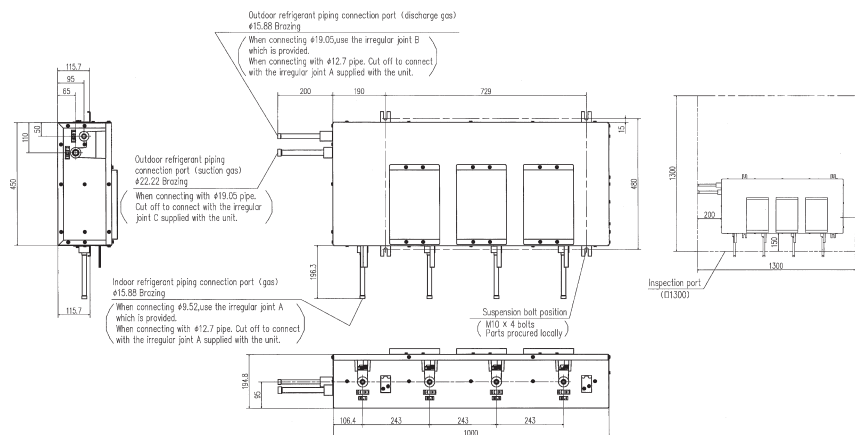



# Refrigerant piping

## Installation of Interconnecting Pipework

The heat recovery systems are manufactured to the highest standards of quality and reliability. It is imperative the method of installation and the materials used are also to high standards, to ensure trouble free operation and long term reliability.

The interconnecting pipework must be installed by a competent and trained engineer. Refrigeration quality copper tube must be used, soft copper coils or half-hard straight lengths. The refrigeration quality tube must be soft drawn seamless high grade copper pipe. The copper tube must be selected taking into account the higher operating pressures of R410A refrigerant, and that high pressures will occur throughout the system because of the reverse cycle operation. All pipework material used should be EN12735 European standard.

The supplied branch pipe kits, must be used to make connections to indoor units, and the supplied manifold kits must be used to make connections between outdoor units (where applicable); it is not permitted to use standard fittings such as elbows, tees etc. The branch pipes shall be installed in accordance with the manufacturer's instructions, allowing unrestricted flow of refrigerant, and in accordance with European standard E378. All brazed joints shall be made with dry nitrogen purge to ensure the prevention of oxidation to the internal surface of the copper pipes.

The ingress of moisture, dirt and any other contaminants to the interior of the copper pipes, and air conditioning units, must be prevented during the installation procedure. After the installation of pipework, prior to the



connection of the outdoor units, and sealing of insulation joints, the pipework must be pressure tested for leakage, using dry nitrogen.

## Additional Refrigerant

Additional R410A refrigerant only shall be used, and must be charged by weight only, using electronic scales. The amount of additional refrigerant must be accurately calculated from the manufacturer's data, based on the length and diameter of each section of the liquid refrigerant pipework of the system.

The products contains fluorinated greenhouse gases covered by Kyoto protocol.

## Single outdoor unit piping examples:

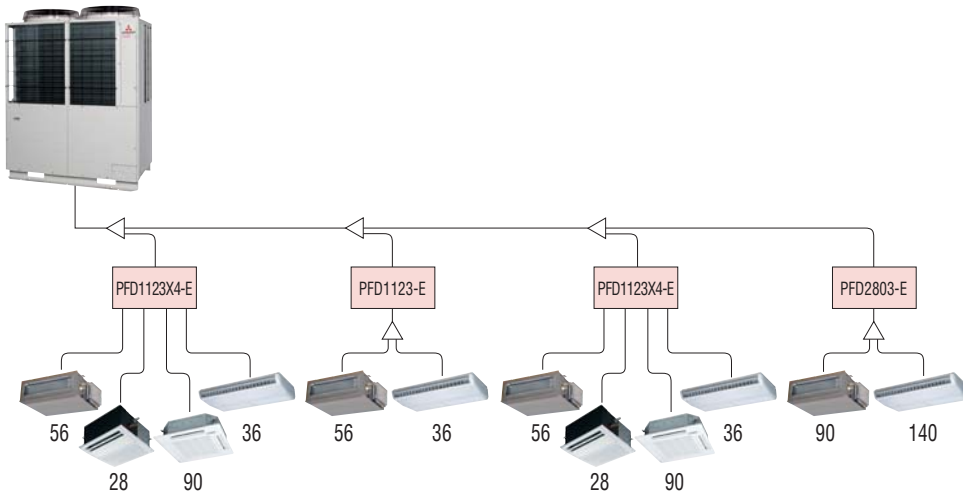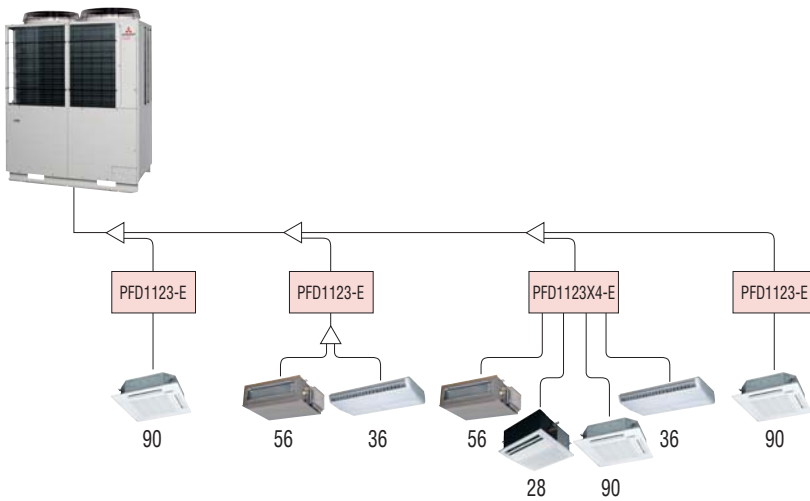

# Refrigerant piping

Pipe sizes applicable to European installations.

Outdoor unit (HP)	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48
Liquid pipe	ø9.52		ø12.7						ø15.88						ø19.05						
Suction Gas pipe	ø19.05		ø22.22		ø28.58						ø34.92										
Discharge Gas Pipe	ø15.88		ø19.05		ø22.22						ø28.58										
Liquid pipe	ø12.7				ø15.88				ø19.05				ø22.22								
Suction Gas pipe	ø22.22				ø28.58				ø34.92												
Discharge Gas Pipe	ø15.88		ø19.05		ø22.22						ø28.58										



mm	inch	mm	inch
ø9.52	3/8"	ø28.58	1 1/8"
ø12.7	1/2"	ø31.8	1 1/4"
ø15.88	5/8"	ø34.92	1 3/8"
ø19.05	3/4"	ø38.1	1 1/2"
ø22.22	7/8"	ø44.5	1 3/4"
ø25.4	1"	ø50.8	2"



DIS-22-1-RG/DIS-180-1-RG



DOS-2A-1-RG

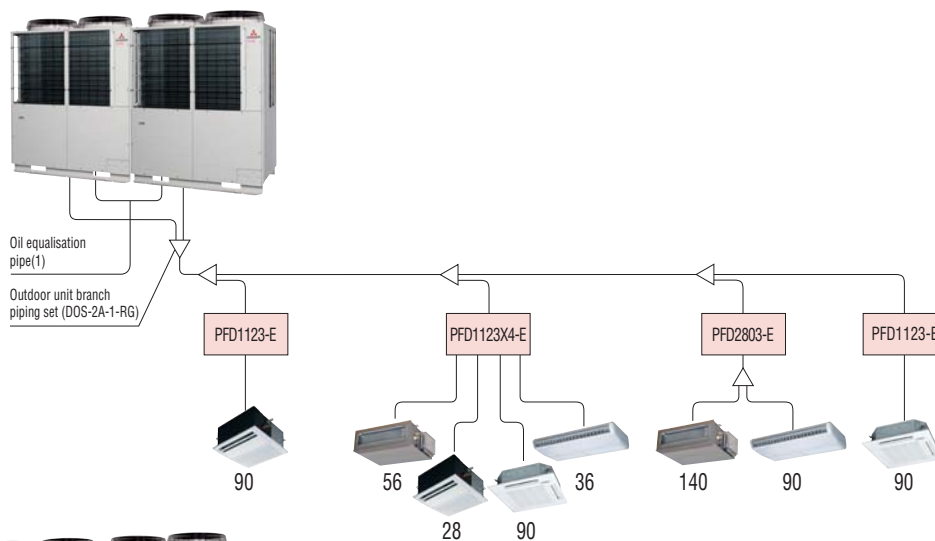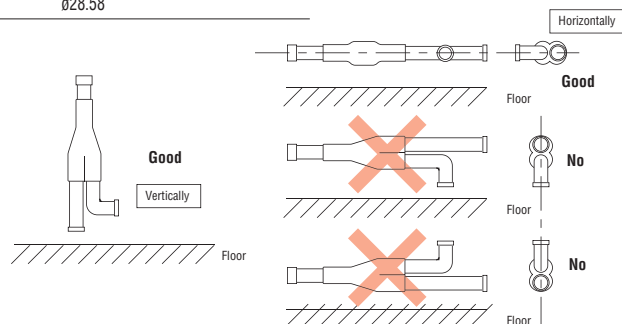

Outdoor unit's branch piping set


Outdoor unit	Branch piping set
2 units (for 735~1360)	DOS-2A-1-RG

Indoor unit's first branch piping set

Total capacity of indoor units	Branch piping set
~179	DIS-22-1-RG
180~370	DIS-180-1-RG
371~539	DIS-371-2-RG
540~	DIS-540-2-RG

For Down Stream of PFD box

Total capacity of indoor units	Branch piping set
~179	DIS-22-1G
180~370	DIS-180-1G
371~539	DIS-371-1G

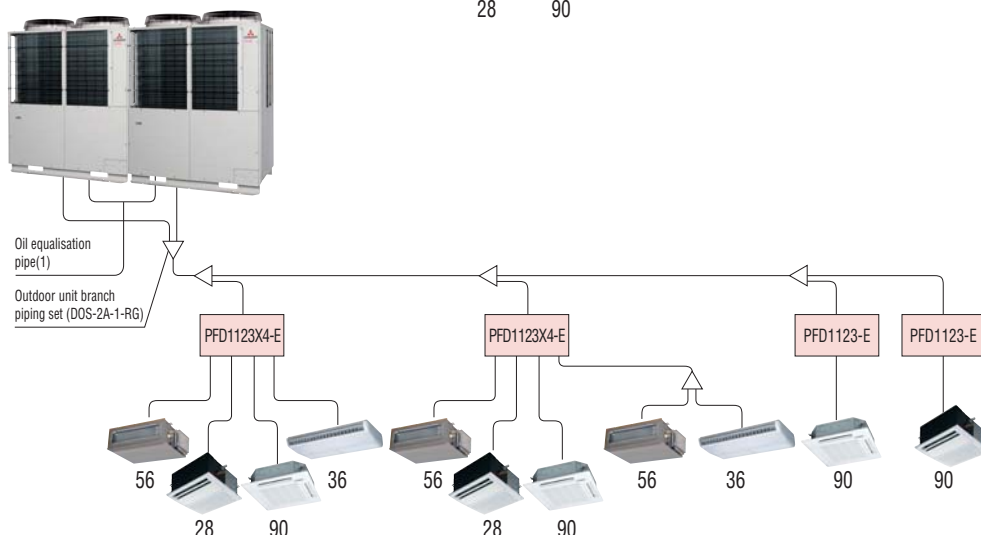

# Electrical wiring – power supply


The heat recovery systems include greatly simplified wiring requirements utilising a 'polarity-free' two wire control loop connecting the indoor units.

## Power wiring

Cables can be laid through the front, right, left or bottom of the outdoor unit casing.

Separate power supplies should be used for the outdoor unit (3phase) and the indoor units (1phase).

Only control wiring is connected from outdoor to indoor unit.

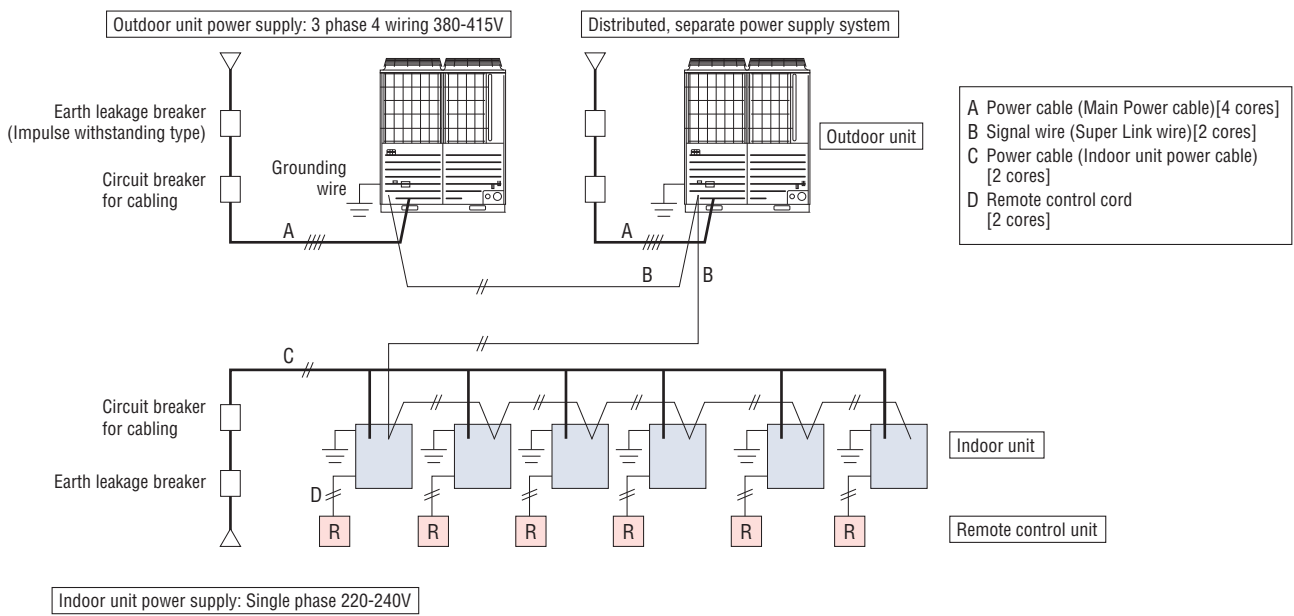

## CAUTION

If the earth leakage breaker is exclusively for ground fault protection, then you will need to install a circuit breaker for wiring work.



# Electrical wiring – control wiring

1. The control wiring is 5 Volt DC, non-polarised, two wire connection notated as 'A1' and 'B1'. This 'AB' wiring connects outdoor unit to indoor unit and indoor unit to indoor unit.

2. This wiring must be a 2-core shielded cable size 0.75mm<sup>2</sup> or 1.25mm<sup>2</sup>.


	0.75mm <sup>2</sup>	1.25mm <sup>2</sup>
~1000m	YES	YES
1000~1500m	YES	NO

3. We recommend the both ends of the shield of the cable are connected to ground (earth) at all the indoor units and outdoor units.


4. When plural outdoor units are used,  
 •Connect the signal cable between indoor and outdoor units and the signal cable between outdoor units belonging to the same refrigerant line to A1 and B1.  
 •Connect the signal line between outdoor units on different refrigerant lines to A2 and B2.

5. For current specification of 2-core (AB) wiring, please consult your MHI dealer.

(1) When one outdoor unit is used

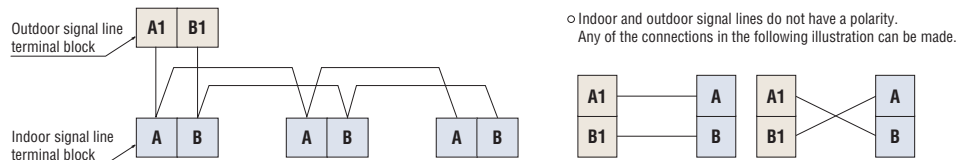


(2) When plural outdoor units are used

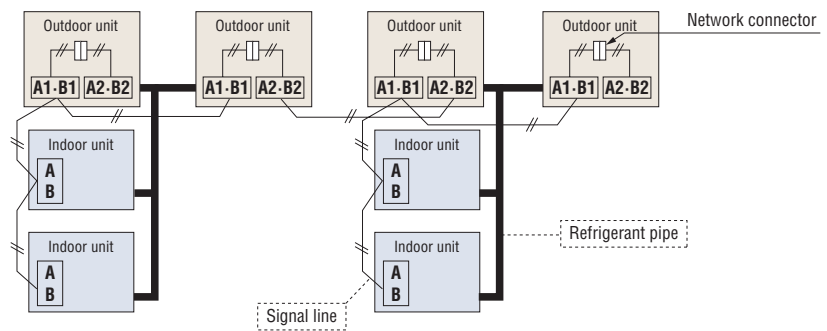


- (a) The maximum number of indoor units that can be connected in a system is 128 and it is possible to configure outdoor units and/or indoor units as an outdoor or indoor unit group connected with each other with two wires.
- (b) The signal wires can also be connected using the method shown below.

(3) The signal lines can also be connected using the method shown below.

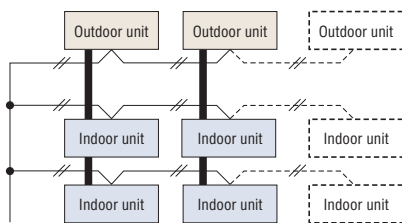

## Important


○ Loop wiring prohibited

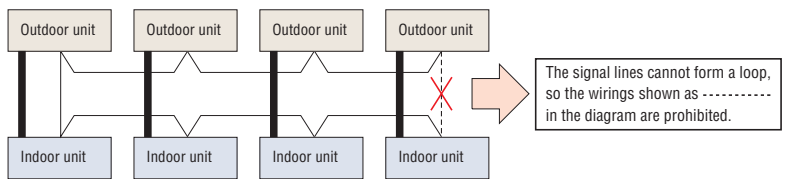

# Remote control wiring specifications

For interconnecting wiring between the remote control and indoor units (XY wiring) use 2-core cable size 0.3mm<sup>2</sup>. The maximum length of 2-core cable is 600 metres. Where the 2-core wiring exceeds 100m, use the wire size detailed on the table below.

Length (m)	Wire size
100 to 200	0.5mm <sup>2</sup> x 2 core
To 300	0.75mm <sup>2</sup> x 2 core
To 400	1.25mm <sup>2</sup> x 2 core
To 600	2.0mm <sup>2</sup> x 2 core

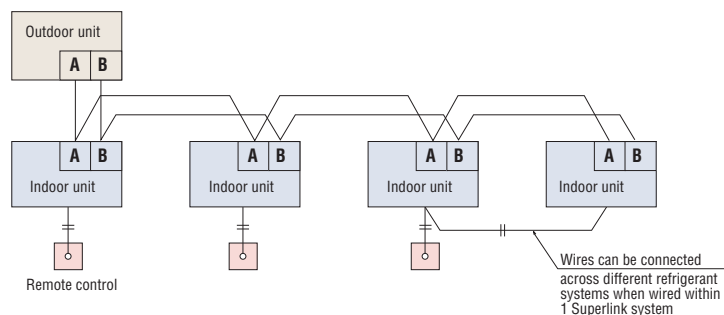



# Indoor units

## Ceiling Cassette -4way- FDT


### Model No.

FDT28KXE6F	FDT90KXE6F
FDT36KXE6F	FDT112KXE6F
FDT45KXE6F	FDT140KXE6F
FDT56KXE6F	FDT160KXE6F
FDT71KXE6F	



### Remote control (option)

Wired



Wireless




### Individual flap control system

According to room temperature conditions, four directions of air flow can be controlled by individual flap as preferred. Individual flap control is available even after installation.





Due to optimization of outlet design of air flow with our new advanced technology, sufficient air flow is secured and long reach of air flow is realized.



### The thinnest design



Thanks to new design of heat exchanger changed from 2 parts to 1 part, the height of indoor unit is reduced drastically. Furthermore applying DC fan motors to FDT models, the highest energy efficiency level, reduction of weight and significant compact design are realized.

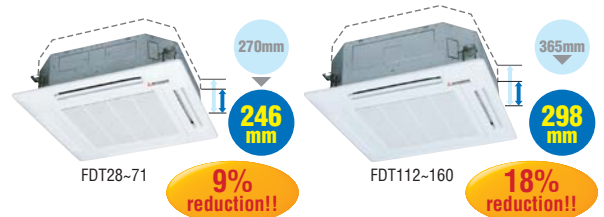

### Flap control system

Selection of flap position is possible. Individual flaps can be set at different angles.

\* RCH-E3 is not applicable to the individual flap control system and the flap control system.

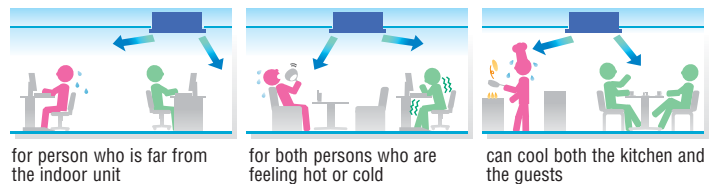

## Specifications

Item	Model	FDT28KXE6F	FDT36KXE6F	FDT45KXE6F	FDT56KXE6F	FDT71KXE6F	FDT90KXE6F	FDT112KXE6F	FDT140KXE6F	FDT160KXE6F	
Nominal cooling capacity	kW	2.8	3.6	4.5	5.6	7.1	9.0	11.2	14.0	16.0	
Nominal heating capacity	kW	3.2	4.0	5.0	6.3	8.0	10.0	12.5	16.0	18.0	
Power source		1 Phase 220-240V, 50Hz									
Power consumption	Cooling	0.03-0.03			0.04-0.04	0.08-0.08	0.15-0.15				
	Heating	0.03-0.03			0.04-0.04	0.08-0.08	0.15-0.15				
Sound power level	dB(A)	53			60	64	65	—	—	—	
Sound pressure level ※	dB(A)	Hi:33 Me:31 Lo:30					Hi:40 Me:37 Lo:35		Hi:42 Me:40 Lo:37		Hi:43 Me:41 Lo:38
Exterior dimensions H x W x D	mm	Unit:246x840x840 Panel:35x950x950					Unit:298x840x840 Panel:35x950x950				
Net weight	kg	Unit:22 Panel:5.5			Unit:24 Panel:5.5			Unit:27 Panel:5.5			
Air flow ※	m <sup>3</sup> /min	Hi:18 Me:16 Lo:14					Hi:27 Me:24 Lo:20		Hi:30 Me:27 Lo:23		
Outside air intake		Possible									
Panel		T-PSA-3BW-E									
Air filter, Q'ty		Pocket Plastic net x1 (Washable)									
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-T-36W-E									
Installation data		Liquid line:ø6.35(1/4")			Liquid line:ø6.35(1/4")			Liquid line:ø9.52(3/8")			
Refrigerant piping size	mm(in)	Gas line:ø9.52(3/8")			Gas line:ø12.7(1/2")			Gas line:ø15.88(5/8")			


1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.  
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

※ Powerful-Hi can be selected. Sound pressure level: FDT28/36/45 37dB(A), FDT56 39dB(A), FDT71 46dB(A), FDT90/112/140/160 51dB(A). Air flow: FDT28/36/45/56 20m<sup>3</sup>/min, FDT71 28m<sup>3</sup>/min, FDT90/112/140/160 37m<sup>3</sup>/min.


# Dimensions

All measurements in mm.

FDT28KXE6F, 36KXE6F, 45KXE6F, 56KXE6F, 71KXE6F

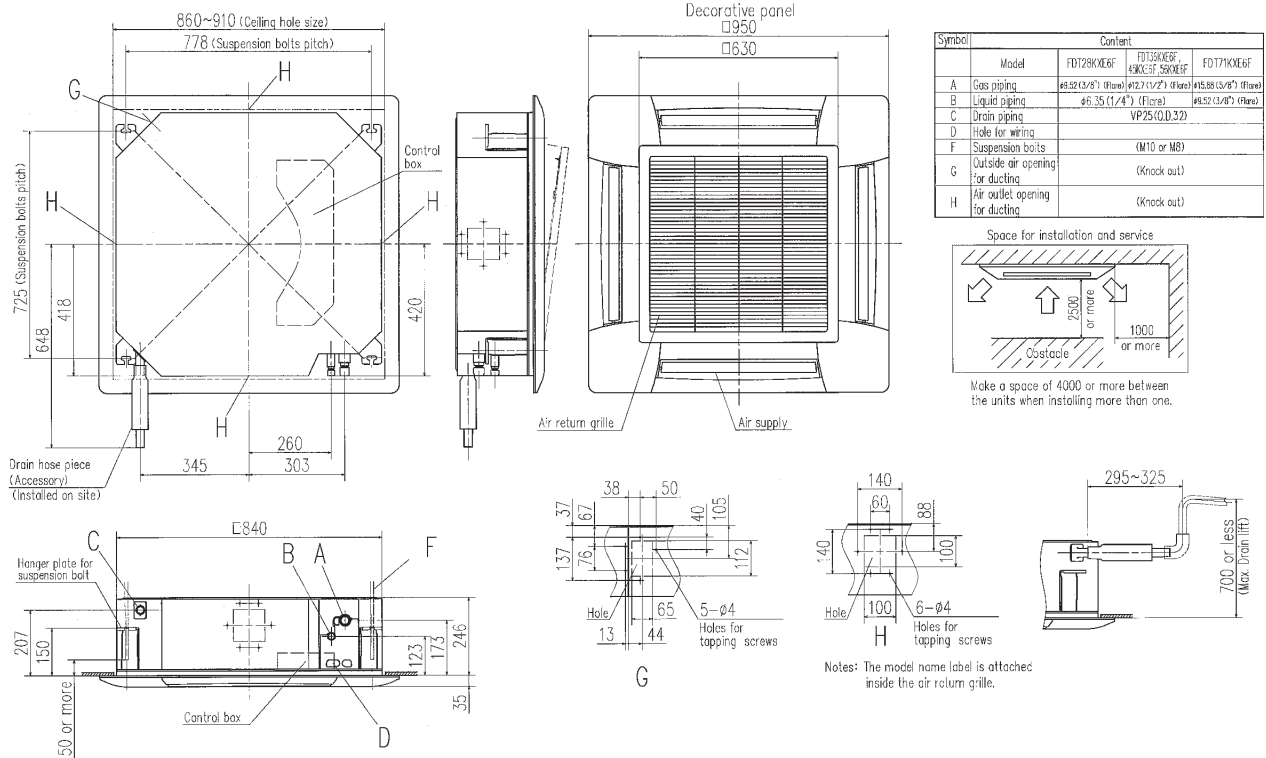

FDT90KXE6F, 112KXE6F, 140KXE6F, 160KXE6F

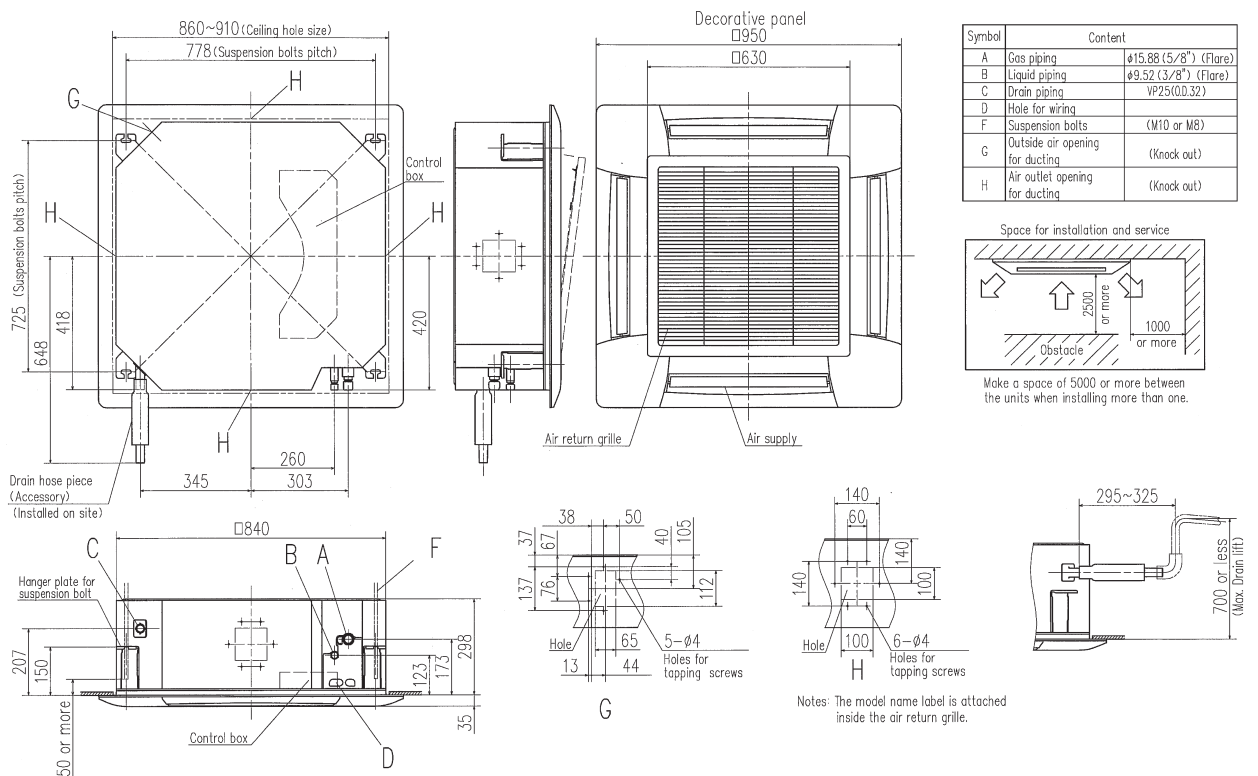



# Ceiling Cassette -4way Compact (600x600mm)- FDTC

Fits into standard  
600 x 600 ceiling

## Model No.

- FDTC15KXE6F
- FDTC22KXE6F
- FDTC28KXE6F
- FDTC36KXE6F
- FDTC45KXE6F
- FDTC56KXE6F




## Remote control (option)

Wired



Wireless



RC-EX1A

RC-E5

RCH-E3


RCN-TC-24W-ER

## Taking OA (Outside Air) into inside

**OA Spacer TC-OAS-E (option)**  
**Joint Duct TC-OAD-E (option)**


Utilizing OA spacer which comes as optional equipment, outside air can be taken inside.

- Using 1 joint duct:  
OA up to 1.3m<sup>3</sup>/min.
- Using 2 joint ducts:  
OA from 1.3 to 2.6m<sup>3</sup>/min.

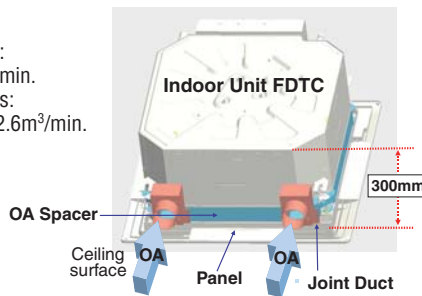

## Quiet operation (Sound pressure level in the Lo mode.)

The industry's lowest sound pressure level:25dB(A) of FDTC15KXE6F was achieved by Optimizing fan speed and distributor size.

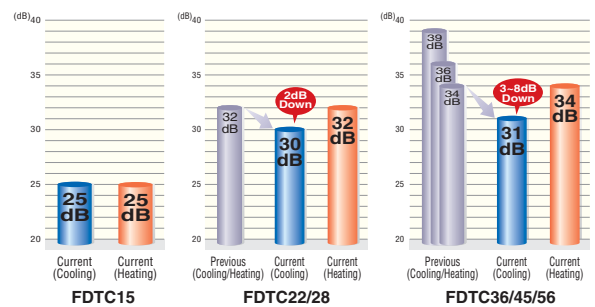

## Individual flap control system


According to room temperature conditions, four directions of air flow can be controlled by individual flap as preferred. Individual flap control is available even after installation.



## Flap control system

Selection of flap position is possible. Individual flaps can be set at different angles.

\* RCH-E3 is not applicable to the Individual flap control system and the flap control system.



# Specifications

Item	Model	FDTC15KXE6F	FDTC22KXE6F	FDTC28KXE6F	FDTC36KXE6F	FDTC45KXE6F	FDTC56KXE6F	
Nominal cooling capacity	kW	1.5	2.2	2.8	3.6	4.5	5.6	
Nominal heating capacity	kW	1.7	2.5	3.2	4.0	5.0	6.3	
Power source		1 Phase 220-240V, 50Hz						
Power consumption	Cooling	0.02-0.02		0.03-0.03		0.05-0.05		
	Heating	0.02-0.02		0.03-0.03		0.05-0.05		
Sound power level	dB(A)	56			58		60	
Sound pressure level *	Cooling	Hi:32 Me:28 Lo:25		Hi:35 Me:33 Lo:30		Hi:40 Me:37 Lo:31	Hi:45 Me:39 Lo:31	
	Heating	Hi:32 Me:28 Lo:25		Hi:35 Me:33 Lo:32		Hi:40 Me:37 Lo:34	Hi:45 Me:39 Lo:34	
Exterior dimensions	mm	Unit:248x570x570 Panel:35x700x700						
Net weight	kg	Unit:14 Panel:3.5			Unit:15 Panel:3.5			
Air flow *	Cooling	Hi:7 Me:5.5 Lo:4.5		Hi:9.5 Me:8.5 Lo:7		Hi:11 Me:9 Lo:7	Hi:13 Me:10 Lo:7	
	Heating	Hi:7 Me:5.5 Lo:4.5		Hi:9.5 Me:8.5 Lo:8		Hi:11 Me:9 Lo:8	Hi:13 Me:10 Lo:8	
Outside air intake		Possible with OA Spacer TC-OAS-E & Joint Duct TC-OAD-E						
Panel		TC-PSA-25W-E						
Air filter, Q'ty		Pocket Plastic net x1 (Washable)						
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-TC-24W-ER						
Installation data	mm(m)	Liquid line:ø6.35(1/4")			Liquid line:ø6.35(1/4")			
	Refrigerant piping size	Gas line:ø9.52(3/8")			Gas line:ø12.7(1/2")			




1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.





\* Powerful-Hi can be selected. Sound pressure level: FDTC15 34dB(A), FDTC22/28 44dB(A), FDTC36 46dB(A), FDTC45 48dB(A), FDTC56 49dB(A). Air flow: FDTC15 8m<sup>3</sup>/min, FDTC22/28 12m<sup>3</sup>/min, FDTC36 13m<sup>3</sup>/min, FDTC45 15m<sup>3</sup>/min, FDTC56 16m<sup>3</sup>/min.

# Dimensions

All measurements in mm.

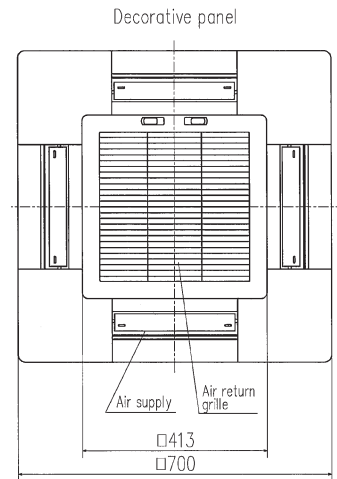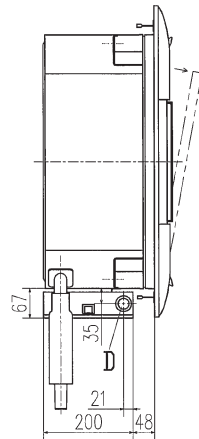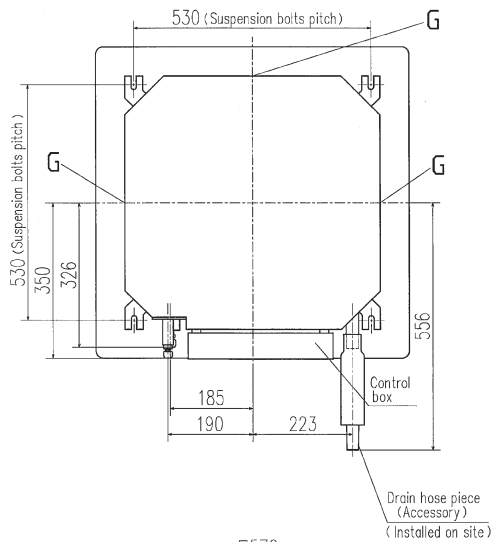


Notes (1) The model name label is attached on the control box lid.  
 (2) This unit is designed for 2x2 grid ceiling.  
 If it is installed on a ceiling other than 2x2 grid ceiling, provide an inspection part on the control box side.

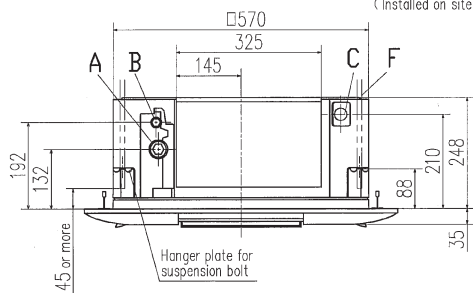


Make a space of 4000 or more between the units when installing more than one.

Symbol	Model	Content	
		FDT013KXE6F, 22KXE6F, 28KXE6F	FDT036KXE6F, 45KXE6F, 56KXE6F
A	Gas piping	ø9.52 (3/8") (Flare)	ø12.7 (1/2") (Flare)
B	Liquid piping	ø6.35 (1/4") (Flare)	
C	Drain piping	1P21/0 D.32	
D	Hole for wiring	ø25	
F	Suspension bolts	(M10 or M8)	
G	Air outlet opening for ducting	(Knock out)	

Ultra slim design at just 248mm above the ceiling

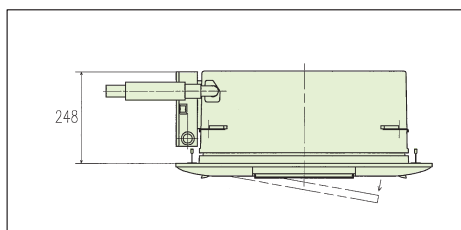

Condensate drain pump included as standard

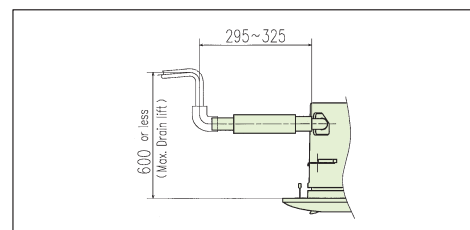





# Ceiling Cassette -2way- FDTW

## Model No.

FDTW28KXE6F	FDTW90KXE6F
FDTW45KXE6F	FDTW112KXE6F
FDTW56KXE6F	FDTW140KXE6F
FDTW71KXE6F	



## Remote control (option)

Wired



RC-EX1A RC-E5 RCH-E3


Wireless



RCN-TW-E


### Individual flap control system

According to room temperature conditions, four directions air flow can be controlled individually by flap control system. Due to optimization of outlet design of air flow our new advanced technology, sufficient air flow is secured and long reach of air flow is achieved.

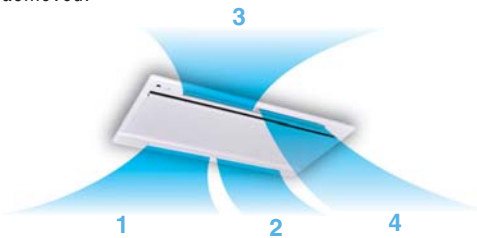

### Flap control system

The flap can swing within the range of upper and lower flap position selected with wired remote control.



\*Wireless remote control and RCH-E3 is not applicable to the individual flap control system and the flap control system.

### Installation workability


#### Drainage spout

Drainage flow test can be done easily by use of this drainage spout.




#### Transparent access hole to drain pan

Dirt condition of the bottom of a drain pan can be checked through this transparent access hole without removing drain pan.

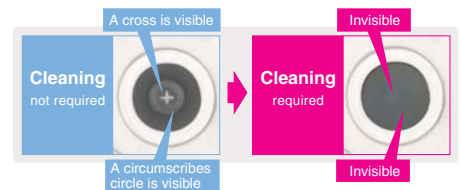

### 750mm Drain Pump

Drain can be discharged upward by 750mm from the ceiling surface close to the indoor unit. It allows a piping layout with a high degree of freedom depending on the installation location.

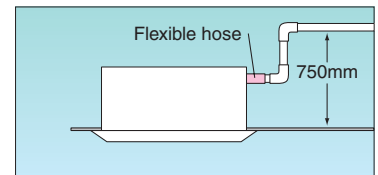

## Specifications

Item	Model	FDTW28KXE6F	FDTW45KXE6F	FDTW56KXE6F	FDTW71KXE6F	FDTW90KXE6F	FDTW112KXE6F	FDTW140KXE6F	
Nominal cooling capacity	kW	2.8	4.5	5.6	7.1	9.0	11.2	14.0	
Nominal heating capacity	kW	3.2	5.0	6.3	8.0	10.0	12.5	16.0	
Power source		1 Phase 220-240V, 50Hz							
Power consumption	Cooling	0.09-0.09	0.10-0.10	0.14-0.14	0.14-0.14	0.19-0.19	0.19-0.19	0.19-0.19	
	Heating	0.09-0.09	0.10-0.10	0.14-0.14	0.14-0.14	0.19-0.19	0.19-0.19	0.19-0.19	
Sound power level	dB(A)	58					65	—	
Sound pressure level ※	dB(A)	Hi:38 Me:34 Lo:31					Hi:45 Me:41 Lo:37		
Exterior dimensions H x W x D	mm	Unit:325x820x620 Panel:20x1120x680				Unit:325x1535x620 Panel:20x1835x680			
Net weight	kg	Unit:20 Panel:8.5	Unit:21 Panel:8.5	Unit:23 Panel:8.5	Unit:23 Panel:8.5	Unit:35 Panel:13	Unit:35 Panel:13		
Air flow ※	m <sup>3</sup> /min	Hi:12 Me:10 Lo:9				Hi:27 Me:23 Lo:20			
Outside air intake		Possible							
Panel		TW-PSA-26W-E				TW-PSA-46W-E			
Air filter, Q'ty		Pocket Plastic net x2 (Washable)				Pocket Plastic net x3 (Washable)			
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-TW-E							
Installation data		Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")		Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")		Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")			



1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.  
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

※ Powerful-Hi can be selected. Sound pressure level: FDTW28/45/56/71 42dB(A), FDTW90/112/140 48dB(A). Air flow: FDTW28/45/56/71 14.5m<sup>3</sup>/min, FDTW90/112/140 31m<sup>3</sup>/min.

# Dimensions


All measurements in mm.

## FDTW28KXE6F, 45KXE6F, 56KXE6F, 71KXE6F

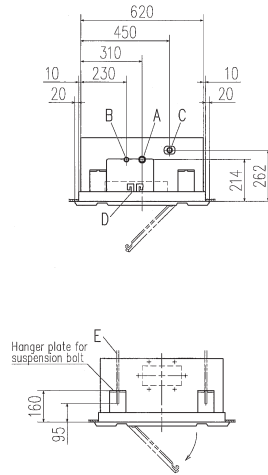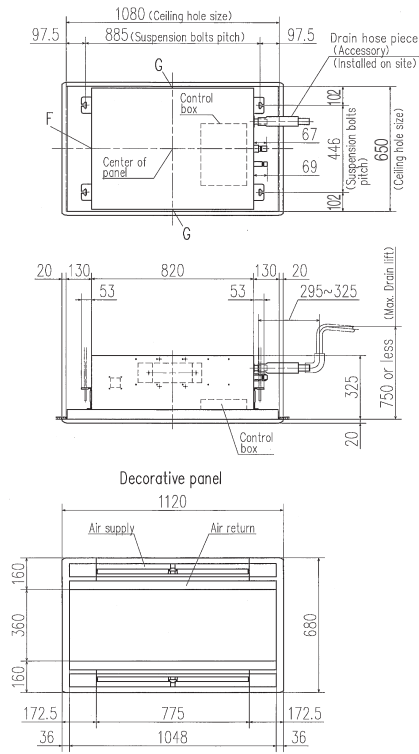



Symbol	Model	28	45,56	71
A	Gas piping	φ9.52 (3/8") (Flare)	φ12.1 (1/2") (Flare)	φ15.88 (5/8") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)	φ9.52 (3/8") (Flare)	φ12.1 (1/2") (Flare)
C	Drain piping	VP25 (O.D. 32)		
D	Hole for wiring			
E	Suspension bolts	(M10)		
F	Outside air opening for ducting	(Knock out)		
G	Air outlet opening for ducting	(Knock out)		

Notes (1) The model name label is attached on the lid of the control box.




Make a space of 4000 or more between the units when installing more than one.

## FDTW90KXE6F, 112KXE6F, 140KXE6F

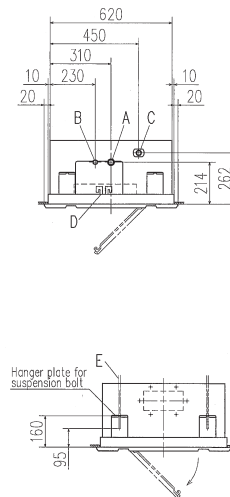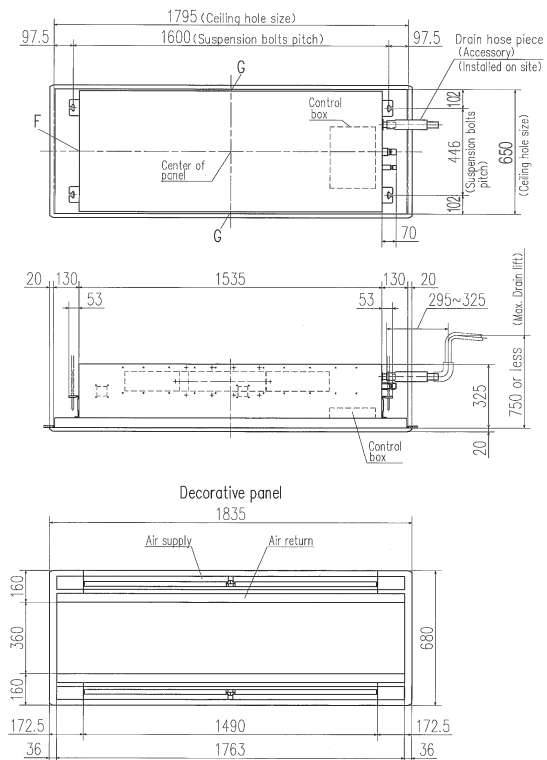

Symbol	Content
A	Gas piping
B	Liquid piping
C	Drain piping
D	Hole for wiring
E	Suspension bolts
F	Outside air opening for ducting
G	Air outlet opening for ducting

Notes (1) The model name label is attached on the lid of the control box.



Make a space of 5000 or more between the units when installing more than one.




# Ceiling Cassette -1way- FDTS

**Model No.**  
FDTS45KXE6F  
FDTS71KXE6F



## Remote control (option)

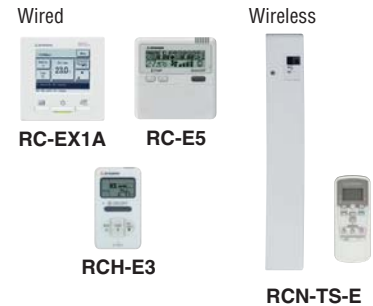


### Individual flap control system

Two directions of air flow can be controlled individually by flap control system.



### Flap control system


The flap can swing within the range of upper and lower flap position selected with wired remote control.



\*Wireless remote control and RCH-E3 is not applicable to the individual flap control system and the flap control system.


### Compact design

Indoor unit size (W:1,150 x D:565) brings easy installation for 1,200 x 600 ceiling and Panel size (1,250 x 650) is suitable for 1,200 x 600 ceiling. Height is the industry's lowest height level 220mm and weight is 27/28kg only.



### 600mm Drain Pump

Drain can be discharged upward by 600mm from the ceiling surface close to the indoor unit. It allows a piping layout with a high degree of freedom depending on the installation location.



### Wireless remote control

For wireless remote control simply attach an additional panel with infrared receiver on the right side of the main decorative panel.



## Specifications






Item	Model	FDTS45KXE6F	FDTS71KXE6F
Nominal cooling capacity	kW	4.5	7.1
Nominal heating capacity	kW	5.0	8.0
Power source		1 Phase 220-240V, 50Hz	
Power consumption	Cooling kW	0.04-0.04	0.09-0.09
	Heating kW	0.04-0.04	0.09-0.09
Sound power level	dB(A)	60	61
Sound pressure level ※	dB(A)	Hi:40 Me:38 Lo:35	Hi:46 Me:41 Lo:36
Exterior dimensions H x W x D	mm	Unit:220x1150x565 Panel:35x1250x650	
Net weight	kg	Unit:27 Panel:5	Unit:28 Panel:5
Air flow ※	m <sup>3</sup> /min	Hi:12 Me:11 Lo:9.5	Hi:15 Me:12 Lo:9.5
Outside air intake		Possible	
Panel		TS-PSA-3AW-E	
Air filter, Q'ty		Pocket Plastic net x2 (Washable)	
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-TS-E	
Installation data		Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")	Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")
Refrigerant piping size	mm(in)		

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.  
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

※ Powerful-Hi can be selected. Sound pressure level: FDTS45 42dB(A), FDTS71 49dB(A). Air flow: FDTS45 13m<sup>3</sup>/min, FDTS71 17m<sup>3</sup>/min.

# Dimensions

All measurements in mm.

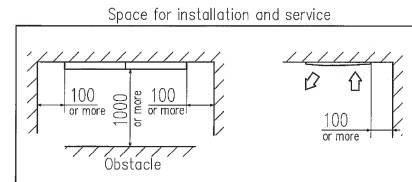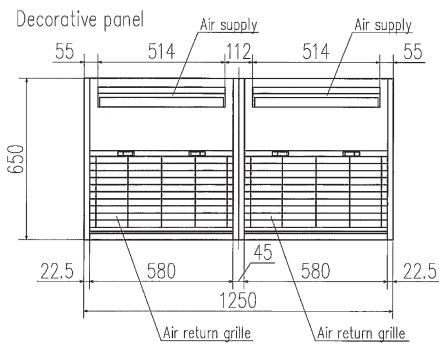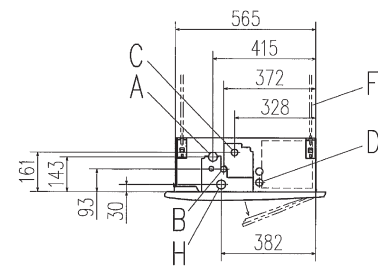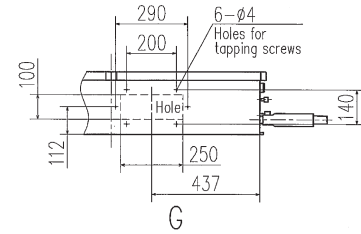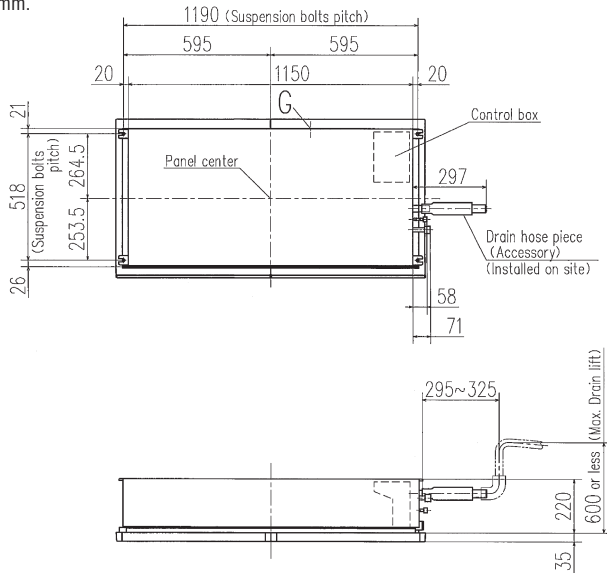

Make a space of 4000 or more between the units when installing more than one.

Symbol	Content		
	Model	45	71
A	Gas piping	φ12.7 (1/2") (Flare)	φ15.88 (5/8") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)	φ9.52 (3/8") (Flare)
C	Drain piping	VP25 (I.D.25, O.D.32) Note (2)	
D	Hole for wiring		
F	Suspension bolts	(M10)	
G	Outside air opening for ducting	(Knock out)	
H	Drain piping (Gravity drainage)	VP25 (I.D.25, O.D.32)	



# Ceiling Cassette -1way Compact-FDTQ

**Model No.**  
 FDTQ22KXE6F  
 FDTQ28KXE6F  
 FDTQ36KXE6F



Fits into standard  
600 x 600 ceiling

## Remote control (option)

Wired



**RC-EX1A RC-E5 RCH-E3**

Wireless




**RCN-KIT3-E**

### Compact design


- Comfortable effective cooling for small rooms, with low fan speed air flow at just 5.4m<sup>3</sup>/min.



Optional wide panel shown for solid ceiling



Condensate drain pump included as standard

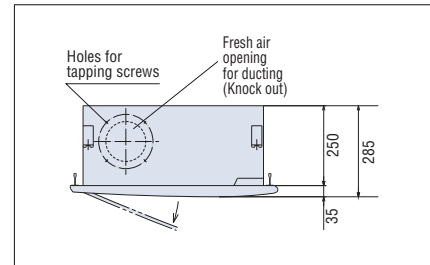

Ultra slim design at just 250mm above the ceiling

## Specifications

Item	Model	FDTQ22KXE6F				FDTQ28KXE6F				FDTQ36KXE6F			
Panel Name		Direct blow panel		Duct panel		Direct blow panel		Duct panel		Direct blow panel		Duct panel	
Panel mode (Option)		TQ-PSA-15W-E	TQ-PSB-15W-E	QR-PNA-14W-ER	QR-PNB-14W-ER	TQ-PSA-15W-E	TQ-PSB-15W-E	QR-PNA-14W-ER	QR-PNB-14W-ER	TQ-PSA-15W-E	TQ-PSB-15W-E	QR-PNA-14W-ER	QR-PNB-14W-ER
Nominal cooling capacity	kW	2.2				2.8				3.6			
Nominal heating capacity	kW	2.5				3.2				4.0			
Power source		1 Phase 220-240V, 50Hz											
Power consumption	Cooling	0.05-0.07				0.05-0.07				0.05-0.07			
	Heating	0.05-0.07				0.05-0.07				0.05-0.07			
Sound power level	dB(A)	60											
Sound pressure level ※	dB(A)	Hi:41 Me:38 Lo:33		Hi:41 Me:38 Lo:33		Hi:41 Me:38 Lo:33		Hi:41 Me:38 Lo:33		Hi:41 Me:38 Lo:33		Hi:41 Me:38 Lo:33	
Exterior dimensions	Unit	250x570x570											
	Panel	mm	35x625x650	35x780x650	35x625x650	35x780x650	35x625x650	35x780x650	35x625x650	35x780x650	35x625x650	35x780x650	35x625x650
Net weight	kg	Unit:23 Panel:2.5	Unit:23 Panel:3	Unit:23 Panel:2.5	Unit:23 Panel:3	Unit:23 Panel:2.5	Unit:23 Panel:3	Unit:23 Panel:2.5	Unit:23 Panel:3	Unit:23 Panel:2.5	Unit:23 Panel:3	Unit:23 Panel:2.5	Unit:23 Panel:3
Air flow ※	m <sup>3</sup> /min	Hi:7 Me:6 Lo:5		Hi:7 Me:6 Lo:5		Hi:7 Me:6 Lo:5		Hi:7 Me:6 Lo:5		Hi:7 Me:6 Lo:5		Hi:7 Me:6 Lo:5	
Outside air intake		Possible											
Air filter, Q'ty		Pocket Plastic net x1 (Washable)											
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E											
Installation data	Refrigerant piping size	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")											
		Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")											

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.  
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.


※ Powerful-Hi can be selected. Sound pressure level: FDTQ22/38/36 45dB(A). Air flow: FDTQ22/38/36 8m<sup>3</sup>/min.




# Dimensions

All measurements in mm.

Direct blow panel (TQ-PSA-15W-E)




Direct blow panel (TQ-PSB-15W-E)






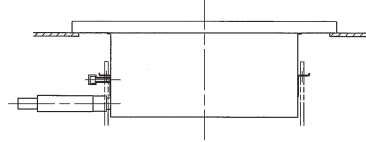


Symbol	Model	Content
		FDTQ22KXE6F, 28KXE6F FDTQ36KXE6F
A	Gas piping	ø9.52 (3/8") (Flare) ø12.7 (1/2") (Flare)
B	Liquid piping	ø6.35 (1/4") (Flare)
C	Drain piping	VP25 (O.D.32)
D	Hole for wiring	ø30
E	Suspension bolts	M10
F 1,2	Outside air opening for ducting	(Knock out)

Duct panel (QR-PNA-14W-ER)

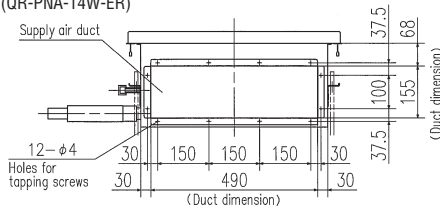

Duct panel (QR-PNB-14W-ER)

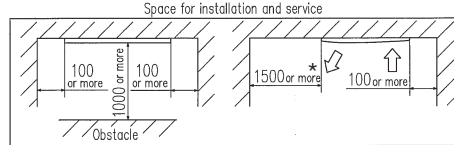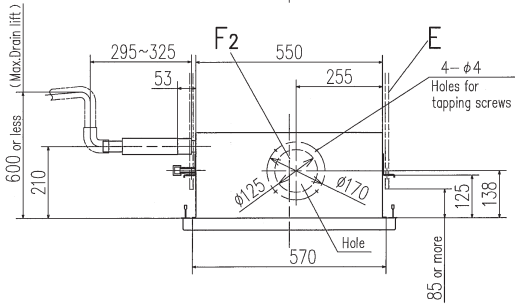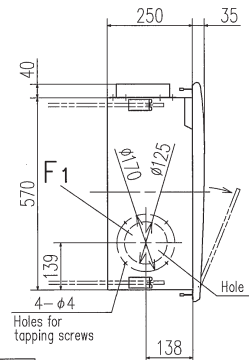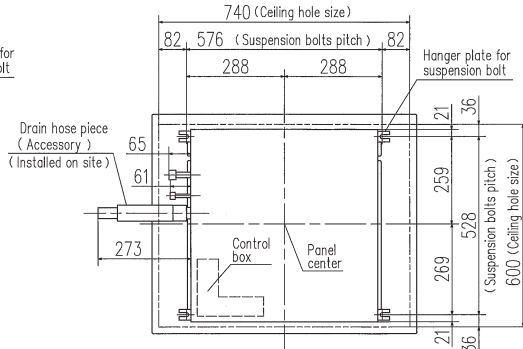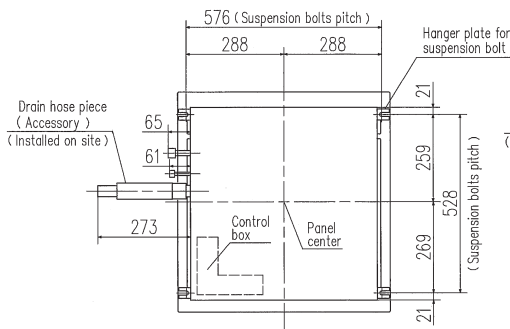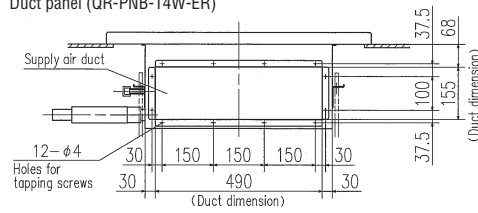


Make a space of 3000 or more between the units when installing more than one.

Notes



- (1) The model name label is attached on the fan case inside the air return grille.
- (2) Prepare the connecting socket (VP20) on site.
- (3) This unit is designed for 2X2 grid ceiling.

\* In case of Direct blow panel

Decorative panel

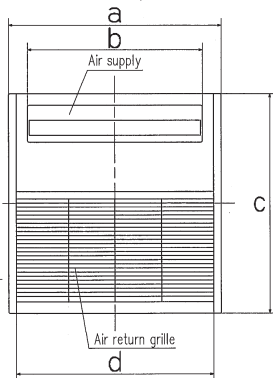

Decorative panel

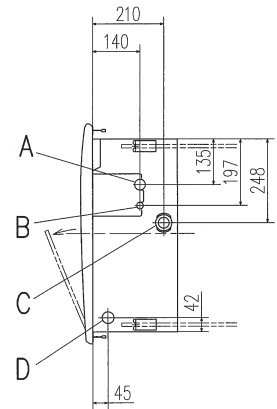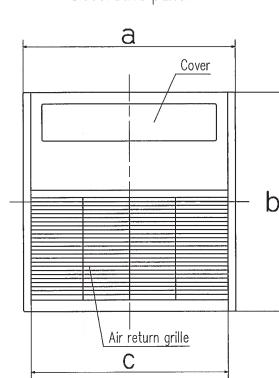

Dimension Table

Unit:mm

model	a	b	c	d
TQ-PSA-15W-E	625	514	650	580
TQ-PSB-15W-E	780	514	650	580

Dimension Table

Unit:mm

model	a	b	c
QR-PNA-14W-ER	625	650	580
QR-PNB-14W-ER	780	650	580

# Duct Connected -High Static Pressure- FDU

- Model No.**  
 FDU45KXE6F  
 FDU56KXE6F  
 FDU71KXE6F  
 FDU90KXE6F  
 FDU112KXE6F  
 FDU140KXE6F  
 FDU160KXE6F




## Remote control (option)




### External Static Pressure(E.S.P.) control

You can set External Static Pressure (E.S.P.) by method of manual setting on remote control. Indoor unit will control fan-speed to keep rated air flow volume at each fan speed setting. You can set required E.S.P. by wired remote control that calculated with the set air flow rate and pressure loss of the duct connected.



**E.S.P. button**

External Static Pressure (E.S.P.) can be set by E.S.P. button.

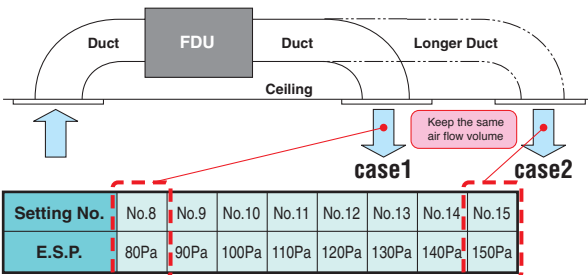

\*Range of 80~150 Pa is set at ex-factory default.  
 Range of 10~200 Pa is available by setting SW8-4 switch on at site.

### <Expansion of external static pressure range>

Previous **10~130Pa** → **10~200Pa** Current

### Thin design




	Previous	Current	
FDU71KXE6F	297	→ 280	17mm less!!
FDU112/140KXE6F	350	→ 280	70mm less!!

### Reduction of weight

	Previous	Current	
FDU71KXE6F	40	→ 34	6kg less!!
FDU90KXE6F	63	→ 34	29kg less!!
FDU112/140KXE6F	63	→ 54	9kg less!!

### Reduction of sound pressure level

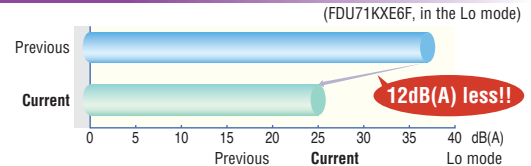

	Previous	Current	
FDU90KXE6F	37	→ 25	12dB(A) less!!
FDU112KXE6F	38	→ 30	8dB(A) less!!
FDU140KXE6F	39	→ 29	10dB(A) less!!

### Transparent inspection window

Dirt condition of the bottom of a drain pan can be checked through this transparent inspection window without removing drain pan. (Please refer to P60)

## Specifications




Item	Model	FDU45KXE6F	FDU56KXE6F	FDU71KXE6F	FDU90KXE6F	FDU112KXE6F	FDU140KXE6F	FDU160KXE6F	
Nominal cooling capacity	kW	4.5	5.6	7.1	9.0	11.2	14.0	16.0	
Nominal heating capacity	kW	5.0	6.3	8.0	10.0	12.5	16.0	18.0	
Power source		1 Phase 220-240V, 50Hz							
Power consumption	Cooling	0.10-0.10			0.24-0.25	0.31-0.32	0.35-0.36	0.42-0.43	
	Heating	0.10-0.10			0.24-0.25	0.31-0.32	0.35-0.36	0.42-0.43	
Sound power level	dB(A)	60			65	—			
Sound pressure level ※	dB(A)	Hi:32 Me:29 Lo:26			Hi:33 Me:29 Lo:25	Hi:38 Me:36 Lo:30	Hi:40 Me:34 Lo:29	Hi:40 Me:35 Lo:30	
Exterior dimensions H x W x D	mm	280x750x635			280x950x635	280x1370x740			
Net weight	kg	29			34	54			
Air flow ※	m³/min	Hi:10 Me:9 Lo:8			Hi:19 Me:15 Lo:10	Hi:28 Me:25 Lo:19	Hi:32 Me:26 Lo:20	Hi:35 Me:28 Lo:22	
Maximum external static pressure	Pa	200							
Outside air intake		Possible							
Air filter		Procure locally							
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E							
Installation data Refrigerant piping size	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")				Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")			

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. External static pressure of indoor unit is 60Pa.  
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.  
 ※ Powerful-Hi can be selected. Sound pressure level: FDU45/56 37dB(A), FDU71/90 38dB(A), FDU112 44dB(A), FDU140 45dB(A), FDU160 47dB(A). Air flow: FDU45/56 13m³/min, FDU71/90 24m³/min, FDU112 36m³/min, FDU140 39m³/min, FDU160 48m³/min.



# Dimensions

All measurements in mm.

## FDU45KXE6F, 56KXE6F

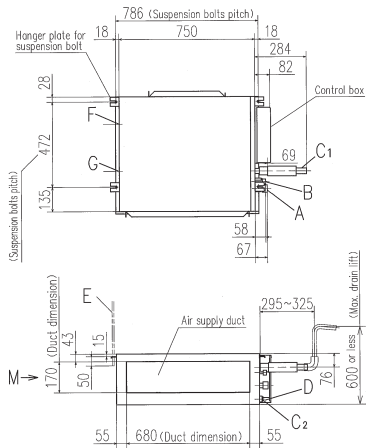




Space for installation and service  
Select either of two cases to keep space for installation and services.





Notes: The model name label is attached on the lid of the control box.

Symbol	Content
A	Gas piping $\phi 12.7$ (1/2") (Flare)
B	Liquid piping $\phi 6.35$ (1/4") (Flare)
C1	Drain piping VP25 (O.D.32)
C2	Drain piping (Gravity drainage) VP20
D	Hole for wiring (M10)
F	Outside air opening for ducting (Knock out)
G	Air outlet opening for ducting (Knock out)
H	Inspection hole (450X450)

## FDU71KXE6F, 90KXE6F

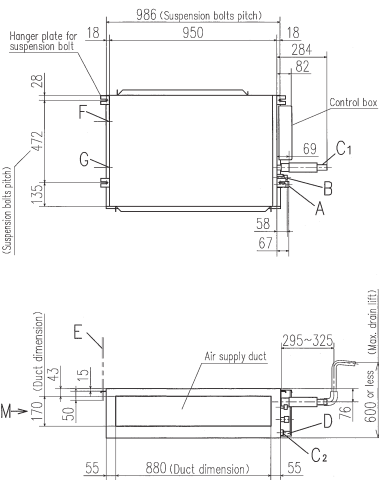




Space for installation and service  
Select either of two cases to keep space for installation and services.





Notes: The model name label is attached on the lid of the control box.

Symbol	Content
A	Gas piping $\phi 15.88$ (5/8") (Flare)
B	Liquid piping $\phi 9.52$ (3/8") (Flare)
C1	Drain piping VP25 (O.D.32)
C2	Drain piping (Gravity drainage) VP20
D	Hole for wiring (M10)
F	Outside air opening for ducting (Knock out)
G	Air outlet opening for ducting (Knock out)
H	Inspection hole (450X450)

## FDU112KXE6F, 140KXE6F, 160KXE6F

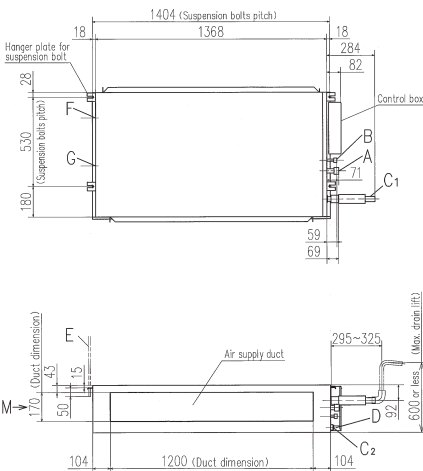

Space for installation and service  
Select either of two cases to keep space for installation and services.



Notes: The model name label is attached on the lid of the control box.

Symbol	Content
A	Gas piping $\phi 15.88$ (5/8") (Flare)
B	Liquid piping $\phi 9.52$ (3/8") (Flare)
C1	Drain piping VP25 (O.D.32)
C2	Drain piping (Gravity drainage) VP20
D	Hole for wiring (M10)
F	Outside air opening for ducting (Knock out)
G	Air outlet opening for ducting (Knock out)
H	Inspection hole (450X450)

# Duct Connected -High Static Pressure- FDU

**Model No.**  
FDU224KXZE1  
FDU280KXZE1

**NEW**



## Remote control (option)

Wired



Wireless



RCN-KIT3-E

## External Static Pressure(E.S.P) control

You can set External Static Pressure (E.S.P.) by method of manual setting on remote control. Indoor unit will control fan-speed to keep rated air flow volume at each fan speed setting. You can set required E.S.P. by wired remote control that calculated with the set air flow rate and pressure loss of the duct connected.



RC-E5

**E.S.P. button**



External Static Pressure (E.S.P.) can be set by E.S.P. button.

## Quiet operation:45dB(A)

Thanks to use of DC fan motor, fan steps increase from two to four and quiet operation is achieved. (Sound pressure level 45dB(A) in the Lo mode).

## Improvement of the serviceability

Fan unit (impeller and motor) can be pulled out from the right side of the unit. Maintenance can be available from the right side or the bottom side. (Common for FDUM22~160KXE6F & FDU45~160KXE6F)

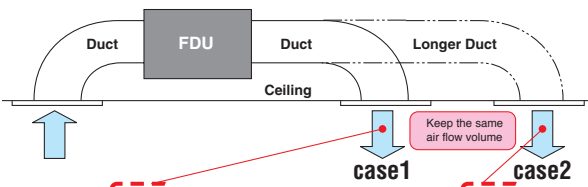

Setting No.	No.8	No.9	No.10	No.11	No.12	No.13	No.14	No.15
E.S.P.	80Pa	90Pa	100Pa	110Pa	120Pa	130Pa	140Pa	150Pa

\*Range of 80~150 Pa is set at ex-factory default.

Range of 10~200 Pa is available by setting SW8-4 switch on at site.

## Specifications

Item	Model	FDU224KXZE1	FDU280KXZE1
Nominal cooling capacity	kW	22.4	28.0
Nominal heating capacity	kW	25.0	31.5
Power source		1 Phase 220-240V, 50Hz	
Power consumption	Cooling	1.16-1.20	1.16-1.20
	Heating	1.16-1.20	1.16-1.20
Sound power level	dB(A)	—	
Sound pressure level	dB(A)	Hi:50 / Me:47 / Lo:45	
Exterior dimensions H x W x D	mm	379x1600x893	
Net weight	kg	89	
Air flow ※	m <sup>3</sup> /min	Hi:72 / Me:64 / Lo:56	
Maximum external static pressure	Pa	200	
Outside air intake		Possible(on return duct)	
Air filter		Procure locally	
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E	
Installation data	Refrigerant piping size	Liquid line:ø9.52(3/8") Gas line:ø19.05(3/4")	Liquid line:ø9.52(3/8") Gas line:ø22.22(7/8")


1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. External static pressure of indoor unit is 72Pa.

2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.




※ Powerful-Hi can be selected. Sound pressure level: FDU224/280 52dB(A). Air flow: FDU224/280 80m<sup>3</sup>/min.

# Dimensions

All measurements in mm.

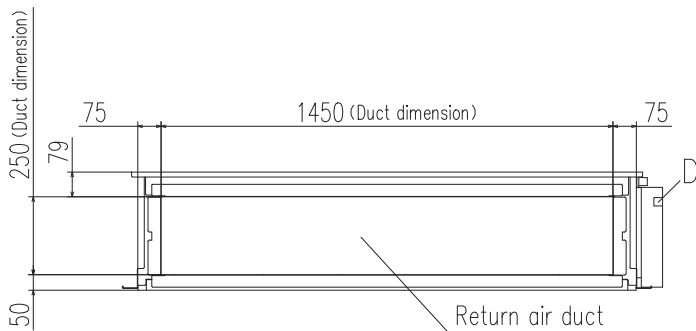


Symbol	Content		
	MODEL	224	280
A	Gas piping	φ19.05 (3/4") (Brazing)	φ22.22 (7/8") (Brazing)
B	Liquid piping	φ9.52 (3/8") (Brazing)	
C	Drain piping (Gravity drainage)	VP25 (O.D.32)	
D	Hole for wiring		
E	Suspension bolts	M10	
F	Inspection hole	(450X450)	

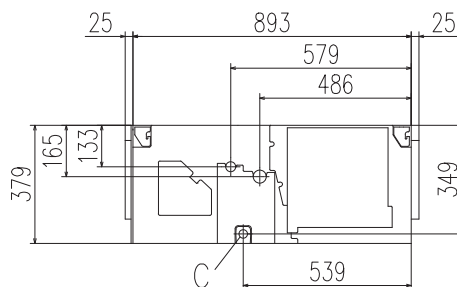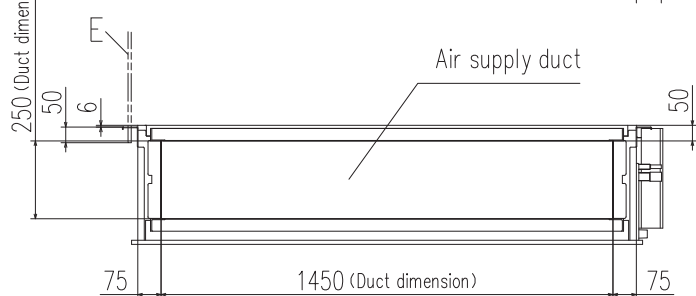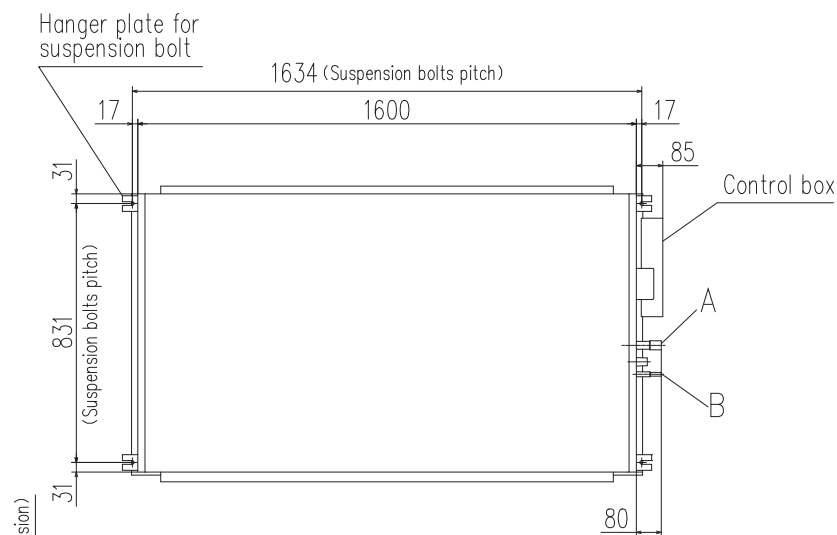


### Space for installation and service

Select either of two cases to keep space for installation and services.

(Case 1) From side of unit

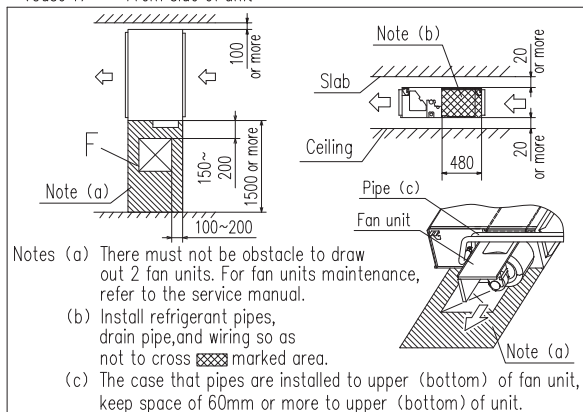

(Case 2) From bottom of unit



Notes (1) The model name label is attached on the lid of the control box.





# Duct Connected -Low/Middle Static Pressure- FDUM

## Model No.

FDUM22KXE6F	FDUM71KXE6F
FDUM28KXE6F	FDUM90KXE6F
FDUM36KXE6F	FDUM112KXE6F
FDUM45KXE6F	FDUM140KXE6F
FDUM56KXE6F	FDUM160KXE6F



## Filter kit (option)

- UM-FL1EF : for 22~56
- UM-FL2EF : for 71, 90
- UM-FL3EF : for 112, 140, 160



\* Filter pressure loss:5pa

## Remote control (option)

Wired



RC-EX1A RC-E5 RCH-E3


Wireless



RCN-KIT3-E

### Automatic external static pressure (E.S.P.) control

Duct design was simplified.  
Using DC motor, the most optimum air flow volume can be achieved by this automatic control.  
Indoor unit will recognize external static pressure by itself automatically and keep rated air flow volume.

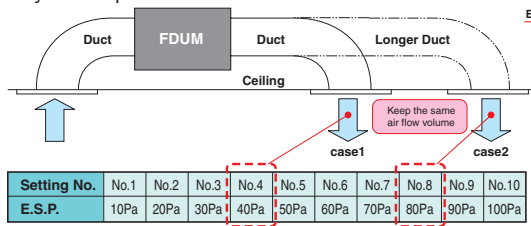

E.S.P. button RC-E5  
External static pressure (E.S.P.) can be set by E.S.P. button.

### Thin design

The height of all FDUM models is only 280mm.




FDUM112/140KXE6F



FDUM22-90KXE6F

### Improvement of the serviceability

Fan unit (impeller and motor) can be pulled out from the right side or the bottom side of the unit.  
Maintenance can be available from the right side or the bottom side.



### Transparent inspection window

Dirt condition of the bottom of a drain pan can be checked through this transparent inspection window without removing drain pan. (Please refer to P60)

## Specifications

Item	Model	FDUM22KXE6F	FDUM28KXE6F	FDUM36KXE6F	FDUM45KXE6F	FDUM56KXE6F	FDUM71KXE6F	FDUM90KXE6F	FDUM112KXE6F	FDUM140KXE6F	FDUM160KXE6F	
Nominal cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	9.0	11.2	14.0	16.0	
Nominal heating capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0	10.0	12.5	16.0	18.0	
Power source		1 Phase 220-240V, 50Hz										
Power consumption	Cooling	0.10-0.10					0.20-0.20			0.29-0.29	0.33-0.33	0.45-0.45
	Heating	0.10-0.10					0.20-0.20			0.29-0.29	0.33-0.33	0.45-0.45
Sound power level	dB(A)	60					65			—		
Sound pressure level ※	dB(A)	Hi:32 Me:29 Lo:26					Hi:33 Me:29 Lo:25			Hi:38 Me:36 Lo:30	Hi:40 Me:34 Lo:29	Hi:40 Me:35 Lo:30
Exterior dimensions H x W x D	mm	280 x 750 x 635					280 x 950 x 635			280 x 1370 x 740		
Net weight	kg	29					34			54		
Air flow ※	m <sup>3</sup> /min	Hi:10 Me:9 Lo:8					Hi:19 Me:15 Lo:10			Hi:28 Me:25 Lo:19	Hi:32 Me:26 Lo:20	Hi:35 Me:28 Lo:22
Maximum external static pressure	Pa	100										
Outside air intake		Possible										
Air filter		Filter kit:UM-FL1EF/UM-FL2EF/UM-FL3EF(option)										
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E										
Installation data Refrigerant piping size	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")			Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")			Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")				

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. External static pressure of indoor unit is 35Pa(22/28/36/45/56/71/90), 60Pa(112/140/160).



2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

※ Powerful-Hi can be selected. Sound pressure level: FDUM22/28/36/45/56 37dB(A), FDUM71/90 38dB(A), FDUM112 44dB(A), FDUM140 45dB(A), FDUM160 47dB(A). Air flow: FDUM22/28/36/45/56 13m<sup>3</sup>/min, FDUM71/90 24m<sup>3</sup>/min, FDUM112 36m<sup>3</sup>/min, FDUM140 39m<sup>3</sup>/min, FDUM160 48m<sup>3</sup>/min.

# Dimensions


All measurements in mm.

## FDUM22KXE6F, 28KXE6F, 36KXE6F, 45KXE6F, 56KXE6F


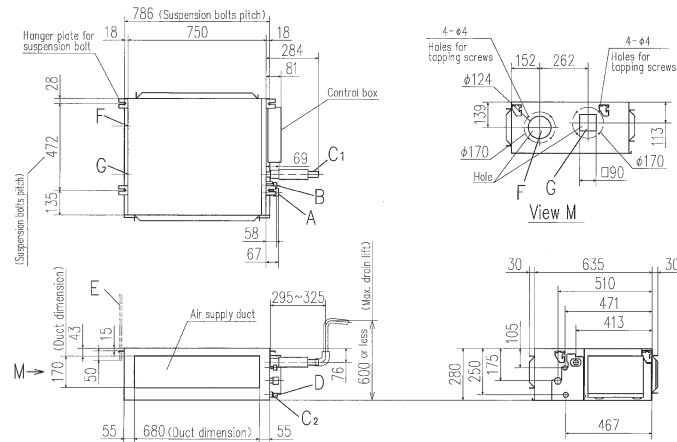


Symbol	Model	Content
A	Gas piping	22,28
B	Liquid piping	36,45,56
C1	Drain piping	VP25 (3/8") (Flare)
C2	Drain piping (Gravity drainage)	VP20 (1/2") (Flare)
D	Hole for wiring	ø12.7 (1/2") (Flare)
E	Suspension bolts	(M10)
F	Outside air opening for ducting	(Knock out)
G	Air outlet opening for ducting	(Knock out)
H	Inspection hole	(450X450)

Note: The model name label is attached on the lid of the control box.

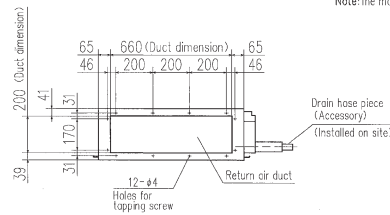


## FDUM71KXE6F, 90KXE6F


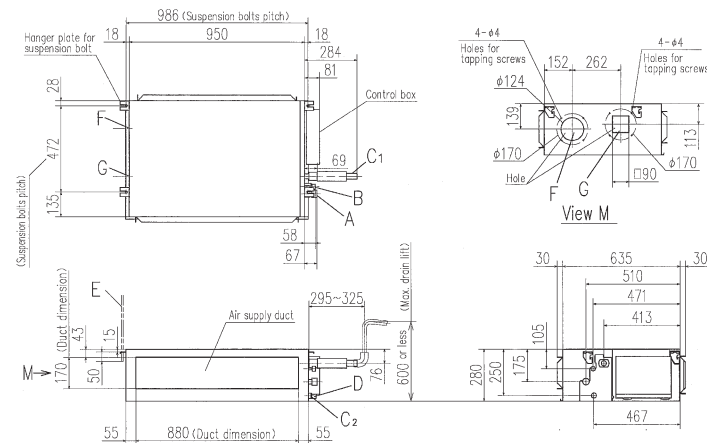


Symbol	Model	Content
A	Gas piping	27,28
B	Liquid piping	36,45,56
C1	Drain piping	VP25 (3/8") (Flare)
C2	Drain piping (Gravity drainage)	VP20 (1/2") (Flare)
D	Hole for wiring	ø12.7 (1/2") (Flare)
E	Suspension bolts	(M10)
F	Outside air opening for ducting	(Knock out)
G	Air outlet opening for ducting	(Knock out)
H	Inspection hole	(450X450)

Note: The model name label is attached on the lid of the control box.

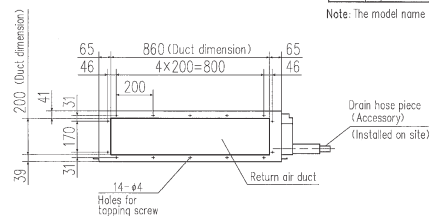


## FDUM112KXE6F, 140KXE6F, 160KXE6F

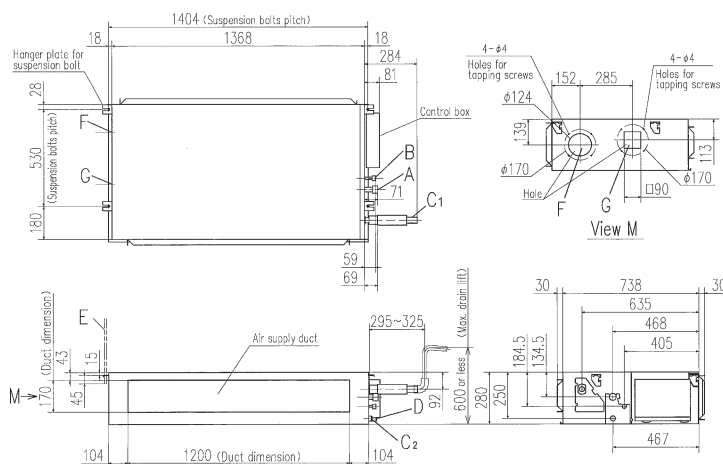

Symbol	Model	Content
A	Gas piping	27,28
B	Liquid piping	36,45,56
C1	Drain piping	VP25 (3/8") (Flare)
C2	Drain piping (Gravity drainage)	VP20 (1/2") (Flare)
D	Hole for wiring	ø12.7 (1/2") (Flare)
E	Suspension bolts	(M10)
F	Outside air opening for ducting	(Knock out)
G	Air outlet opening for ducting	(Knock out)
H	Inspection hole	(450X450)

Note: The model name label is attached on the lid of the control box.

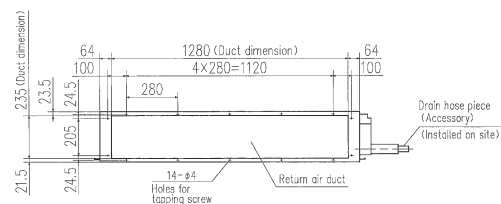

### Round duct adapter

In case of requirements of round duct adapter, please access the followings for details.

Company | AIRZONE  
 e-mail | [jmoral@altracorporacion.es](mailto:jmoral@altracorporacion.es)  
 tel | +34-902-400-445

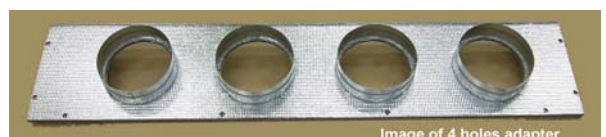


Image of 4 holes adapter

# Duct Connected (thin) -Low Static Pressure- FDUT


**Model No.**  
 FDUT15KXE6F-E  
 FDUT22KXE6F-E  
 FDUT28KXE6F-E  
 FDUT36KXE6F-E  
 FDUT45KXE6F-E  
 FDUT56KXE6F-E  
 FDUT71KXE6F-E




## Remote control (option)




### Compact design

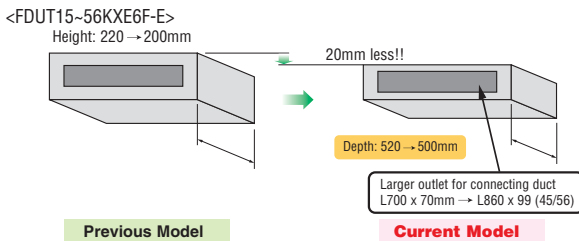

### Lower noise

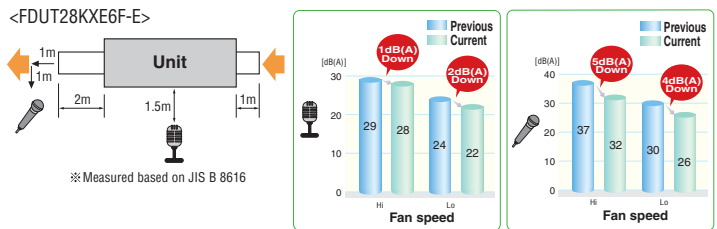


### Serviceability

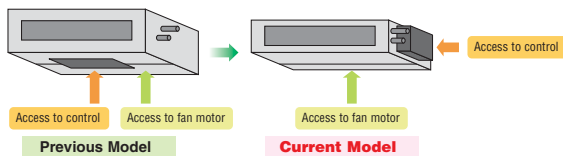

### Duct kit and filter options

Item	Contents	for FDUT15/22/28/36KXE6F-E	for FDUT45/56KXE6F-E	for FDUT71KXE6F-E
Outlet duct plate	①	UT-SAT1EF	UT-SAT2EF	UT-SAT3EF
Filter set	②+③	UT-FL1EF	UT-FL2EF	UT-FL3EF

Filter pressure loss : 5 Pa

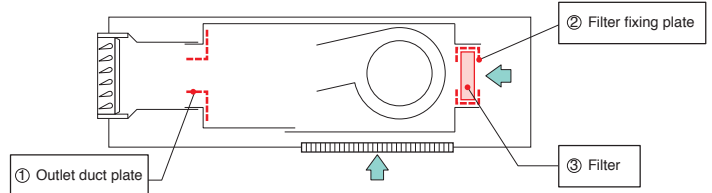

## Specifications


Item	Model	FDUT15KXE6F-E	FDUT22KXE6F-E	FDUT28KXE6F-E	FDUT36KXE6F-E	FDUT45KXE6F-E	FDUT56KXE6F-E	FDUT71KXE6F-E
Nominal cooling capacity	kW	1.5	2.2	2.8	3.6	4.5	5.6	7.1
Nominal heating capacity	kW	1.7	2.5	3.2	4.0	5.0	6.0	8.0
Power source		1 Phase 220-240V, 50Hz						
Power consumption	Cooling	0.06-0.06		0.07-0.07		0.08-0.08		0.08-0.08
	Heating	0.06-0.06		0.07-0.07		0.08-0.08		0.07-0.07
Sound power level	dB(A)	52			57	58	59	
Sound pressure level ①	dB(A)	Hi:28 Me:26 Lo:22	Hi:28 Me:26 Lo:22		Hi:33 Me:30 Lo:26	Hi:34 Me:32 Lo:28	Hi:35 Me:33 Lo:30	Hi:35 Me:31 Lo:28
Sound pressure level ②	dB(A)	Hi:32 Me:29 Lo:25	Hi:32 Me:29 Lo:26		Hi:37 Me:34 Lo:28	Hi:36 Me:33 Lo:27	Hi:38 Me:33 Lo:29	Hi:41 Me:37 Lo:32
Exterior dimensions H x W x D	mm	200x750x500				200x950x500		220x1150x565
Net weight	kg	21			22	25		31
Air flow (Standard)	m³/min	Hi:6 Me:5 Lo:4	Hi:7.5 Me:6 Lo:5		Hi:8.5 Me:7 Lo:5.5	Hi:11.5 Me:9 Lo:7	Hi:12.5 Me:9 Lo:7.2	Hi:16 Me:13 Lo:9.5
External Static pressure	Pa	Standard:10, Max:35				Standard:10, Max:50		
Outside air intake		Possible from return duct						
Air filter		Filter set:UT-FL1EF/UT-FL2EF/UT-FL3EF(option)						
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E						
Installation data Refrigerant piping size	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")			Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")		Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. External static pressure of indoor unit is 10Pa.  
 2. The data of nominal cooling and heating capacity and sound pressure level are measured with 10Pa of external static pressure.  
 3. The sound level indicates the value of rear-intake type with duct in anechoic chamber. During operation these values are somewhat higher due to ambient conditions.  
 4. Sound pressure levels are values when 2m supply duct and 1m return duct are connected.  
 ①: Mike position is 1.5m below unit, ②: Mike position is 1m in front and 1m below the air supply duct.

# Dimensions


All measurements in mm.

FDUT15KXE6F-E, 22KXE6F-E, 28KXE6F-E, 36KXE6F-E

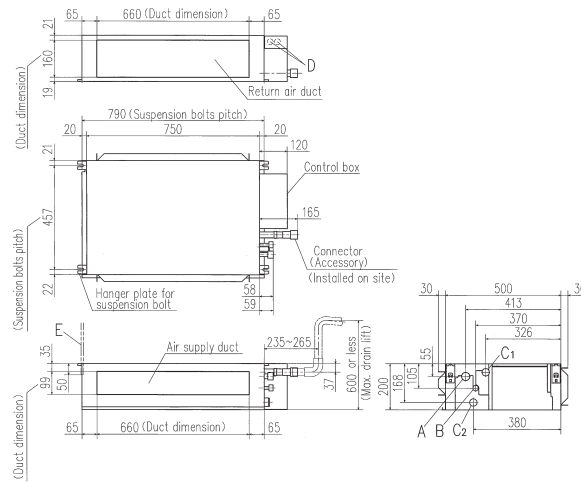


Symbol	Model	Content
		15, 22, 28, 36
A	Gas piping	φ9.52 (3/8") (Flare) φ12.7 (1/2") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)
C1	Drain piping	VP25 (I.D. 25, O.D. 32)
C2	Drain piping (Gravelly drainage)	VP25 (I.D. 25, O.D. 32)
D	Hole for wiring	φ25 x 2
E	Suspension bolts	(M10)
F	Inspection hole	(450X450), (270X170)

Space for installation and service

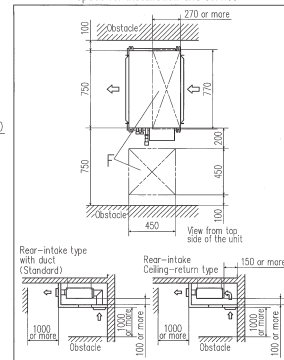


FDUT45KXE6F-E, 56KXE6F-E

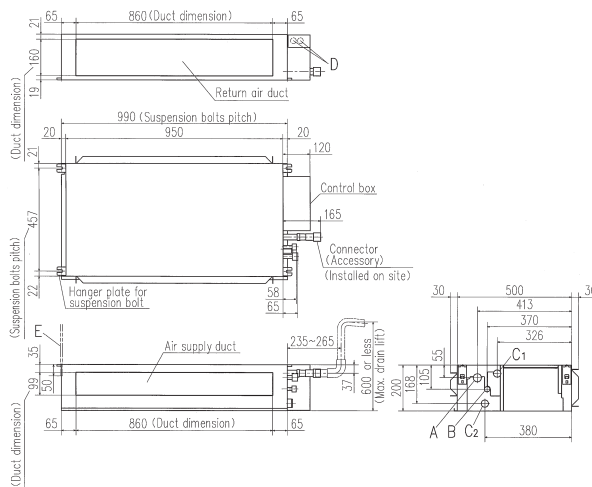


Symbol	Model	Content
		45, 56
A	Gas piping	φ12.7 (1/2") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)
C1	Drain piping	VP25 (I.D. 25, O.D. 32)
C2	Drain piping (Gravelly drainage)	VP25 (I.D. 25, O.D. 32)
D	Hole for wiring	φ25 x 2
E	Suspension bolts	(M10)
F	Inspection hole	(450X450), (270X190)

Space for installation and service

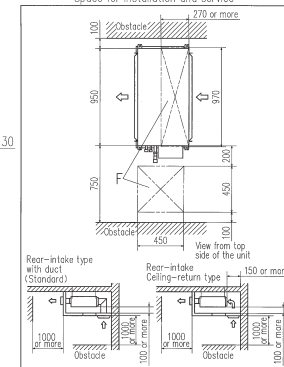


FDUT71KXE6F-E

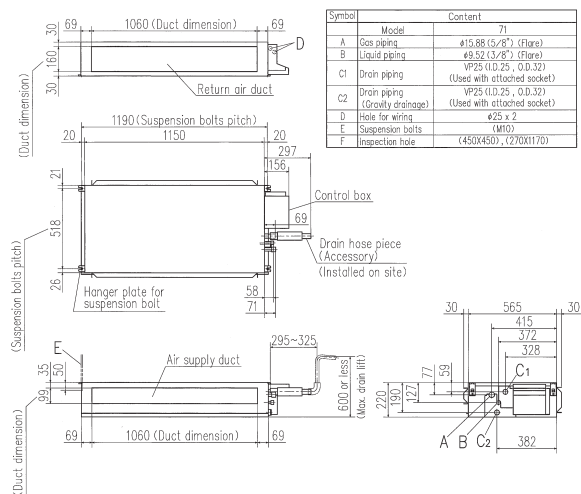

Symbol	Model	Content
		71
A	Gas piping	φ15.88 (5/8") (Flare)
B	Liquid piping	φ9.52 (3/8") (Flare)
C1	Drain piping	VP25 (I.D. 25, O.D. 32)
C2	Drain piping (Gravelly drainage)	VP25 (I.D. 25, O.D. 32)
D	Hole for wiring	φ25 x 2
E	Suspension bolts	(M10)
F	Inspection hole	(450X450), (270X170)


Space for installation and service

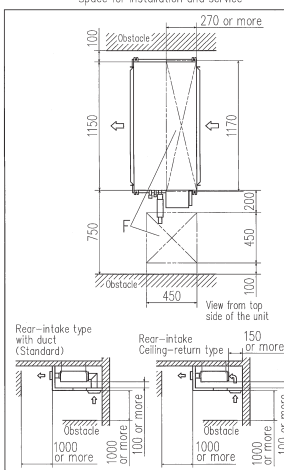



# Duct Connected (Compact & Flexible) FDUH

**Model No.**  
FDUH22KXE6F  
FDUH28KXE6F  
FDUH36KXE6F



**Drain up kit (option)**  
(600mm)  
**UH-DU-E**

## Remote control (option)

Wired



**RC-EX1A RC-E5 RCH-E3**

Wireless



**RCN-KIT3-E**


**Filter kit (option)**  
**UH-FL1E**



\*Filter pressure loss:5pa

### Compact and thin size, light weight

Our leading high technology has realized the best solution for air conditioning in hotels with compact and thin size units and high energy efficiency. In addition, weight is only 20kg.




### Quiet operation

The lowest sound level in the industry can ensure comfortable stay and rest in hotels.

### Installation Flexibility

Control box and drain piping can be installed on both side of the unit and air intake to the unit is available from bottom or back side. Our highest technology can satisfy diverse installation requirements.

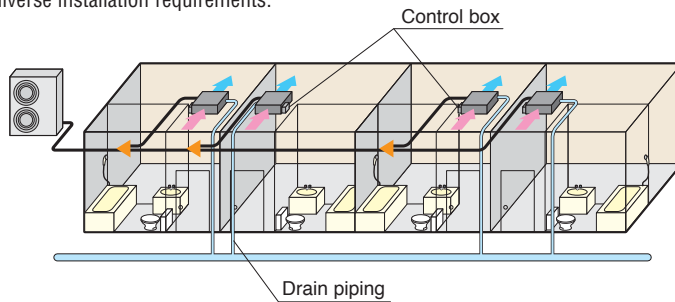

## Wired remote control



**RCH-E3 (option)**

### Simple remote control

Considering specialized usage in hotel rooms, control buttons are limited only to minimum required functions such as ON/OFF, mode, temperature setting and fan speed. It is really simple and easy to use.

## Specifications


Item	Model	FDUH22KXE6F	FDUH28KXE6F	FDUH36KXE6F
Nominal cooling capacity	kW	2.2	2.8	3.6
Nominal heating capacity	kW	2.5	3.2	4.0
Power source		1 Phase 220-240V, 50Hz		
Power consumption	Cooling	0.05-0.07		
	Heating	0.05-0.07		
Sound power level	dB(A)	60		
Sound pressure level**	dB(A)	Hi: 33 Me: 30 Lo: 27		
Exterior dimensions HxWxD	mm	257x570x530		
Net weight	kg	22		
Air flow**	m <sup>3</sup> /min	Hi: 7 Me: 6.5 Lo: 6		
External static pressure	Pa	30		
Outside air intake		Possible from return duct		
Air filter		Filter kit:UH-FL1E(option)		
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E		
Installation data	mm(m)	Liquid line:ø6.35(1/4")		Liquid line:ø6.35(1/4")
	Refrigerant piping size	Gas line:ø9.52(3/8")		Gas line:ø12.7(1/2")

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.  
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.







\*\* Powerful-Hi can be selected. Sound pressure level: FDUH22/28/36 39dB(A). Air flow: FDUH22/28/36 8.5m<sup>3</sup>/min.

# Dimensions


All measurements in mm.

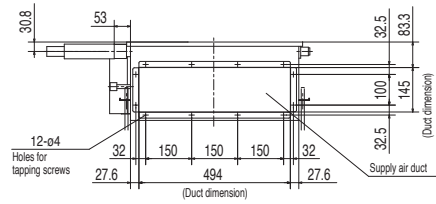


Symbol	Content		
	Model	FDUH22KXE6F 28KXE6F	FDUH36KXE6F
A	Gas piping	ø9.52 (3/8") (Flare)	ø12.7 (1/2") (Flare)
B	Liquid piping	ø6.35 (1/4") (Flare)	
C <sub>1</sub> , C <sub>2</sub>	Drain piping	VP20(I, D, 20, O, D, 26) Note (2)	
D	Hole for wiring	ø30	
E	Suspension bolts	(M10)	
F	Inspection hole	(635X890) Note (3)	

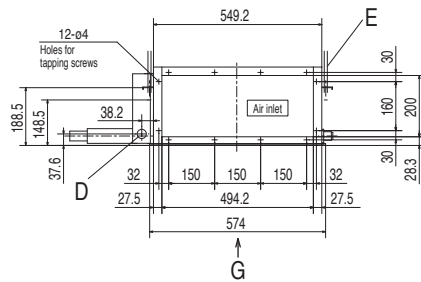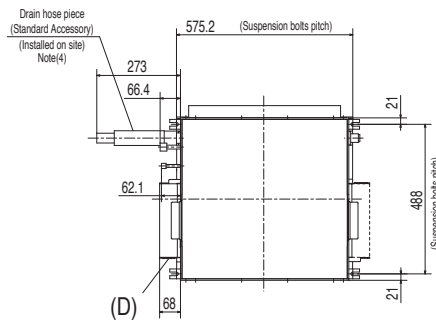

## In case of Bottom air intake



## Simple remote control



## Notes

- (1) The model name label is attached on the fan case inside the air return grille.
- (2) Prepare the connecting socket (VP20) on site. (As for drain piping, it is possible to choose C<sub>1</sub> or C<sub>2</sub>)
- (3) When control box is located on the reverse side, installation space should be modified to new location.
- (4) Control box and Drain hose piece are able to be relocated on the reverse side.





# Wall Mounted FDK

## Model No.

- FDK22KXE6F
- FDK28KXE6F
- FDK36KXE6F
- FDK45KXE6F
- FDK56KXE6F
- FDK71KXE6F



FDK22-56



FDK71

## Remote control (option)

Wired



RC-EX1A



RC-E5




RCH-E3

Wireless



RCN-K-E : FDK22-56  
RCN-K71-E : FDK71

### Innovative Design




Fast ← → Slow  
Colors in the figure show the air speed.

New FDK models adopt the air flow design that's proven to minimise resistance in a CFD analysis to achieve uniform air conditioning to the furthest corners of the room.


### Flap control system

Selection of flap position is possible. A flap can be set at different angles.

\*RCH-E3 is not applicable to the flap control system.



### Installation Workability



The new slimmer design allows easy & neat installation even in tight spaces.

### Improved Maintainability

Also included is a new easy clean mechanism where the front panel is opened/closed simply from the bottom to easily access the detachable filters.

## Specifications

Item	Model	FDK22KXE6F	FDK28KXE6F	FDK36KXE6F	FDK45KXE6F	FDK56KXE6F	FDK71KXE6F	
Nominal cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	
Nominal heating capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0	
Power source		1 Phase 220-240V, 50Hz						
Power consumption	Cooling	0.05-0.05			0.05-0.05		0.09-0.09	
	Heating	0.04-0.04			0.05-0.05		0.09-0.09	
Sound power level	dB(A)	57			60			
Sound pressure level **	Cooling	Hi:35 Me:33 Lo:31		Hi:41 Me:35 Lo:31	Hi:42 Me:37 Lo:33		Hi:46 Me:42 Lo:37	
	Heating	Hi:35 Me:33 Lo:31		Hi:39 Me:35 Lo:31	Hi:42 Me:37 Lo:33		Hi:46 Me:42 Lo:37	
Exterior dimensions H x W x D	mm	298 x 840 x 259					318 x 1098 x 248	
Net weight	kg	12		12.5		13	15.5	
Air flow **	m <sup>3</sup> /min	Hi:8 Me:7 Lo:6		Hi:10 Me:9 Lo:7	Hi:11 Me:9 Lo:7		Hi:14 Me:12 Lo:10	
Outside air intake		Not possible						
Air filter, Q'ty		Polypropylene net x2 (Washable)						
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-K-E (for FDK22-56), RCN-K71-E (for FDK71)						
Installation data Refrigerant piping size	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")		Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")		Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")		


1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.  
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

\*\* Powerful-Hi can be selected. Sound pressure level: FDK22/28 38dB(A), FDK36 48dB(A)(Cooling)&42dB(A)(Heating), FDK45 48dB(A)(Cooling)&43dB(A)(Heating), FDK56 48dB(A)(Cooling)&47dB(A)(Heating), FDK71 48dB(A).  
Air flow: FDK22/28 11m<sup>3</sup>/min, FDK36/45 15m<sup>3</sup>/min, FDK56 16m<sup>3</sup>/min, FDK71 24m<sup>3</sup>/min.


# Dimensions

All measurements in mm.


## FDK22KXE6F, 28KXE6F, 36KXE6F, 45KXE6F, 56KXE6F

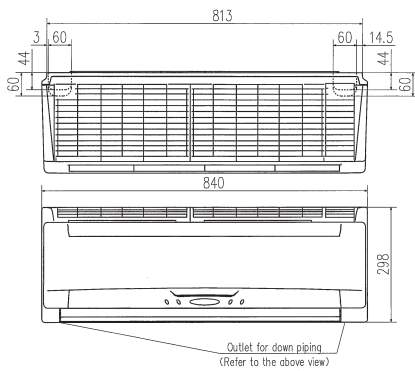


Note (1) The model name label is attached on the underside of the panel.

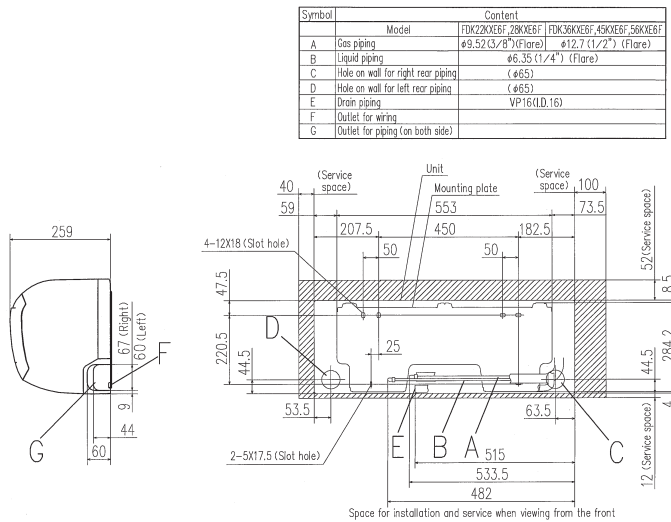

## FDK71KXE6F

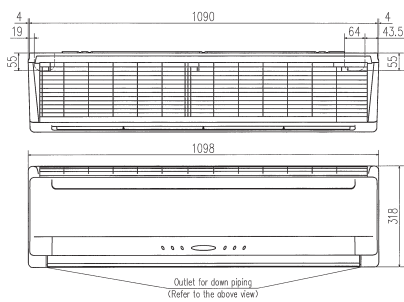

Note (1) The model name label is attached on the underside of the panel.

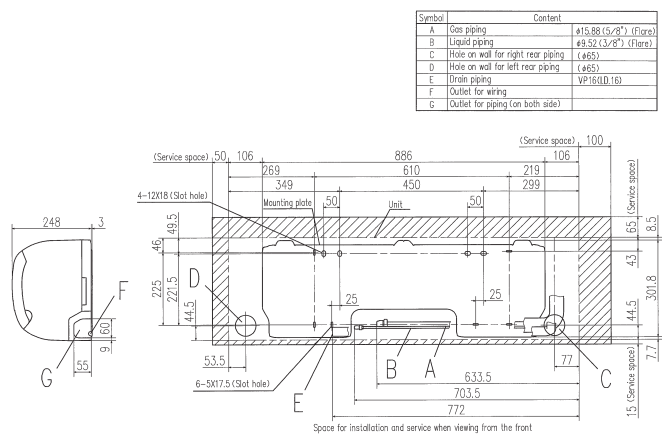



# Ceiling Suspended FDE

## Model No.

- FDE36KXE6F
- FDE45KXE6F
- FDE56KXE6F
- FDE71KXE6F
- FDE112KXE6F
- FDE140KXE6F



## Remote control (option)

Wired



RC-EX1A RC-E5 RCH-E3

Wireless




RCN-E-E


### Flap control system

Selection of flap position is possible. A flap can be set at different angles.

\*RCH-E3 is not applicable to the flap control system.

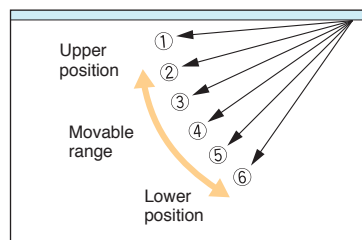


### New Slim Design

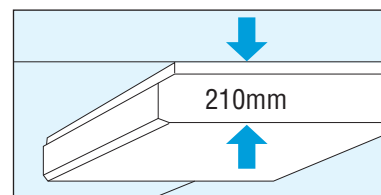

Slim and sleek design starting at just 28kgs in weight means quick, easy & neat installation.

### Installation Workability

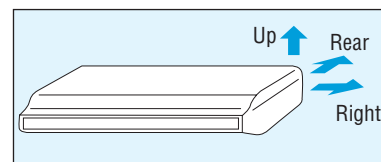

Refrigerant piping can be routed in three directions (rear, up, right) & drain piping in left or right directions, allowing free layout to meet installation conditions.

## Specifications

Item	Model	FDE36KXE6F	FDE45KXE6F	FDE56KXE6F	FDE71KXE6F	FDE112KXE6F	FDE140KXE6F
Nominal cooling capacity	kW	3.6	4.5	5.6	7.1	11.2	14.0
Nominal heating capacity	kW	4.0	5.0	6.3	8.0	12.5	16.0
Power source		1 Phase 220-240V, 50Hz					
Power consumption	Cooling	0.05-0.06			0.10-0.11	0.14-0.16	0.16-0.18
	Heating	0.05-0.06			0.09-0.10	0.13-0.15	0.15-0.17
Sound power level	dB(A)	60			62	—	
Sound pressure level ※	dB(A)	Hi:39 Me:38 Lo:36			Hi:41 Me:39 Lo:37	Hi:44 Me:41 Lo:39	Hi:46 Me:44 Lo:43
Exterior dimensions H x W x D	mm	210 x 1070 x 690			210 x 1320 x 690	250 x 1620 x 690	
Net weight	kg	28			37	49	
Air flow ※	m <sup>3</sup> /min	Hi:10 Me:9 Lo:7			Hi:16 Me:14 Lo:12	Hi:26 Me:23 Lo:21	Hi:29 Me:26 Lo:23
Outside air intake		Not possible					
Air filter, Q'ty		Pocket Plastic net x2 (Washable)					
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-E-E					
Installation data Refrigerant piping size	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")			Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")		



1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

※ Powerful-Hi can be selected. Sound pressure level: FDE36/45/56 46dB(A), FDE71 50dB(A), FDE112 46dB(A), FDE140 50dB(A). Air flow: FDE36/45/56 11m<sup>3</sup>/min, FDE71 18m<sup>3</sup>/min, FDE112 28m<sup>3</sup>/min, FDE140 32m<sup>3</sup>/min.


# Dimensions

All measurements in mm.

## FDE36KXE6F, 45KXE6F, 56KXE6F

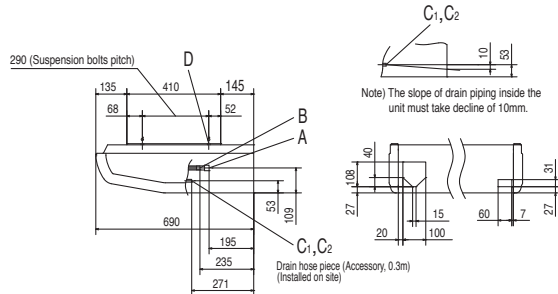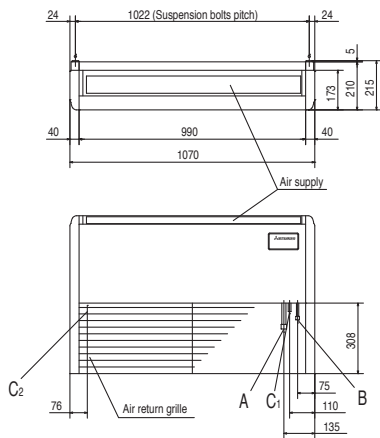



Symbol	Content
A	Gas piping $\phi 12.7$ (1/2") (Flare)
B	Liquid piping $\phi 6.35$ (1/4") (Flare)
C 1,2	Drain piping VP20 (I.D.20)
D	Hole for suspension bolt (M10 or M8)
E	Back cutout PE cover
F	Top cutout Plate cover
G	Hole for drain piping (for left back) (Knock out)

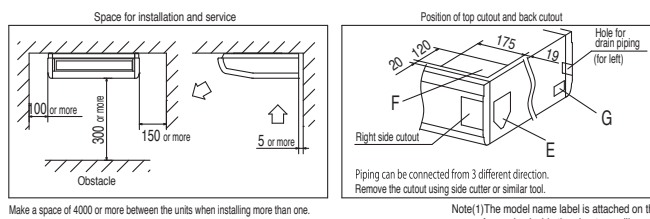


Make a space of 4000 or more between the units when installing more than one.

Note(1) The model name label is attached on the fan casing inside the air return grille.

## FDE71KXE6F

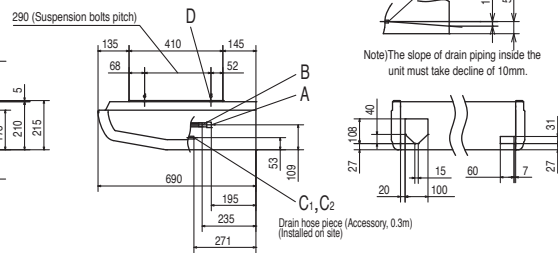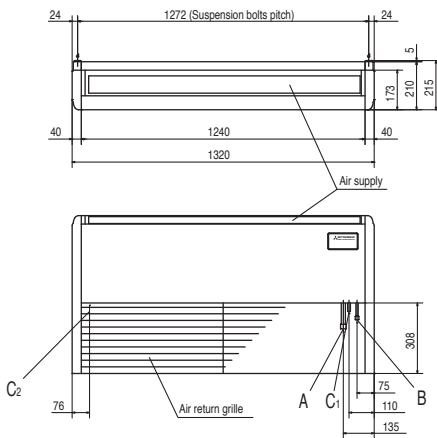



Symbol	Content
A	Gas piping $\phi 15.88$ (5/8") (Flare)
B	Liquid piping $\phi 9.52$ (3/8") (Flare)
C 1,2	Drain piping VP20 (I.D.20)
D	Hole for suspension bolt (M10 or M8)
E	Back cutout PE cover
F	Top cutout Plate cover
G	Hole for drain piping (for left back) (Knock out)

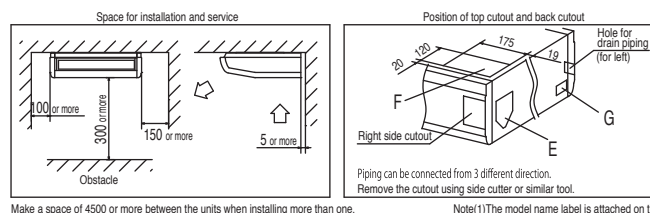


Make a space of 4500 or more between the units when installing more than one.

Note(1) The model name label is attached on the fan casing inside the air return grille.

## FDE112KXE6F, 140KXE6F

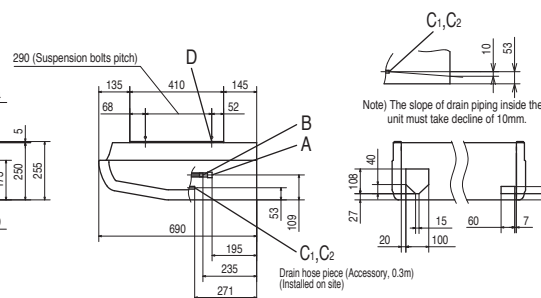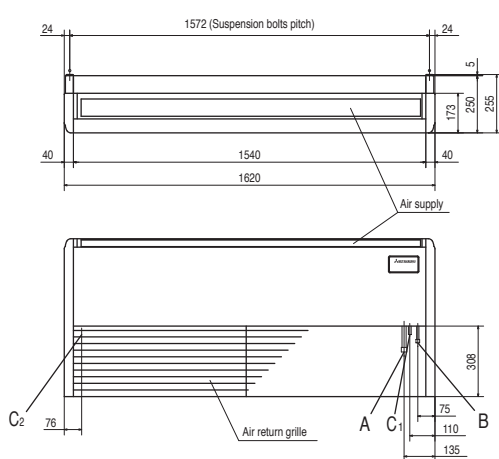

Symbol	Content
A	Gas piping $\phi 15.88$ (5/8") (Flare)
B	Liquid piping $\phi 9.52$ (3/8") (Flare)
C 1,2	Drain piping VP20 (I.D.20)
D	Hole for suspension bolt (M10 or M8)
E	Back cutout PE cover
F	Top cutout Plate cover
G	Hole for drain piping (for left back) (Knock out)

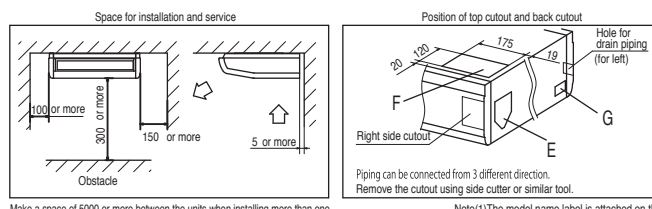

Make a space of 5000 or more between the units when installing more than one.

Note(1) The model name label is attached on the fan casing inside the air return grille.



# Floor Standing -2way- FDFW

## Model No.

FDFW28KXE6F  
FDFW45KXE6F  
FDFW56KXE6F



## Remote control (option)

Wired



RC-EX1A

RC-E5

RCH-E3

Wireless



RCN-FW-E

### Sophisticated Design


With classy semi flat front panel in chic white, the new series fit in various kinds of rooms and create relaxing atmosphere. Choice of wall hanging, floor standing or behind gallery installation is available.

### Quiet Operation

Thanks to optimum balance of air outlet direction and sufficient air flow volume, the sound level has been minimized. The level of FDFW28KXE6F in the cooling lo mode is 30dB(A) only.

### Flap control system


Selection of flap position is possible. A flap can be set at different angles.

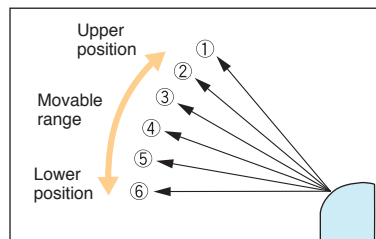

\*RCH-E3 is not applicable to the flap control system.

### Convenient to use operation

Simultaneous lower and upper air outlets or upper outlet can be selected by air flow direction button. Further control can be arranged by a remote control.

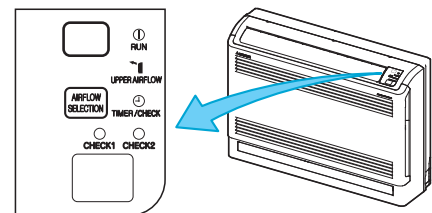

(In case of use of wireless remote control)



## Specifications

Item	Model	FDFW28KXE6F	FDFW45KXE6F	FDFW56KXE6F
Nominal cooling capacity	kW	2.8	4.5	5.6
Nominal heating capacity	kW	3.2	5.0	6.3
Power source		1 Phase 220-240V, 50Hz		
Power consumption	Cooling	0.02-0.02	0.02-0.02	0.03-0.03
	Heating	0.02-0.02	0.02-0.02	0.03-0.03
Sound power level	dB(A)	55	57	60
Sound pressure level	dB(A)	Hi:36 Me:34 Lo:30	Hi:38 Me:36 Lo:33	Hi:44 Me:37 Lo:33
Exterior dimensions H x W x D	mm	600x860x238		
Net weight	kg	19	20	20
Air flow (Standard)	m <sup>3</sup> /min	Hi:9 Me:8 Lo:7		Hi:11 Me:9 Lo:8
Air filter, Q'ty		Polypropylene net x1 (Washable)		
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-FW-E		
Installation data Refrigerant piping size	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")		Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")



1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.  
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

# Dimensions

All measurements in mm.

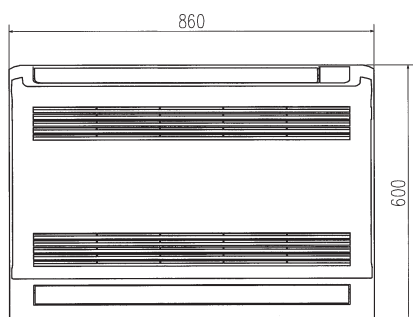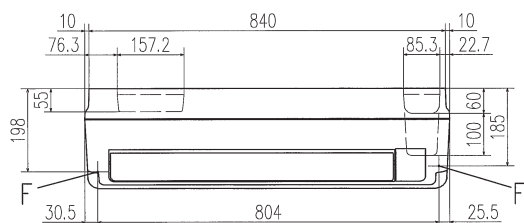

Outlet for down piping  
(Refer to the above view)

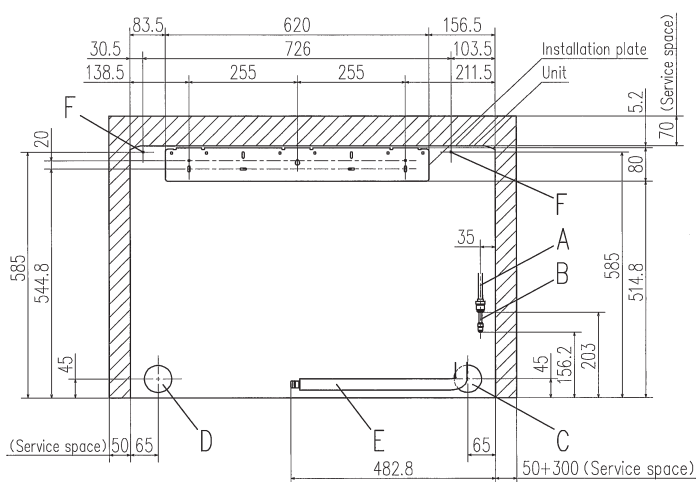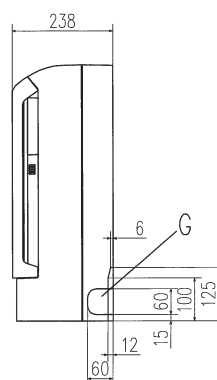

Space for installation and service when viewing from the front

Symbol	Content	
	Model	
A	Gas piping	FDW28KXE6F $\phi 9.52$ (3/8") (Flare)   FDFW45KXE6F, 56KXE6F $\phi 12.7$ (1/2") (Flare)
B	Liquid piping	$\phi 6.35$ (1/4") (Flare)
C	Hole on wall for right rear piping	( $\phi 65$ )
D	Hole on wall for left rear piping	( $\phi 65$ )
E	Drain hose	VP16 (I.D.16)
F	Screw point fasten the indoor unit	$\phi 5$
G	Outlet for piping (on both side)	

Notes

- (1) The model name label is attached on the right side of the unit.
- (2) In case of wall installation, leave the unit 150mm or less from the floor.





# Floor Standing (with casing)

## FDFL

# Floor Standing (without casing)

## DFDU

### Remote control (option)

Wired



RC-EX1A



RC-E5



RCH-E3

Wireless



RCN-KIT3-E



### Model No.

FDFL71KXE6F

DFDU28KXE6F


DFDU45KXE6F

DFDU56KXE6F

DFDU71KXE6F




FDFL

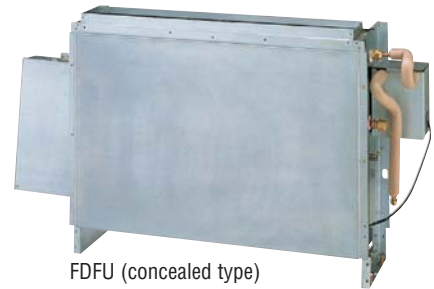

DFDU (concealed type)



Compact design at 630mm height

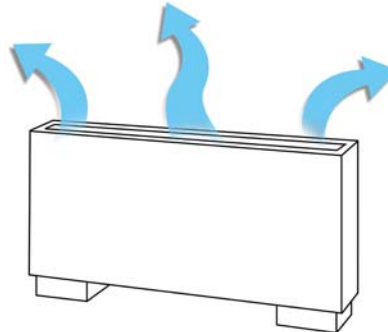

Wider airflow for optimum comfort

## Specifications


Item	Model	FDFL71KXE6F	DFDU28KXE6F	DFDU45KXE6F	DFDU56KXE6F	DFDU71KXE6F
Nominal cooling capacity	kW	7.1	2.8	4.5	5.6	7.1
Nominal heating capacity	kW	8.0	3.2	5.0	6.3	8.0
Power source		1 Phase 220-240V, 50Hz				
Power consumption	Cooling	0.09-0.10		0.09-0.10		
	Heating	0.09-0.10		0.09-0.10		
Sound power level	dB(A)	62	58	60		
Sound pressure level	dB(A)	Hi:43 Me:41 Lo:40	Hi:41 Me:38 Lo:36	Hi:43 Me:41 Lo:40		
Exterior dimensions H x W x D	mm	630x1481x225	630x1077x225			630x1362x225
Net weight	kg	40	25			32
Air flow (Standard)	m <sup>3</sup> /min	Hi:18 Me:15 Lo:12	Hi:12 Me:11 Lo:10	Hi:14 Me:12 Lo:10		Hi:18 Me:15 Lo:12
Air filter, Q'ty		Polypropylene net x1 (Washable)				
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E				
Installation data Refrigerant piping size	mm(in)	Liquid line:ø9.52(3/8")	Liquid line:ø6.35(1/4")	Liquid line:ø6.35(1/4")		Liquid line:ø9.52(3/8")
		Gas line:ø15.88(5/8")	Gas line:ø9.52(3/8")	Gas line:ø12.7(1/2")		Gas line:ø15.88(5/8")

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.  
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

# Dimensions

All measurements in mm.


## FDFL

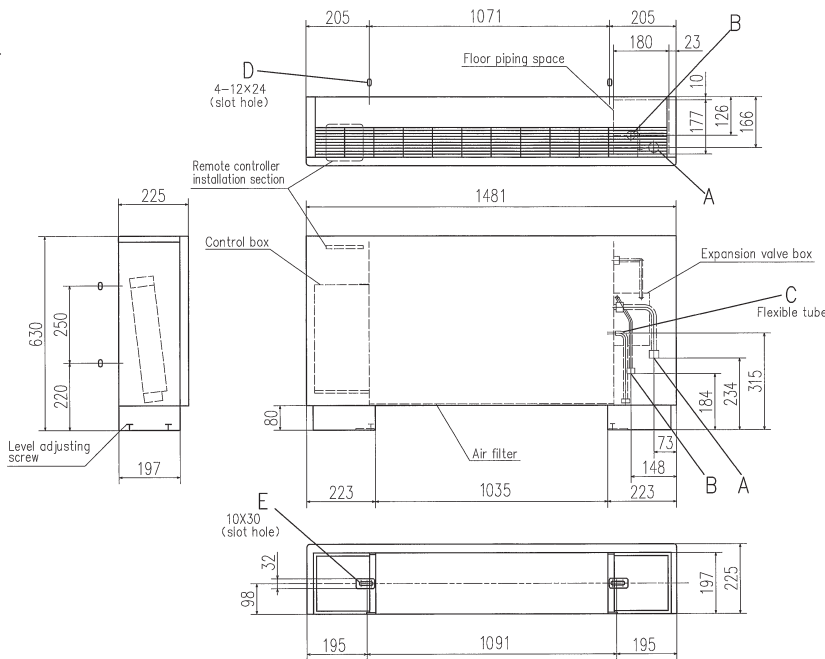


Symbol	Content	
	Model	FDFL71KXE6F
A	Gas piping (Accessory)	φ15.88 (5/8") (Flare)
B	Liquid piping	φ9.52 (3/8") (Flare)
C	Drain piping (Accessory)	PT20A female screw, 360mm
D	Slot hole for wall mounting	(M10)
E	Metal plate for floor mounting (Accessory)	(M8)

Note (1) The model name label is attached on the lid of the control box.

Space for installation and service




## DFDU

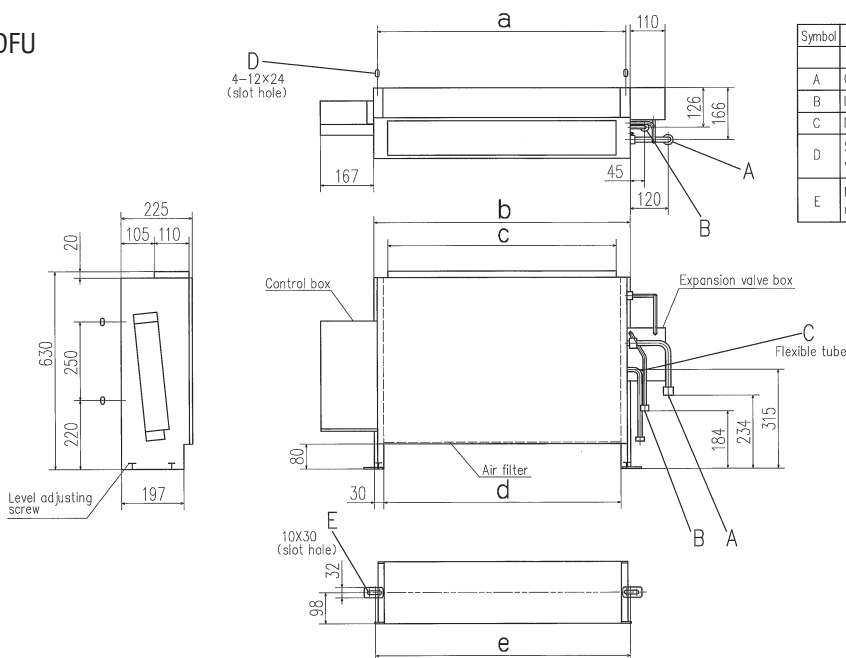

Symbol	Content			
	Model	DFDU28KXE6F	DFDU45KXE6F, 56KXE6F	DFDU71KXE6F
A	Gas piping (Accessory)	φ9.52 (3/8") (Flare)	φ12.7 (1/2") (Flare)	φ15.88 (5/8") (Flare)
B	Liquid piping	φ6.35 (1/4") (Flare)		φ9.52 (3/8") (Flare)
C	Drain piping (Accessory)	PT20A female screw, 360mm		PT20A female screw, 360mm
D	Slot hole for wall mounting	(M10)		(M10)
E	Metal plate for floor mounting (Accessory)	(MB)		(MB)

Note (1) The model name label is attached on the lid of the control box.

Space for installation and service



## Dimension Table

Unit:mm

model	a	b	c	d	e
DFDU28KXE6F, 45KXE6F, 56KXE6F	786	810	722	750	806
DFDU71KXE6F	1071	1095	1007	1035	1091



# Outdoor Air Processing unit FDU-F

**Model No.**  
FDU650FKXZE1  
FDU1100FKXZE1  
FDU1800FKXZE1  
FDU2400FKXZE1

**NEW**



## Remote control (option)

Wired



RC-EX1A RC-E5 RCH-E3


Wireless



RCN-KIT3-E


### Air conditioning and intake of outdoor air are in the same system

Outdoor Air processing unit can be connected in a KXZ system as one of indoor unit series and can create fresh and comfortable air supply together from our high advanced technology.

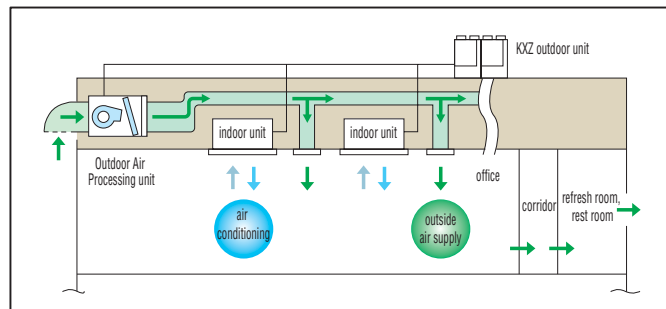

### Compact design

Compact design at just 280(650, 1100), 379(1800, 2400)mm in height, high static pressure of 200Pa and the industry's lowest noise level can meet various kind of installation location for office, refresh room, restroom and kitchen of restaurant etc.

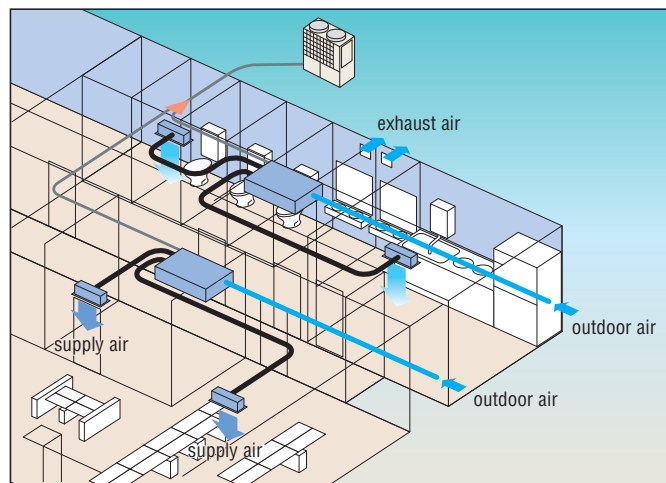


- (1) This unit is the specific unit for processing the outdoor air temperature closer to the room temperature. For conditioning the room temperature a dedicated air-conditioner is required additionally.
- (2) This unit monitors the outdoor air temperature and controls thermostat ON/OFF at the setting temperature by the remote controller, which indicates the outdoor air temperature for controlling thermostat ON/OFF. When thermostat is turned OFF, the operation is changed to the fan mode so that unprocessed outdoor air will be blown into the room directly. Therefore place the air outlet port or orient the air outlet direction not to blow air directly to persons in the room, especially in the small room such as a restroom and/or sanitary hot water supplying room.
- (3) It is strictly prohibited to monitor the room temperature by switching to the thermistor at remote controller side and/or the optional remote thermistor. Otherwise dew formation at air outlet port and/or dew dripping may occur during cooling operation due to the lower outdoor air temperature. Therefore keep the remote controller of this unit in place closer to the administrator so as not to be touched it freely by the end user.
- (4) Dehumidifying operation with this unit is prohibited.
- (5) When handing over this unit to the end user, make sure to explain sufficiently about the foregoing cautions, the installation place and usage of remote control for this unit and the location of the air outlet.

## Connectivity with Outdoor units

FDU-F series are connectable to 8~60HP outdoor units, not connectable to 4~6HP, KXZ Lite.

## Combination with Outdoor units


	case	Combination
A	In case OA processing units only are connected with outdoor units.	The total capacity of FDU-F is 50~100% of outdoor capacity and max quantity of FDU-F is 2 units.
B	In case both of OA processing units and dedicated air-conditioner are connected with outdoor units.	The total capacity of FDU-F and dedicated air-conditioners is 50~100% of outdoor capacity and max quantity of FDU-F should be below 30% of outdoor unit capacity.

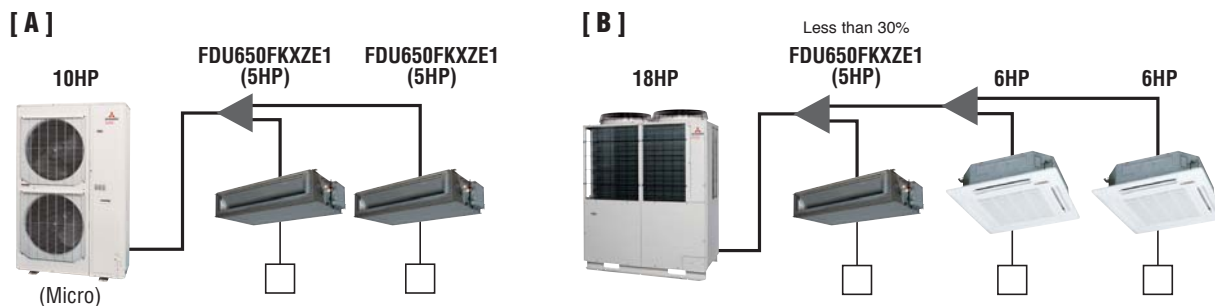


## Concept (Difference between FDU-F and SAF)

SAF is the energy recovery ventilation unit which can recover heat energy from exhaust air to supply air and "has no air processing function, but FDU-F is air processing unit which can treat the supply air closer to room temperature by cooling or heating in connection with KXZ refrigerant system and exhaust air is discharged to outside of the room.

### FDU-F OA Processing units

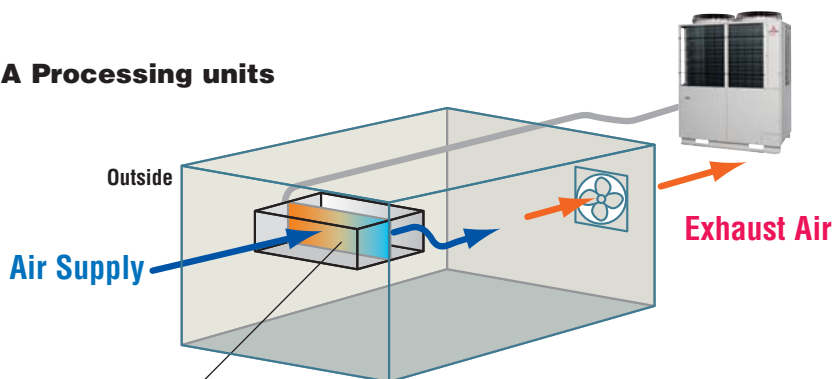

### SAF

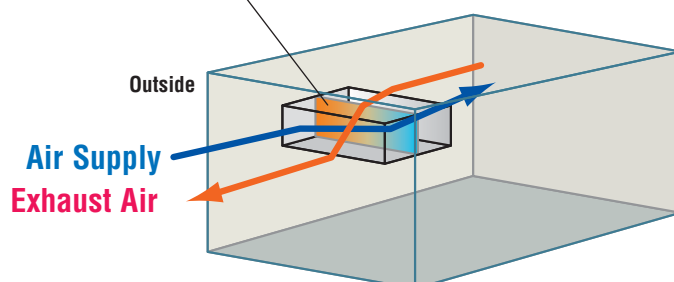



# Specifications


Item	Model	FDU650FKXZE1	FDU1100FKXZE1	FDU1800FKXZE1	FDU2400FKXZE1
Nominal cooling capacity	kW	9.0	14.0	22.4	28.0
Nominal heating capacity	kW	6.5	10.5	16.0	21.5
Power source		1 Phase 220-240V, 50Hz			
Power consumption	Cooling	0.24-0.25	0.35-0.36	1.16-1.20	1.16-1.20
	Heating	0.24-0.25	0.35-0.36	1.16-1.20	1.16-1.20
Sound pressure level	dB(A)	Hi:31	Hi:37	Hi:42	Hi:45
Exterior dimension HxWxD	mm	280x950x635	280x1370x740	379x1600x893	
Net weight	kg	34	54	89	89
Air flow (Standard)	m <sup>3</sup> /min	Hi:11	Hi:18	Hi:30	Hi:40
External static pressure	Pa	200 (at Hi Air flow)			
Air filter, Q'ty		Procure locally			
Remote control(option)		wired:RC-EX1A, RC-E5, RCH-E3 wireless:RCN-KIT3-E			
Installation data	mm	Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")		Liquid line:ø9.52(3/8") Gas line:ø19.05(3/4")	Liquid line:ø9.52(3/8") Gas line:ø22.22(7/8")
Refrigerating piping size	(in)				

- The data are measured at 33°CDB 28°CWB (68%RH) during cooling and 0°CDB-2.9°CWB (50%RH) during heating (no frost).
- Temperature range of outdoor air must be 20-40°CDB (32°CWB) during cooling and 0-24°CDB during heating.
- Sound level indicates the value in an anechoic chamber. During operation these value are somewhat higher due to ambient conditions.
- The factory E.S.P. setting is set within the range of 10 - 120Pa.If SW8-4 is turned to "ON", E.S.P. setting range can be changed to 10 - 200 Pa. (with RC-EX1A and RC-E5 only)


# Dimensions

All measurements in mm.


## FDU650FKXZE1

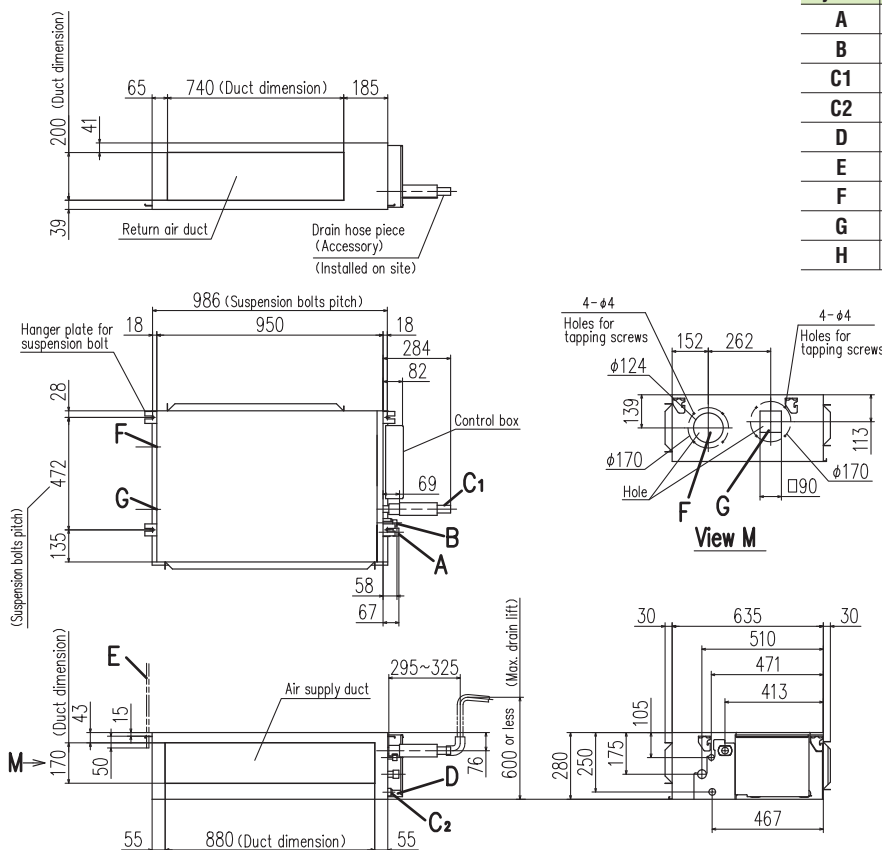


Symbol	Content	
<b>A</b>	Gas piping	ø15.88 (5/8") (Flare)
<b>B</b>	Liquid piping	ø9.52 (3/8") (Flare)
<b>C1</b>	Drain piping	VP25(O.D.32)
<b>C2</b>	Drain piping(Gravity drainage)	V20(O.D.26)
<b>D</b>	Hole for wiring	
<b>E</b>	Suspension bolts	M10
<b>F</b>	Outside air opening for ducting	(Knock out)
<b>G</b>	Air outlet opening for ducting	(Knock out)
<b>H</b>	Inspection hole	(450X450)

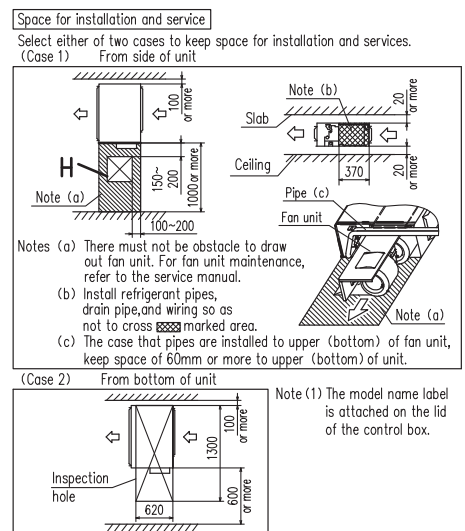


### FDU1100FKXZE1

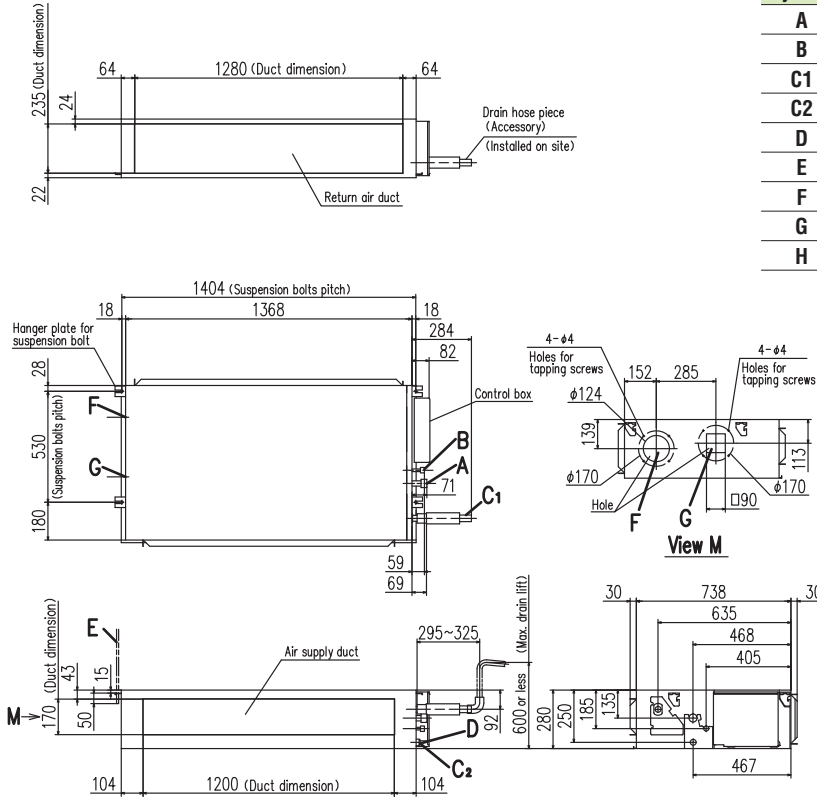


Symbol	Content	
A	Gas piping	ø15.88 (5/8") (Flare)
B	Liquid piping	ø9.52 (3/8") (Flare)
C1	Drain piping	VP25(O.D.32)
C2	Drain piping(Gravity drainage)	V20(O.D.26)
D	Hole for wiring	
E	Suspension bolts	M10
F	Outside air opening for ducting	(Knock out)
G	Air outlet opening for ducting	(Knock out)
H	Inspection hole	(450X450)

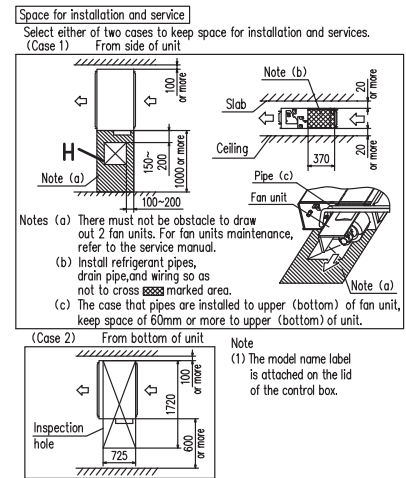

### FDU1800FKXZE1, FDU2400FKXZE1

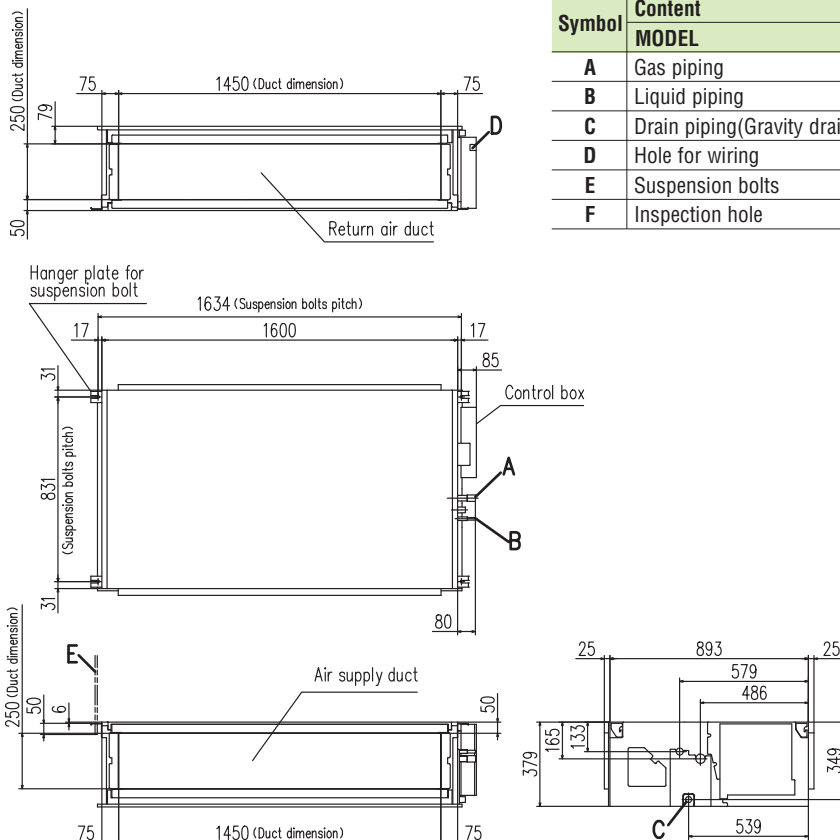

Symbol	Content	MODEL	
		1800	2400
A	Gas piping	ø19.05 (3/4")	ø22.22 (7/8")
B	Liquid piping	ø9.52 (3/8") (Brazing)	
C	Drain piping(Gravity drainage)	VP25(O.D.32)	
D	Hole for wiring		
E	Suspension bolts	M10	
F	Inspection hole	(450X450)	

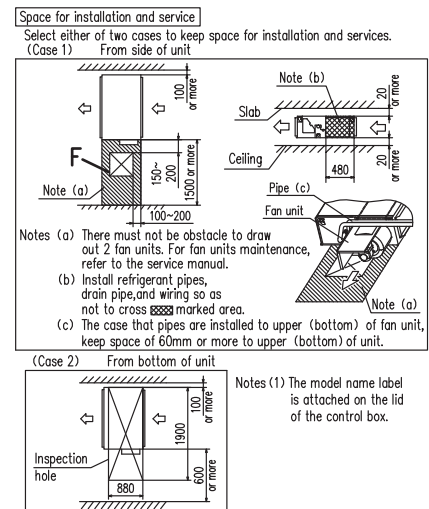





# Fresh Air Ventilation and Heat Exchange unit SAF-E6

## Model No.

- SAF150E6
- SAF250E6
- SAF350E6
- SAF500E6
- SAF650E6
- SAF800E6
- SAF1000E6




## Energy Performance of Building Directive - EPBD

EPBD limit the amount of electrical/gas power to be used to provide heating or cooling in commercial buildings. Therefore the building designer needs to select energy efficient heating/cooling equipment, and to minimise energy losses through ventilation systems.

The SAF recovers heat energy which would otherwise be exhausted to atmosphere, and uses this energy to warm the air entering the building. The reverse happens in warmer climates, where the exhausted cool air is used to partially cool the incoming air.


Capturing this waste energy, means the heating/ cooling requirements of the building are reduced, so smaller size plant can be selected, savings can be made in long term energy consumption, and carbon emissions are reduced.

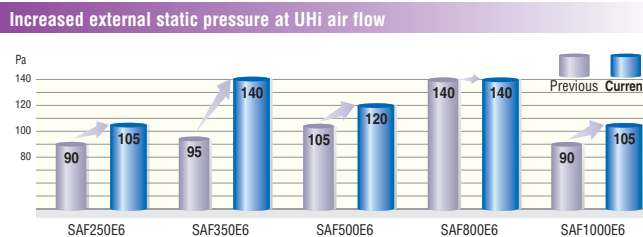


## Specifications

Item	Model	SAF150E6	SAF250E6	SAF350E6	SAF500E6	SAF650E6	SAF800E6	SAF1000E6			
Power source		1 Phase 220-240V, 50Hz									
Exterior dimensions Height x Width x Depth	mm	270x970x467	270x882x599	317x1050x804	317x1090x904	388x1204x884	388x1322x884	388x1322x1134			
Exterior appearance		Galvanized steel sheet									
Power input	W	92-107	108-123	178-185	204-225	269-295	360-378	416-432			
Running current	A	0.42-0.45	0.49-0.51	0.81-0.77	0.93-0.94	1.22-1.23	1.64-1.58	1.89-1.80			
Capacity	UHi	Enthalpy exchange efficiency	%	Cooling	63	63	66	62	62	65	65
		Heating		70	70	69	67	68	71	71	
		Temperature exchange efficiency		75							
	Hi	Enthalpy exchange efficiency	Cooling	63	63	66	62	62	65	65	
		Heating	70	70	69	67	68	71	71		
		Temperature exchange efficiency	75								
	Lo	Enthalpy exchange efficiency	Cooling	66	65	71	64	66	68	70	
		Heating	73	72	73	69	73	74	76		
		Temperature exchange efficiency	77	77	78	76	79	76	79		
Motor & Q'ty	W	20 x 2	20 x 2	40 x 2	70 x 2	100 x 2	180 x 2	180 x 2			
Air handling equipment Fan type & Q'ty		Sirocco fan x 2									
Air flow	UHi	150	250	350	500	650	800	1000			
	Hi	150	250	350	500	650	800	1000			
	Lo	120	190	240	440	460	630	700			
External static pressure	UHi	80	105	140	120	65	140	105			
	Hi	70	95	60	60	40	110	80			
	Lo	25	45	45	35	40	55	75			
Net weight	kg	25	29	49	57	68	71	83			
Remote control		Included									
Air filter	Supply air Exhaust air	Protection for element (Washable) PS400									


Structure (SAF800E6)

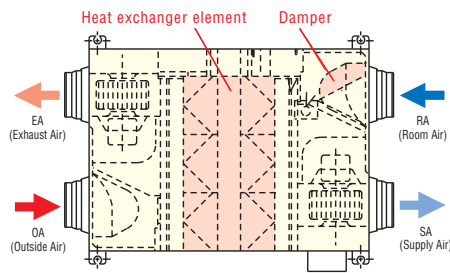

Principle of operation (simple ventilation)

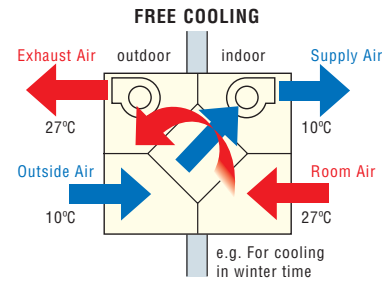


Principle of operation (heat exchanging)

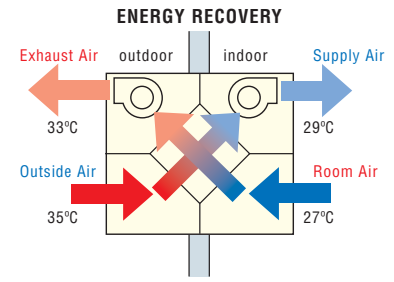

## Dimensions

All measurements in mm.

SAF150E6, SAF250E6, SAF350E6, SAF500E6

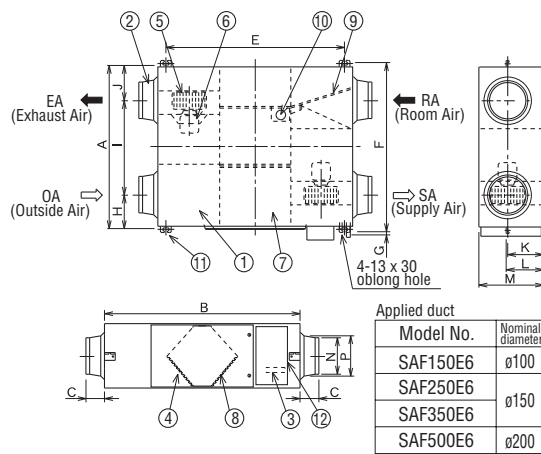


Model No.	Nominal diameter
SAF150E6	ø100
SAF250E6	ø150
SAF350E6	ø200
SAF500E6	ø250

Dimension table

Model	A	B	C	E	F	G	H	I	J	K	L	M	N	P
SAF150E6	467	970	49	810	525	19	82	303	82	135	159	270	ø98	ø110
SAF250E6	599	882	95	655	142		315	142	159	270	ø144	ø164		
SAF350E6	804	1050	70	978	860		112	580	112	159	182	317	ø194	ø210
SAF500E6	904	1090	1018	960	132		640	132						

SAF650E6, SAF800E6, SAF1000E6

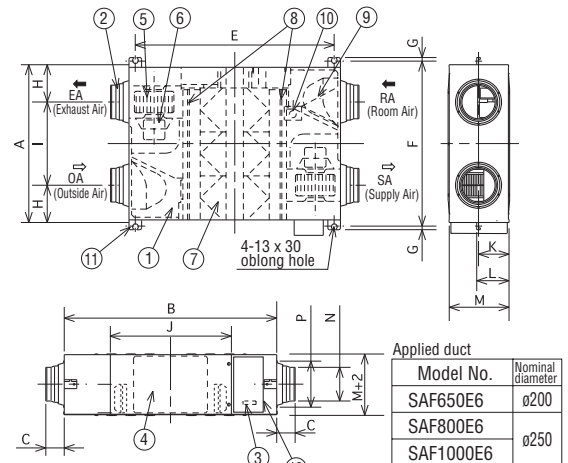

Model No.	Nominal diameter
SAF650E6	ø200
SAF800E6	ø250
SAF1000E6	ø300


Dimension table

Model	A	B	C	E	F	G	H	I	J	K	L	M	N	P
SAF650E6	884	1204	70	1132	940	19	132	620	560	194	218	388	ø194	ø210
SAF800E6		1322	85	1250	1190		228	428	612				ø242	ø258
SAF1000E6	1134													

NO.	Name	Qt'y
①	Frame	1
②	Adaptor	4
③	Terminal board	1
④	Inspection Cover	1
⑤	Fan	2 ※
⑥	Motor	2 ※
⑦	Heat Exchange Element	
	SAF150E6	1
	SAF250E6	1
	SAF350E6	2
	SAF500E6	2
	SAF650E6	3
SAF800E6	3	
SAF1000E6	4	
⑧	Filter	2
⑨	Damper	1
⑩	Damper Motor	1
⑪	Suspension fitting	4
⑫	Electrical components box	1

※Model SAF350E6, SAF500E6 and SAF600E6 have different fan and motor locations.

### Installation reference

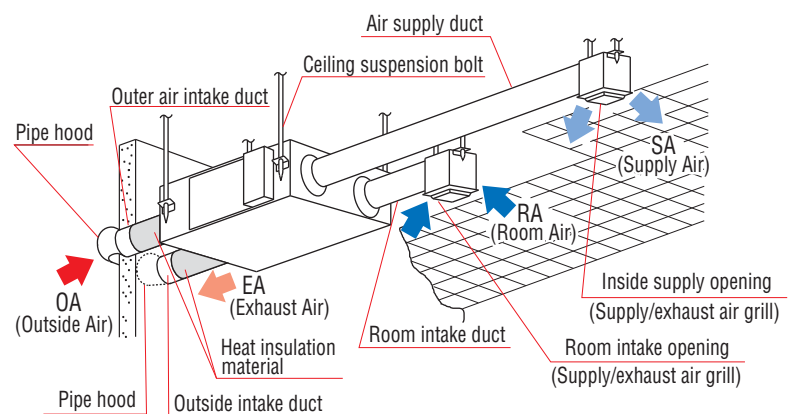

Note: An inspection port is needed for cleaning the heat exchanger and filter 1 or 2 times a year.



# Fresh Air DX Assembly


## Model No.

- SAF-DX250E6
- SAF-DX350E6
- SAF-DX500E6
- SAF-DX800E6
- SAF-DX1000E6



**Drain up kit (option, built-in type)**  
(600mm)

**DXA-DU-E**



**Remote control (option)**

Wired



**RC-E5**


**RCH-E3**

Wireless



**RCN-KIT3-E**

- SAF-DX is a heating or cooling coil incorporating MHI KXZ series controls. It can be used in combination with our SAF series of total heat exchanger.
- Combination of SAF-DX together with other indoor units is possible. The capacity code index of each model is shown below and must be used when making the system selection. Total capacity code index must be within 100% of outdoor unit capacity code index.
- Remote control option is the same as with other indoor units (see above). Connection to all Superlink controls is also possible.
- Optional condensate lift mechanism is also available (600mm height).
- Return air temp. control or supply air temp. control can be selectable.

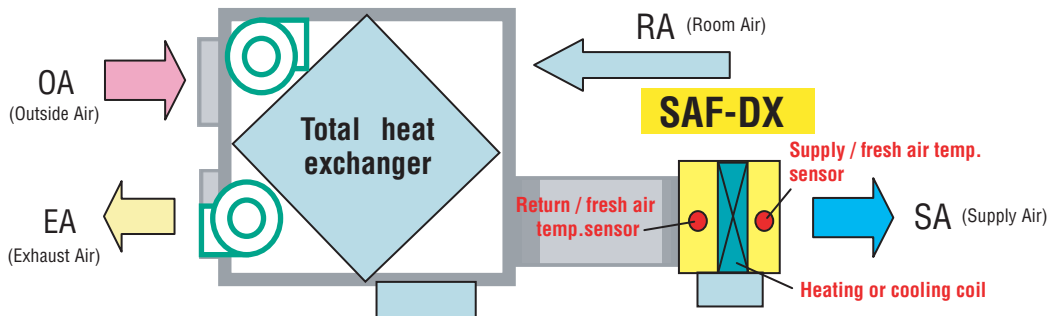

SAF-DX can provide heating or cooling to the fresh air supplied through a 3rd party air handling unit or total heat exchanger such as our SAF series.

## Specifications

Item	Model	SAF-DX250E6	SAF-DX350E6	SAF-DX500E6	SAF-DX800E6	SAF-DX1000E6
Nominal cooling capacity *1	kW	2.0	2.8	3.6	5.6	6.3
Nominal heating capacity *2	kW	1.8	2.2	2.8	4.5	5.6
Capacity code		22	28	36	56	71
Power source		1 Phase 220-240V, 50Hz				
Power consumption	Cooling	7.2-7.2				
	Heating	7.2-7.2				
Running current	Cooling	0.05-0.05				
	Heating	0.05-0.05				
Exterior dimensions H x W x D	mm	315 x 452 x 422		315 x 537 x 422	315 x 682 x 422	315 x 822 x 422
Net weight	kg	12.3		13.6	16.1	18.4
Air flow (Standard)	CMH	250	350	500	800	1000
Internal resistance	Pa	38			66	
Remote control(option)		wired: RC-E5, RCH-E3 wireless: RCN-KIT3-E				
Installation data	mm(in)	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")		Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")		Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")

(1) The data are measured at the following conditions.

Item	Return/fresh air temperature		Outdoor air temperature		Standards
	DB	WB	DB	WB	
Cooling *1	27°C	19°C	35°C	24°C	ISO-T1
Heating *2	20°C		7°C	6°C	

(2) This air-conditioner is manufactured and tested in conformity with ISO-T1 "UNITARY AIR-CONDITIONERS".





# Dimensions

All measurements in mm.

## SAF-DX250E6,350E6

Symbol	Content
A	Gas piping $\phi 9.52$ (3/8") (Flare)
B	Liquid piping $\phi 6.35$ (1/4") (Flare)
C	Drain piping R1
D	Hole for power source line
E	Wiring hole for total enthalpy heat exchanger
F	Hole for communication line
G	Suspension bolts M10





Space for installatin and service

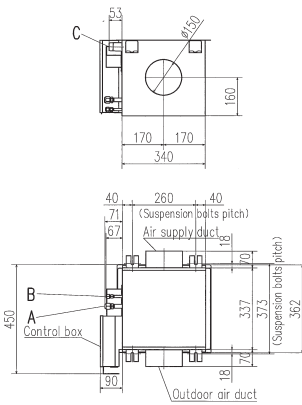

## SAF-DX500E6

Symbol	Content
A	Gas piping $\phi 12.7$ (1/2") (Flare)
B	Liquid piping $\phi 6.35$ (1/4") (Flare)
C	Drain piping R1
D	Hole for power source line
E	Wiring hole for total enthalpy heat exchanger
F	Hole for communication line
G	Suspension bolts M10





Space for installatin and service

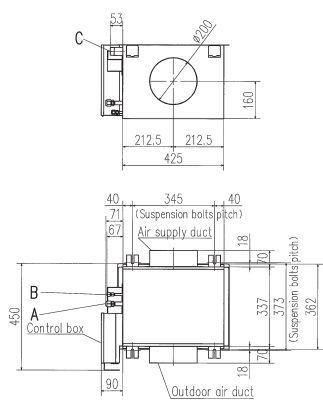

## SAF-DX800E6

Symbol	Content
A	Gas piping $\phi 12.7$ (1/2") (Flare)
B	Liquid piping $\phi 6.35$ (1/4") (Flare)
C	Drain piping R1
D	Hole for power source line
E	Wiring hole for total enthalpy heat exchanger
F	Hole for communication line
G	Suspension bolts M10





Space for installatin and service

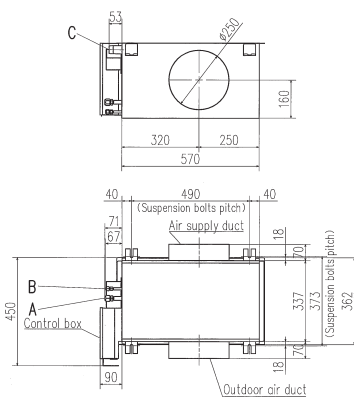

## SAF-DX1000E6

Symbol	Content
A	Gas piping $\phi 15.88$ (5/8") (Flare)
B	Liquid piping $\phi 9.52$ (3/8") (Flare)
C	Drain piping R1
D	Hole for power source line
E	Wiring hole for total enthalpy heat exchanger
F	Hole for communication line
G	Suspension bolts M10


Space for installatin and service

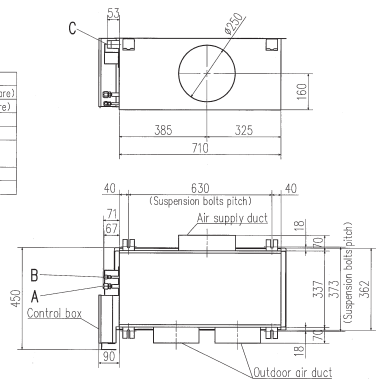




# EEV-KIT

- EEV-KIT is a control kit for operating a locally provided AHU and/or fan coil units with direct expansion heat exchanger coils in connection with KXZ system.
- EEV-KIT is composed of, EEV-Control ASSY and EEV-Set.

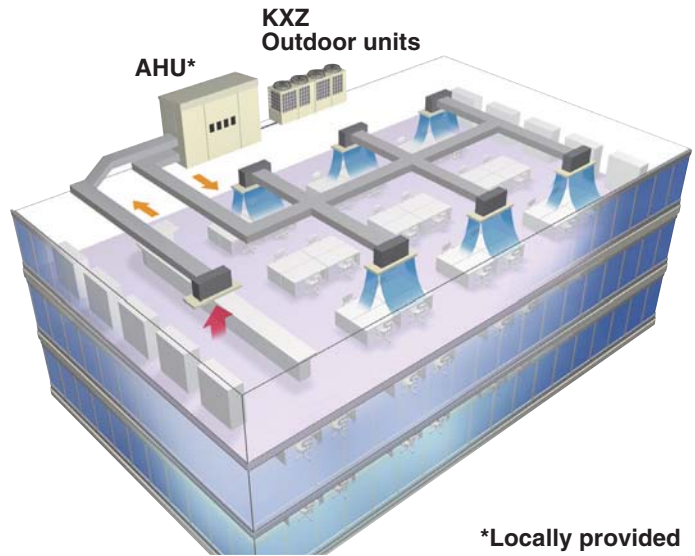

\*Locally provided

## Features

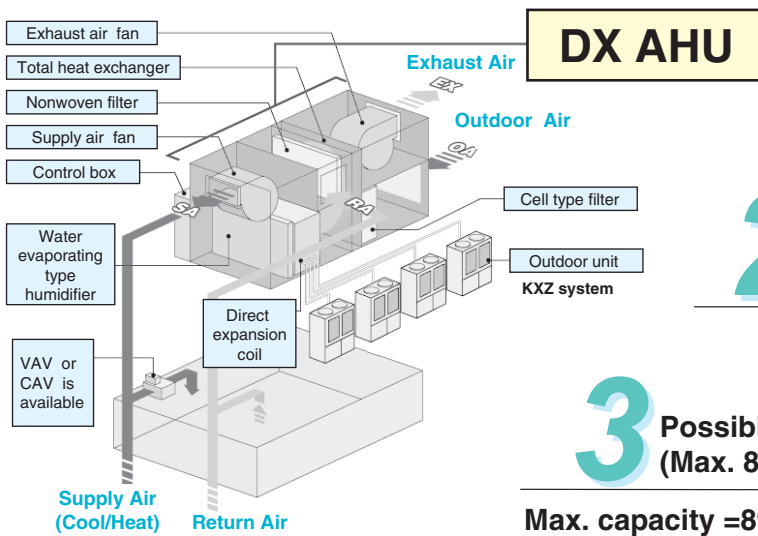


**1** Applicable to air cooled type heat pump outdoor unit for heat source

**2** Applicable to direct expansion coils for heat exchanger in the AHU

**3** Possible to connect KXZ systems (Max. 8 systems) to one air handling unit

Max. capacity = 896kW (112kW × 8): cooling capacity

- EEV-KIT uses controlling technology of KXZ.
- Therefore can be connect to superlink system.
- A remote controller for KXZ can be used.
- Operation command to indoor fan motors is sent from EEV-KIT.
- Switching between return air temperature control and supply air temperature control can be done.

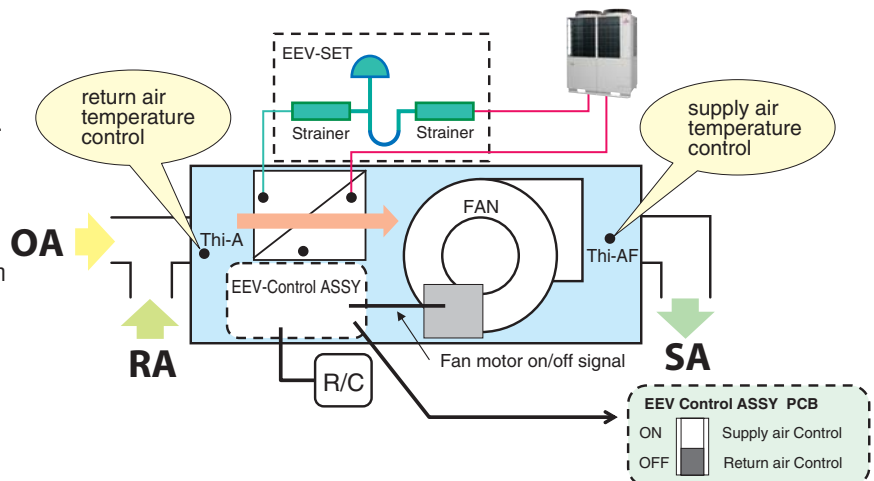

# Contents

•EEV-Control ASSY: Following 2 types

Refrigeration system	EEV-Control ASSY	
	EEVKIT6-E-M	EEVKIT6-E-C
Single		1 box-Many boxes
Multi	1 box (for master)	Many boxes (for slave)

•EEV-Set: Select from following 3 types according to coil capacity


Type	EEV6-71-E	EEV6-160-E	EEV6-280-E
Capacity	22 - 71	90 - 160	224 - 280

## Concept of System


### <Advantages>

- Easy Installation
- Space saving installation
- Low construction cost
- Easy operation & Maintenance
- High efficiency & Performance

DX AHU : Direct Expansion Air handling unit equipped with the direct expansion coil

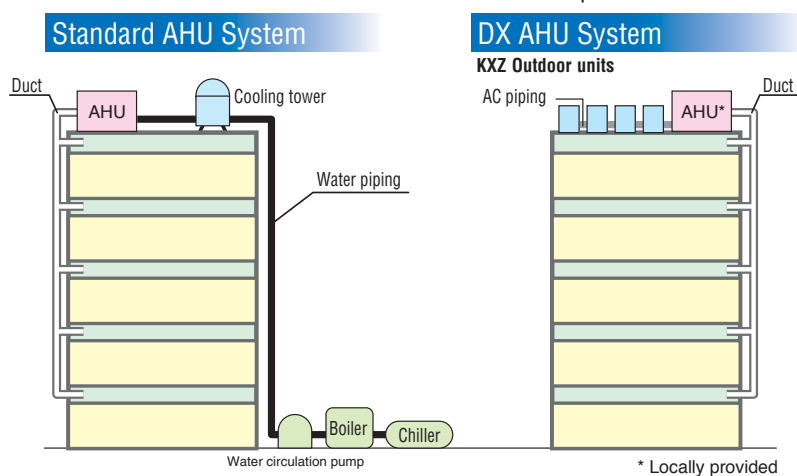

## Control system SUPERLINK II

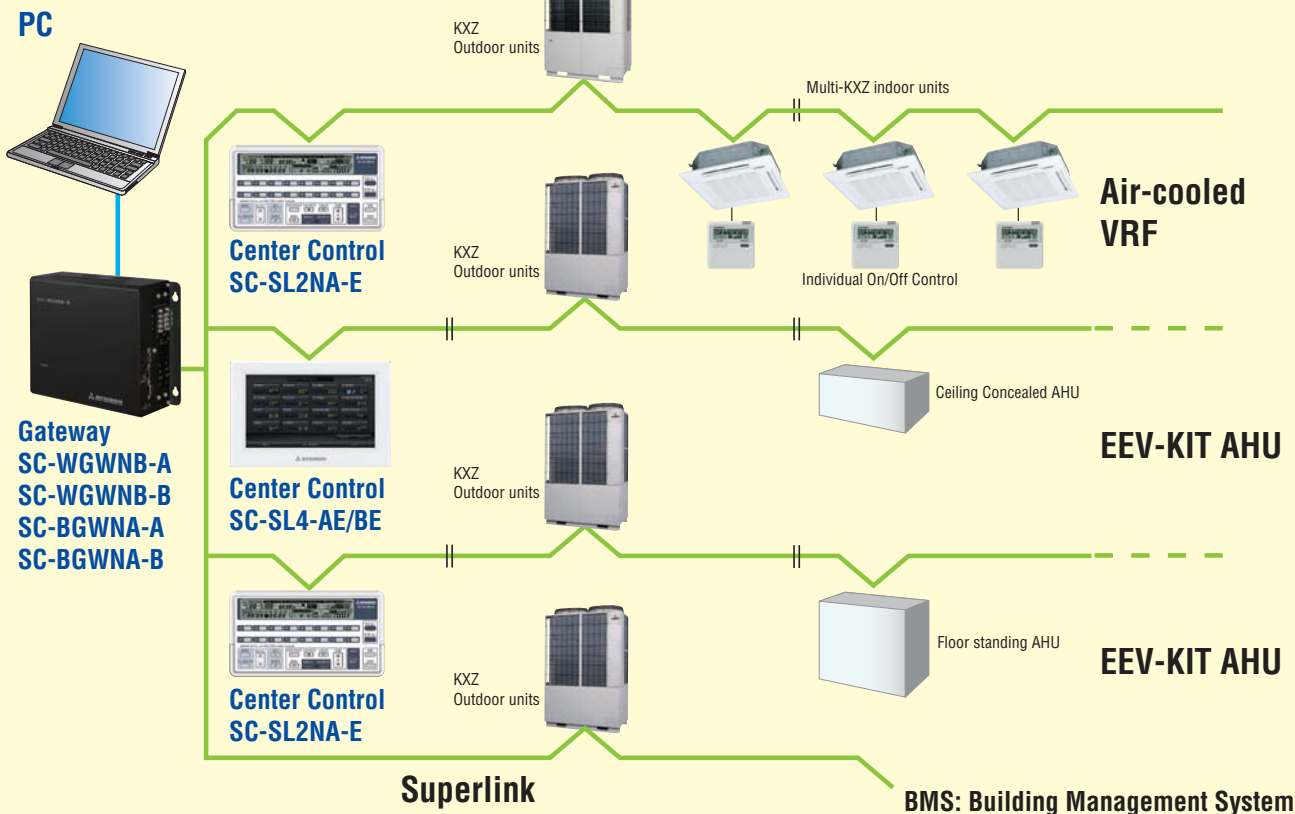





## Simple setting **REMOTE CONTROL**

Advanced touch screen panel with full dot Liquid Crystal display

### User friendly

- LCD panel with light tap operation introduced as the industry's first
- Simple interface with only three buttons

### High level of visibility

- Big LCD with 3.8 inch full dot display
- Back light function
- Multi language display (9 languages)

**RC-EX1A**



**Run / Stop**

### High power operation

The highest capacity operation (Max 15 minutes)

- Increasing compressor speed
- Increasing air flow volume


### Energy-saving operation

- Changes set temperature.  
At 28°C in cooling mode and 22°C in heating mode, 25°C in auto mode.
- Operation correction by outdoor temperature


**Simple setting by tapping button only**

# 1. Basic operation

All settings done by tapping touch screen panel

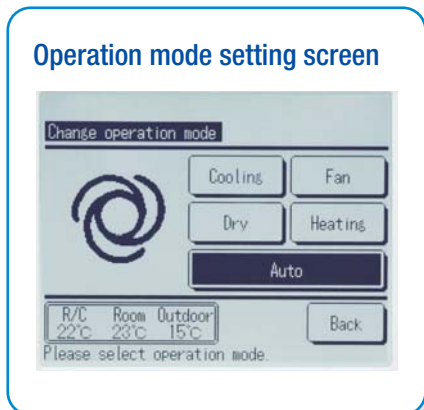

The desired operation mode can be selected by simply tapping this button.

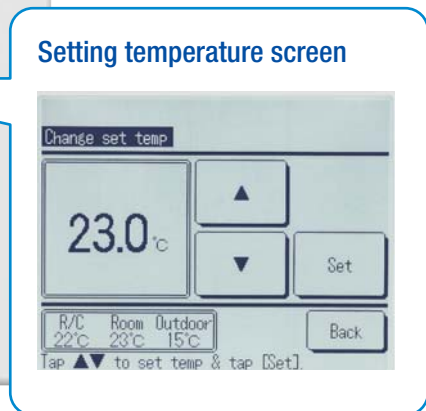

You can select the temperature as desired by tapping ▲▼ button.

**Operation mode**

- Cooling
- Fan
- Dry
- Heating
- Auto

# 2. Main functions

## Saving energy

- Sleep timer
- Peak cut timer
- Automatic temperature set back
- Weekly timer
- Set ON/OFF timer by hour
- Set ON/OFF timer by clock

## Comfort

- Individual flap control
- High power operation
- External ventilation ON/OFF
- Warming up operation
- Automatic fan speed
- Temperature increment setting by 0.5°C

## Convenience


- LCD contrast setting
- Back light setting
- Filter sign
- Control sound
- Outdoor silent mode
- Summer time setting
- Home leave mode
- Indoor & outdoor temperature display
- Heating standby display
- Defrosting operation display
- Auto cooling/heating display
- °C/°F display
- Administrator settings
- Room name setting

## Service

- Error code display
- Operation data display
- Next service date display
- Contact company display
- USB connection (mini-B)

## Remote control RC-EX1A Series Utility Software

By connecting this system to the Remote Control, the Remote Control can be operated from PC.

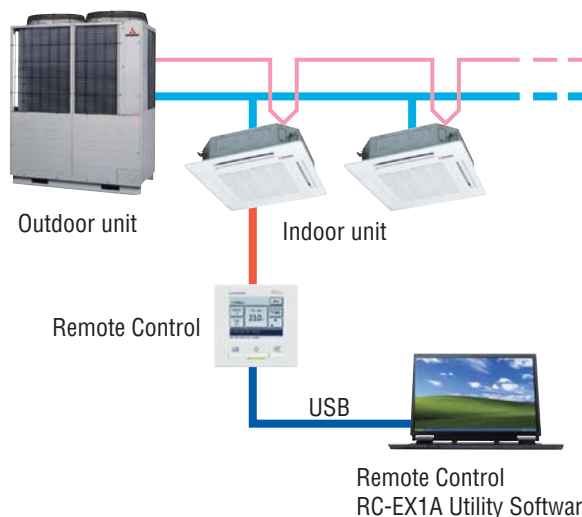



# Control Systems

## <Individual control>

### Remote Control line up (except SAF)

	indoor unit	remote control		indoor unit	remote control	indoor unit	remote control	indoor unit	remote control
wired	all models	RC-EX1A	wireless	FDT	RCN-T-36W-E	FDT5	RCN-TS-E	FDE	RCN-E-E
		RC-E5		FDTC	RCN-TC-24W-ER	FDK22~56	RCN-K-E	FDFW	RCN-FW-E
		RCH-E3		FDTW	RCN-TW-E	FDK71	RCN-K71-E	others*	RCN-KIT3-E

\*FDTQ, FDU, FDUW, FDUU, FDUH, FDU-F

### Wired remote control with weekly timer (option)

#### RC-E5



The RC-E5 controller enables extensive access to service and maintenance technical data combined with easy to use functions and a clear LCD display.

#### Run hour meters to facilitate maintenance checking

RC-E5 stores operation data when an anomaly occurs and indicates the error on the LCD. It also displays cumulative operation hours of the air conditioner and compressor since commissioning.

#### Room temperature controlled by the remote control sensor


The temperature sensor is housed in the top section of the remote control unit. This arrangement has improved the sensitivity of the remote control unit's sensor, which permits more finely controlled air conditioning.



#### Weekly timer function as standard

RC-E5 provides (as a standard feature) a weekly timer, which allows one-week operation schedules to be registered. A user can specify up to four times a day to start/stop the air conditioner. (Temperature setting is also possible with the timer).

#### Timer operation



#### Changeable set temperature ranges

RC-E5 allows the upper and lower limits of a set temperature range to be specified separately. By adjusting a set temperature range, you can ensure energy saving air conditioning by avoiding excessive cooling or heating.

Changeable range	
Upper limit	20~30°C(effective for heating operation)
Lower limit	18~26°C(effective for non-heating operation)

### Simple remote control (option)

#### RCH-E3 (wired)



Considering specialized usage in hotel rooms, control buttons are limited only to minimum required functions such as ON/OFF, mode, temperature setting and fan speed. It is really simple and easy to use.

#### Up to 16 units

It can control up to 16 units individually, with pressing the AIR CON No. button.

#### AUTO restart

This function allows starting the air conditioner automatically when power supply is restored after power failure or by turning on the power switch.

\* RCH-E3 is not applicable to the Individual flap control system and the Flap control system.  
\* When RCH-E3 is used, the fan speed setting can only be set to 3 speed settings (Hi-Me-Lo).

### Thermistor (option)

#### SC-THB-E3

In case sensor in the indoor units or the remote control sensor can not sense the room temperature correctly, or individual remote control in each room is not required but only sensor is required (as when center control system is in place), install SC-THB-E3 at proper place in the rooms.



8m

### Wireless remote control (option)

For wireless control simply insert the infra-red receiver kit on a corner of the panel

RCN-T-36W-E,  
RCN-TC-24W-ER



RCN-TW-E



RCN-TS-E



RCN-K-E,  
RCN-K71-E



RCN-E-E



RCN-FW-E



RCN-KIT3-E




\*The wireless remote control is not applicable to the Individual flap control system and the Flap control system.  
\*When the wireless remote control is used, the fan speed setting can only be set to 3 speed settings (Hi-Me-Lo).

# <Control System> SUPERLINK-II

MHI has now combined simplicity of installation with our highly sophisticated Superlink-II control system, to offer building owners and occupiers a comprehensive control and management system, while providing complete commissioning and service maintenance assistance for installers and service engineers. The Superlink-II network utilises two wire, non-polar cable - for further details of wiring.

Superlink-II is an advanced high speed data transmission system that can connect up to 128 indoor units and 32 outdoor units as a network. MHI offers a wide range of control options for the Superlink-II network to suit any application large or small, as well as connection to new or existing building management systems. Individual MHI split systems can also be integrated on to the Superlink-II network using SC-ADNA-E.

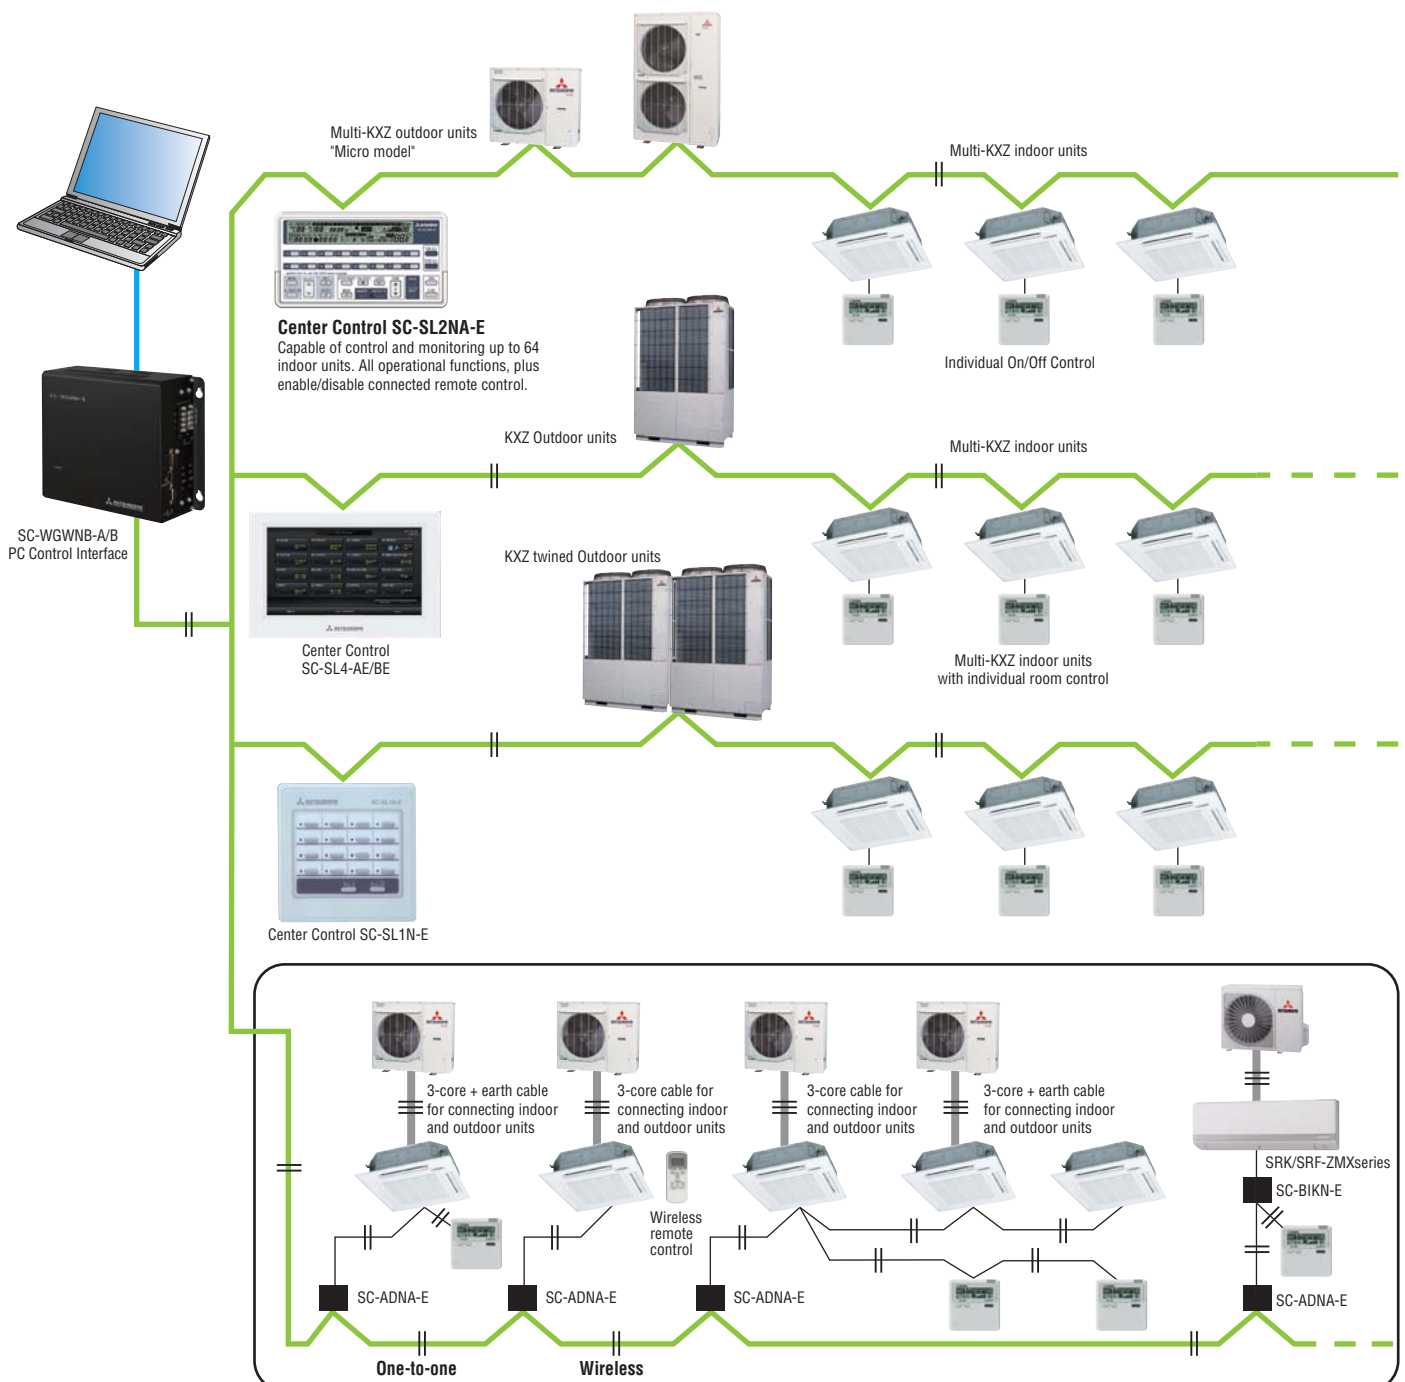



# <Central Control>

## SC-SL1N-E

Start/stop control of up to 16 indoor units either individually or collectively.

Simple centralised control.


1. The SC-SL1N-E is connected to the Superlink-II network via 2-core, non-polar wires ('AB' connection).
2. It will monitor and control the start/stop function of up to 16 units, with the sixteen operation button.
3. The unit or group numbers in operation or in need of service are displayed with an LED.
4. Collective start/stop is also available through the simultaneous on/off button.
5. Up to 12 SC-SL1N-E units can be connected to a Superlink-II network (consisting of up to 128 indoor units).
6. If a power failure occurs, the SC-SL1N-E will resume the operation of the system according to a stored operation condition, once power is restored.




## SC-SL2NA-E

Central control of up to 64 indoor units including weekly timer function as standard.

1. The SC-SL2NA-E is connected to the Superlink-II network via 2-core, non-polar wires ('AB' connection).
2. It will monitor and control the start/stop function of up to 16 units, or 16 groups of units, with the sixteen operation buttons.
3. It also monitors and controls the following functions for individual units, groups of units or the complete network: operation mode, set point temperature, return air temperature, louvre position, error code. Air flow and center lock function.
4. The unit or group numbers in operation or in need of service are displayed with an LCD.
5. Collective start/stop is also available through the simultaneous on/off button.
6. If a power failure occurs, the SC-SL2NA-E will resume the operation of the system according to a stored operation condition, once power is restored.
7. The SC-SL2NA-E can be connected to an external timer to facilitate timed on/off cycles.
8. The number of units connected to one network are detailed on the table below.

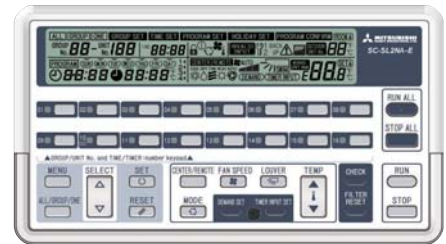

### Example of control by a centre control SC-SL2NA-E

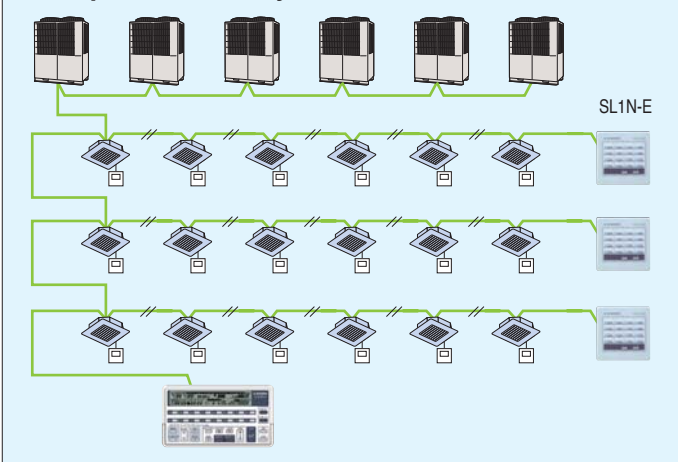

An SC-SL2NA-E performs the start/stop control, monitoring and mode setting of up to 64 units. It is a high quality air conditioner control system that allows up to 64 indoor units to be freely grouped into 1 to 16 groups.


It allows not only the start/stop control but also the monitoring, display of operation statuses such as in operation or in need of service and mode setting such as switching of operation modes of connected units collectively, by group or individually.

• Outer dimensions: H120 x W215 x D25+35\* mm.

35\* is the measurement including the part contained in a recess.

### SC-GIFN-E Interface kit

- Applicable products  
Ventilation fan, Air purifier
- By using SC-GIFN-E together with central control such as SC-SL1N-E, SC-SL2NA-E and SC-SL4-AE/BE, you can start-stop, operate & monitor the operation of applicable products.

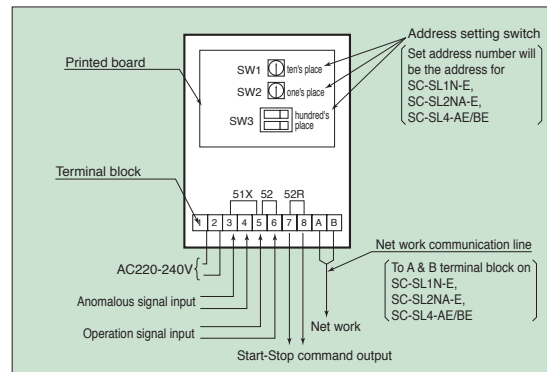

**Note:**Please consult dealer for combination of center controls and BMS interface units.




# SC-SL4-AE/BE

MHI introduces the full colour touch screen central control SC-SL4-AE/BE, with 9 inch interactive LCD display. Offers control, monitoring, scheduling and service/maintenance functions for up to 128 indoor units. Control with PC is available by use of internet explorer.



Indoor units can be controlled, scheduled, monitored and either individually, as groups or as blocks of groups with the following functions:

Control	Monitoring	Scheduling	Administration/Service
Run/Stop	Operating state	Yearly schedule	Block definition
Mode (cool/heat/fan/dry/Auto)	Mode	Today's schedule	Group definition
Set temperature	Set temperature	Detailed daily schedule	Unit definition
Operation permitted/prohibited	Room temperature		Time and date setting
Fan speeds	Operation permitted/prohibited		Alarm history
Air direction	Fan speed		Energy consumption calculation period
Filter sign reset	Air direction		Energy consumption, cumulative operation time
Demand control (3 steps)	Filter sign		
Emergency stop	Maintenance (1, 2 or back-up)		

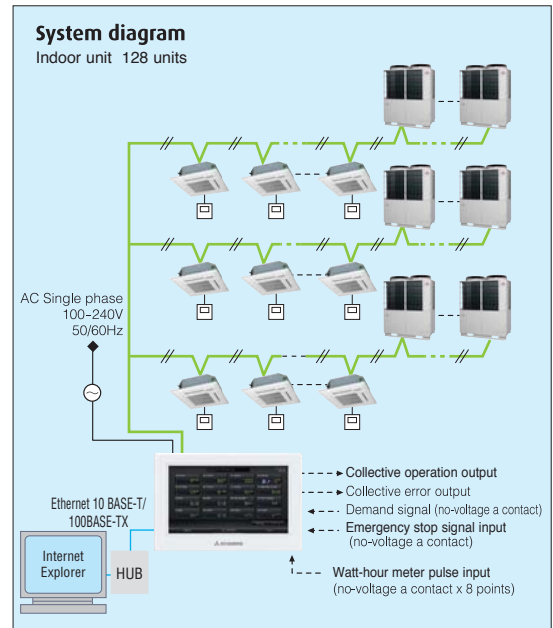

PC requirements: Windows Vista or Windows 7, 8.1  
 Monitor resolution 1280 x 1024 or more.  
 Web browser requirements: Internet Explorer 8, 9, 11

## Electric power calculation function:

(for SC-SL4-BE only)

SC-SL4-BE gives outputs as "electric power consumption kWh data -each indoor unit, each group, each SUPERLINK-II system and each power pulse system-".



	SC-SL4-BE
Method of data export	USB / LAN
Calculation software	Standard
Watt-hour meter pulse input (Maximum)	8
Connecting indoor units number (Maximum)	128

Item	Model	SC-SL4-AE/SC-SL4-BE
Ambient temperature during use		0 ~ 40°C
Power supply		1 Phase 100-240V 50/60Hz
Power consumption		9W
External dimensions (Height x Width x Depth)		172mm x 250mm x 23 (+70) mm
Net weight		2.0kg
Number of connectable units (indoor units)		up to 128 units
LCD touch panel		Colour LCD, 9 inches wide
Inputs	SL (Superlink) signal inputs	1 system (Super link-II)
	Watt-hour meter pulse input*	8-point, pulse width 80ms or more
	Emergency stop signal input*	1 point, non-voltage a contact input continuous input (closed, forced stop)
	Demand signal input*	2 point, non-voltage a contact input continuous input (closed, demand control)
Outputs	Operation output	1 point, maximum rated current 40mA, DC24 V During full stop; Open. If even one unit is operating; Closed All units stop; Open, any unit operating; Close
	Error output	1 point maximum rated current 40mA, DC24 V Normal; closed. If even one unit is abnormal; Open

\* The receiving side power supply is DC 12V (10mA).  
 The air conditioning charges calculations of this unit are based on OIML, the international standard.





## <PC windows central control>

### SC-WGWNB256-A/B, SC-WGWNB-A/B (Web gateway)



Production by order

(SC-WGWNB256-B/WGWNB-B are with electric power calculation function)

Control and monitoring of up to 256 cells (some cells can have two or more indoor units and total number of indoor units can be up to 256 units) centralised to a network PC using the Superlink-II web gateway. Simple installation is assured with no special software requirements, operation is via Internet Explorer. A low power embedded CPU and compact flash ROM ensure a large storage capacity with high reliability (no moving parts such as a PC fan, etc). An IP address filter function combined with three-level user authentication check also ensures security.



Additional engineering service cost etc. is required. Please consult your dealer when using this central control.

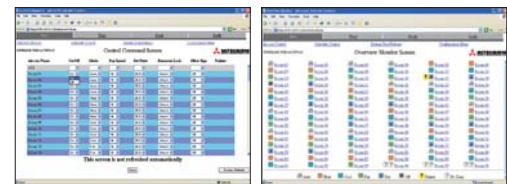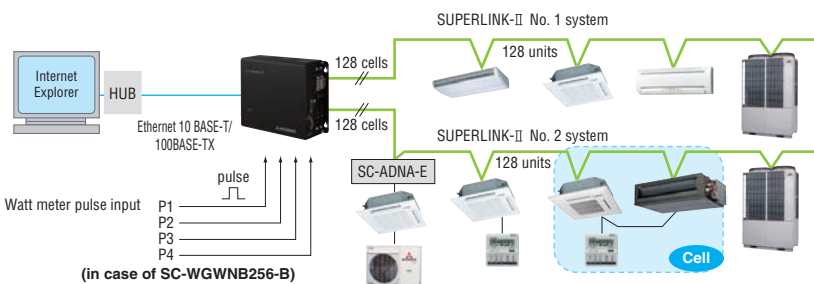

PC requirements: Windows XP or Windows Vista or Windows 7. Monitor resolution 1024 x 768.

## <BMS interface unit>

### SC-BGWNA256-A/B, SC-BGWNA-A/B (BACnet gateway)


Production by order

(SC-BGWNA256-B/BGWNA-B are with electric power calculation function)

SC-BGWNA256-A/B, SC-BGWNA-A/B are interface devices that convert MHI's Superlink-II communication data to BACnet code. In case of SC-BGWNA256-A/B, up to 256 cells (some cells can have two or more indoor units and total number of indoor units can be up to 256 units) are controlled centrally from a BMS.



Additional engineering service cost etc. is required. In case of SC-BGWNA256-B/SC-BGWNA-B, communication test by qualified person regarding electric cost calculation function is required before commissioning. Please consult your dealer when using this gateway.

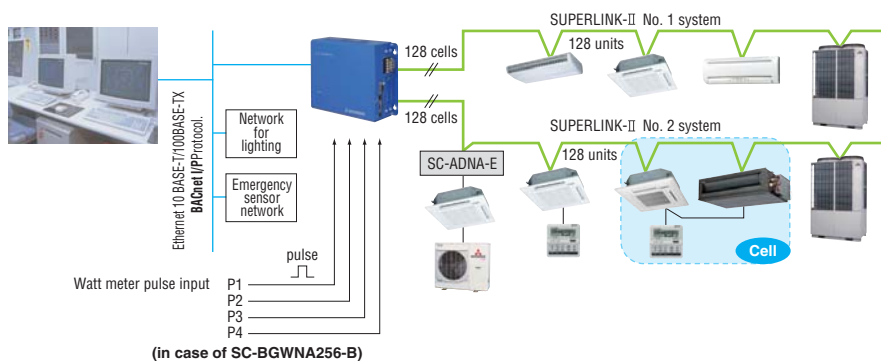


## SC-LGWNA-A (LonWorks gateway)

Production by order

SC-LGWNA-A is an interface device that converts MHI's Superlink-II communication data to LonWorks code. Control and monitoring functions of the a/c system for up to 96 indoor units can be integrated to a central control point via the building management system network.



Additional engineering service cost etc. is required. Please consult your dealer when using this gateway.

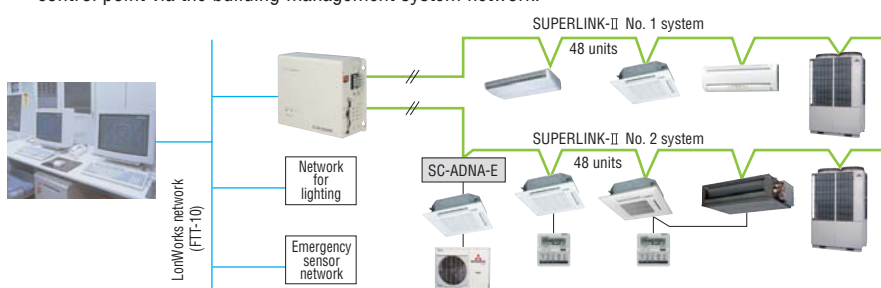

# KXZ Service/maintenance and monitoring


The design of the outdoor units separates the air flow compartment from the mechanical compartment, allowing easy access to serviceable parts by simply removing the panel.

This design also means that the base plate of the air flow compartment acts as a drain tray connected to a drain pipe that runs through the mechanical compartment, so a simple connection of a drain hose to the base of the unit is all that is required, no need for a separate drain tray to be installed.

Service maintenance and trouble shooting tasks can be carried out easily via the wired remote controller, as well as a cooling test operation to assist commissioning.

The outdoor unit control box is also equipped with a switch to invoke a 'test-run' mode. This function can be used to help detect any installation errors, indoor/outdoor unit matching errors, EEV and valve operation. A 'pump-down' switch on the PCB allows refrigerant to be recovered with the compressor protected.

All outdoor unit PCBs are also equipped with a 7-segment digital display for detailed operation history and fault finding. Operation data is stored for the 30 minute period preceding a fault occurring and details are displayed on the 7-segment reading.

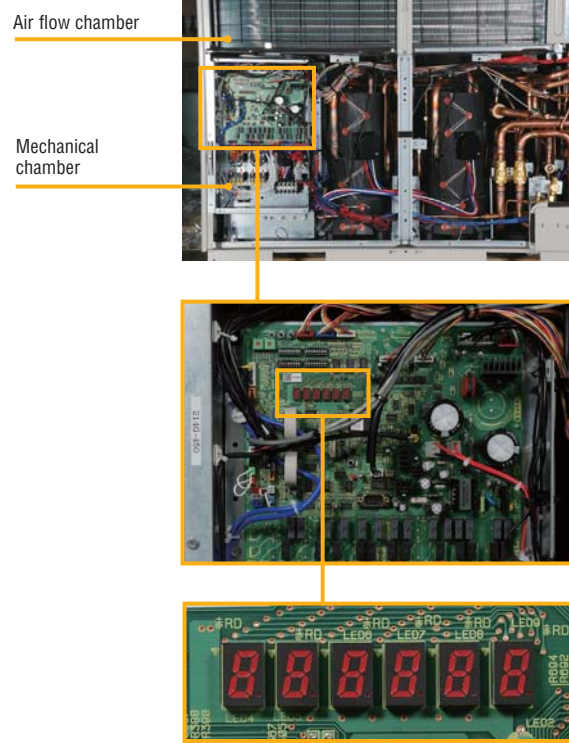

Outdoor unit PCB 7-segment display

## Automatically produced test-run report


**KXZ series operation data sheet (Outdoor unit)**

Customer name: trading company      Test run date : Aug. 7, 2003      Test run operator: Tetsu Mitsubishi  
 Delivery date : Jul. 25, 2003      Weather: cloudy


Order number	Unit No.	Model	Serial No.	Phase	Power	Current	Temp.	Pressure	Flow	Speed	Time	Mode	Test	Result	Remarks
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7
8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8
9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9
10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13
14	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14
15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15
16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16
17	17	17	17	17	17	17	17	17	17	17	17	17	17	17	17
18	18	18	18	18	18	18	18	18	18	18	18	18	18	18	18
19	19	19	19	19	19	19	19	19	19	19	19	19	19	19	19
20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21
22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22
23	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23
24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24
25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
26	26	26	26	26	26	26	26	26	26	26	26	26	26	26	26
27	27	27	27	27	27	27	27	27	27	27	27	27	27	27	27
28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28
29	29	29	29	29	29	29	29	29	29	29	29	29	29	29	29
30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30

Mitsubishi Heavy Industries      Sales Company


## Operation data storage during servicing

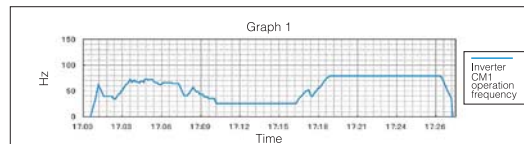

## Operation data storage when a fault occurs

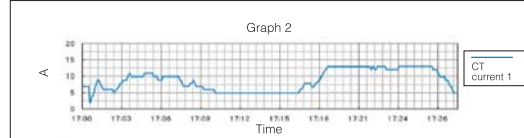

## Method of connecting Mente PC in the combination Multi system

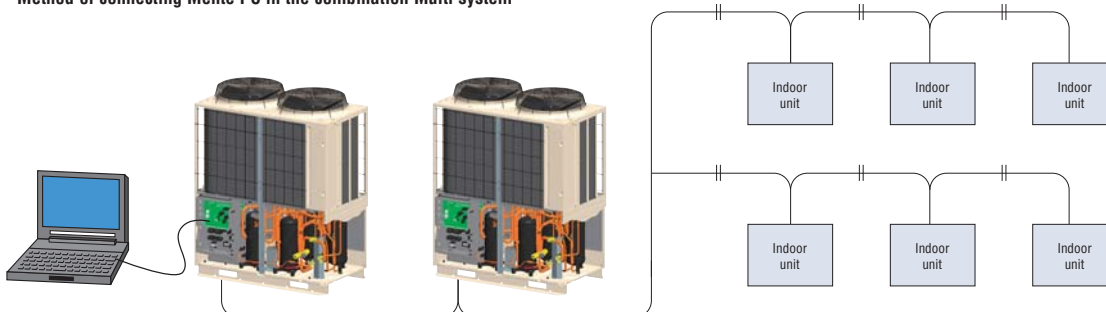

# INTESIS BMS Interface for MHI air conditioners

All technical support, including specifying work, compatibility issues, product quality (repair and replacement issues), product liability issues and the required after sales service (including spare parts supply) will be provided by Intesis as it is an Intesis product. Product sales and delivery will be conducted by Intesis as well. For details concerning such matters please directly contact Intesis.

## Integration of MHI VRF in your KNX installation by Superlink

**MH-AC-KNX-48**  
(Max 48 indoor units / Superlink I & II)  
**MH-AC-KNX-128**  
(Max 128 indoor units / Superlink II)




INTEGRATED GATEWAY

- Bidirectional: Supervision and Control
- Robust and reliable hardware
- Direct connection to KNX TP-1 BUS
- Independent management of communications
- Power supply: 230 VAC 50/60Hz
- Wall mounting case



TOUCH SCREEN

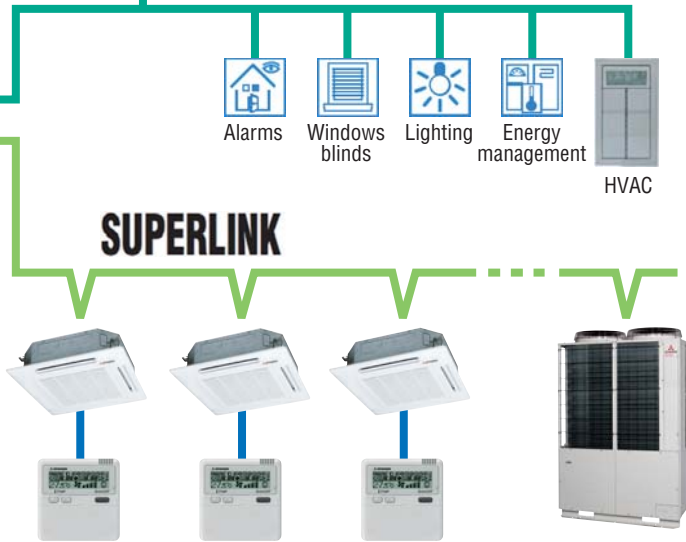

## Integration of MHI VRF in your Modbus installation by Superlink

**MH-AC-MBS-48**  
(Max 48 indoor units / Superlink I & II)  
**MH-AC-MBS-128**  
(Max 128 indoor units / Superlink II)




INTEGRATED GATEWAY

- Bidirectional: Supervision and Control
- Robust and reliable hardware
- Modbus TCP or Modbus RTU RS-485/RS-232
- Independent management of communications
- Power supply: 230 VAC 50/60Hz
- Wall mounting case



MODBUS

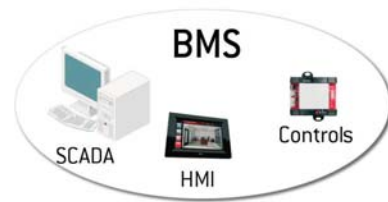

## Integration of MHI PAC in your KNX installation by Remote control line


### MH-RC-KNX-1i




**IntesisBox**

- Protocol : KNX TP-1 bus
- Dimension : 71 x 71 x 27 mm
- External Power supply : no need

Example :  
Device as Master

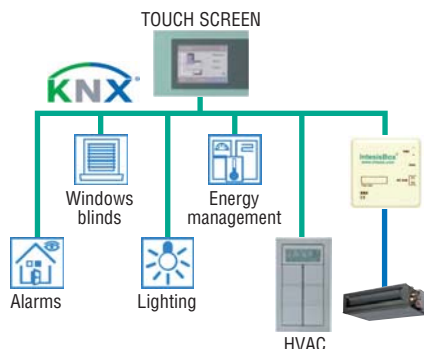

Example :  
Device as Slave

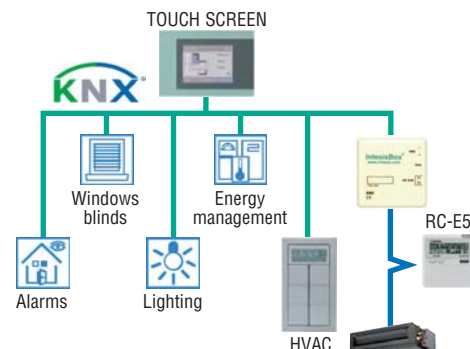

## Integration of MHI PAC in your Modbus installation by Remote control line


### MH-RC-MBS-1




**IntesisBox**

- Protocol : Modbus RTU (RS-485)
- Dimension : 93 x 53 x 58 mm
- External Power supply : no need

Example :  
Device as Master

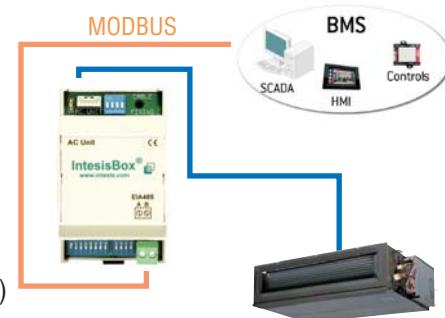

Example :  
Device as Slave

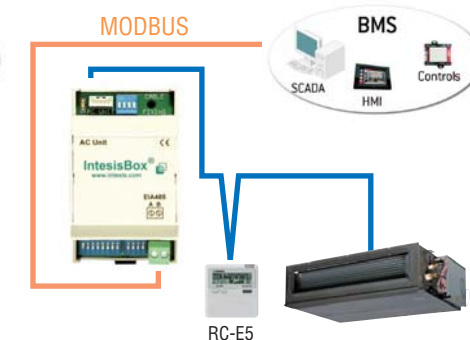

## Integration of MHI PAC in your EnOcean installation by Remote control line

### MH-RC-ENO-1i/1iC



**IntesisBox**

- Protocol : EnOcean  
1i : 868MHz@EU  
1iC : 315MHz@USA, ASIA
- Dimension : 100 x 70 x 28 mm
- External Power supply : no need

Example :  
Device as Master



Example :  
Device as Slave



Please access the followings for details.

**Intesis** software

URL | <http://www.intesis.com>  
email | [info@intesis.com](mailto:info@intesis.com)  
tel | +34 938047 134





# KXZ Outdoor units Standard large connection 10~34HP (28.0kW~95.0kW)

Model No.	Nominal Cooling Capacity
FDCL280KXZE1	28.0kW
FDCL335KXZE1	33.5kW
FDCL400KXZE1	40.0kW
FDCL450KXZE1	45.0kW
FDCL475KXZE1	47.5kW
FDCL500KXZE1	50.0kW
FDCL560KXZE1	56.0kW

Model No.	Nominal Cooling Capacity
FDCL615KXZE1 (FDCL280+FDCL335)	61.5kW
FDCL670KXZE1 (FDCL335+FDCL335)	67.0kW
FDCL735KXZE1 (FDCL335+FDCL400)	73.5kW
FDCL800KXZE1 (FDCL400+FDCL400)	80.0kW
FDCL850KXZE1 (FDCL400+FDCL450)	85.0kW
FDCL900KXZE1 (FDCL450+FDCL450)	90.0kW
FDCL950KXZE1 (FDCL475+FDCL475)	95.0kW

**NEW**

**Blue Fin**

**Blue Fin**

FDCL280KXZE1  
FDCL335KXZE1




FDCL400~560KXZE1



## Increased indoor unit connection capacity

This series can connect indoor unit capacity up to 160~200% from 130% of Standard series.


Standard series		Standard large connection series	
kW	capacity connection	kW	capacity connection
28.0~95.0	130%	28.0~45.0	200%
		47.5~95.0	160%

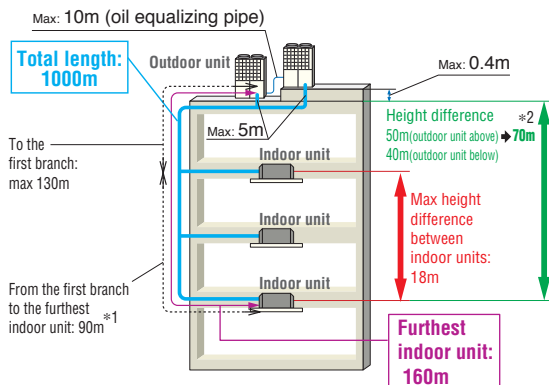

\*1 The difference between the longest and the shortest indoor unit piping from the first branch must be within 40m. (MAX85m)

\*2 In case of height difference up to 70m, please contact your dealer. Height difference up to 90m is possible with High Head series. Please refer to page 110.

## Range of operation

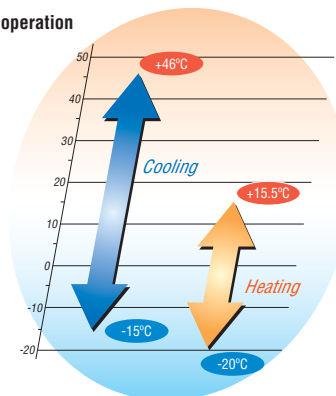

# Specifications

Item	Model	FDCL280KXZE1	FDCL335KXZE1	FDCL400KXZE1	FDCL450KXZE1	
Nominal horse power		10HP	12HP	14HP	16HP	
Power source		3Phase 380-415V, 50Hz				
Nominal capacity	Cooling	28.0	33.5	40.0	45.0	
	Heating	31.5	37.5	45.0	50.0	
Electrical characteristics	Starting current	A 8				
	Power consumption	Cooling	7.24	8.96	10.96	13.98
		Heating	7.28	9.04	10.69	12.50
	Running current	Cooling	11.9-10.9	14.6-13.4	17.5-16.2	22.4-20.5
Heating		12.0-11.0	14.8-13.5	17.5-16.2	20.4-18.7	
Exterior dimensions	H x W x D	mm 1690x1350x720		2048x1350x720		
Net weight		kg 280		325		
Refrigerant charge	R410A	kg 11.0		11.5		
Refrigerant piping size	Liquid line	mm(in) $\phi$ 9.52(3/8")				
	Gas line	$\phi$ 22.22(7/8")	$\phi$ 25.4(1") [ $\phi$ 22.22(7/8")]	$\phi$ 25.4(1") [ $\phi$ 28.58(1 1/8")]		
Capacity connection		% 200%				
Number of connectable indoor units		24	29	36	40	

Item	Model	FDCL475KXZE1	FDCL500KXZE1	FDCL560KXZE1	
Nominal horse power		17HP	18HP	20HP	
Power source		3Phase 380-415V, 50Hz			
Nominal capacity	Cooling	47.5	50.0	56.0	
	Heating	53.0	56.0	63.0	
Electrical characteristics	Starting current	A 8			
	Power consumption	Cooling	13.98	13.97	16.62
		Heating	13.00	13.49	15.95
	Running current	Cooling	22.6-20.7	22.6-20.7	26.9-24.6
Heating		21.0-19.2	21.8-20.0	25.8-23.6	
Exterior dimensions	H x W x D	mm 2048x1350x720			
Net weight		kg 378			
Refrigerant charge	R410A	kg 11.5			
Refrigerant piping size	Liquid line	mm(in) $\phi$ 12.7(1/2")			
	Gas line	$\phi$ 28.58(1 1/8")			
Capacity connection		% 160%			
Number of connectable indoor units		41	43	48	

\*Exterior dimension : Please refer to page 106.

Item	Model	FDCL615KXZE1	FDCL670KXZE1	FDCL735KXZE1	FDCL800KXZE1	FDCL850KXZE1	FDCL900KXZE1	FDCL950KXZE1	
Combination (FDC)		280KXZE1	335KXZE1	335KXZE1 *	400KXZE1	400KXZE1	450KXZE1	475KXZE1	
		335KXZE1	335KXZE1	400KXZE1	400KXZE1	450KXZE1	450KXZE1	475KXZE1	
Nominal horse power		22HP	24HP	26HP	28HP	30HP	32HP	34HP	
Power source		3Phase 380-415V, 50Hz							
Nominal capacity	Cooling	61.5	67.0	73.5	80.0	85.0	90.0	95.0	
	Heating	69.0	75.0	82.5	90.0	95.0	100.0	106.0	
Electrical characteristics	Starting current	A 10							
	Power consumption	Cooling	16.20	17.92	19.92	21.92	24.94	27.96	27.96
		Heating	16.32	18.08	19.73	21.38	23.19	25.00	26.00
	Running current	Cooling	26.5-24.3	29.2-26.8	32.1-29.6	35.0-32.4	39.9-36.7	44.8-41.0	45.2-41.4
Heating		26.8-24.5	29.6-27.0	32.3-29.7	35.0-32.4	37.9-34.9	40.8-37.4	42.0-38.4	
Exterior dimensions	H x W x D	mm 1690x2700x720			2048x2700x720				
Net weight		kg 560		605	650		756		
Refrigerant charge	R410A	kg 11.0x2		11.0+11.5	11.5x2				
Refrigerant piping size	Liquid line	mm(in) $\phi$ 12.7(1/2")			$\phi$ 15.88(5/8")				
	Gas line	$\phi$ 28.58(1 1/8")			$\phi$ 31.75(1 1/4") [ $\phi$ 34.92(1 3/8")]				
	Oil equalization	mm(in) $\phi$ 9.52(3/8")							
Capacity connection		% 160%							
Number of connectable indoor units		53	58	63	69	73	78	80	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.

2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

3. [ ] : Pipe sizes applicable to European installations are shown in parentheses.






# Dimensions

All measurements in mm.

FDCL280KXZE1, 335KXZE1

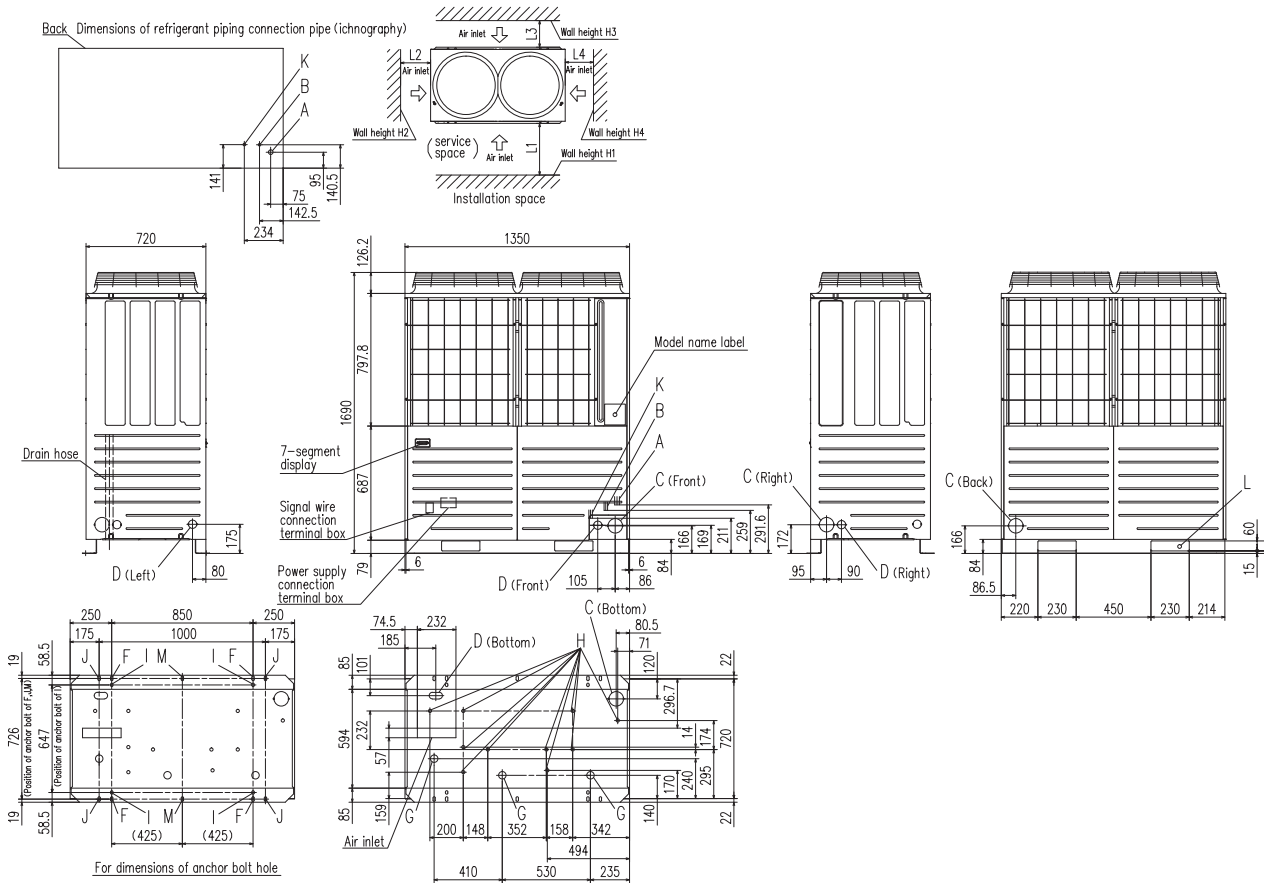


Mark	Content	280	335
A	Refrigerant gas piping connection pipe	ø22.22 (Brazing)	ø25.4 (Brazing)
B	Refrigerant liquid piping connection pipe	ø9.52 (Flare)	ø12.7 (Flare)
C	Refrigerant piping exit hole	ø88 (or ø100)	
D	Power supply entry hole	ø50 (Right · Left · Front), Long hole 40 x 80 (Bottom)	
F	Anchor bolt hole	M10 x 4 places	
G	Drain waste water hose hole	ø45 x 3 places	
H	Drain hole	ø20 x 10 places	
K	Refrigerant oil equalization piping connection pipe	ø9.52 (Flare)	
L	Carrying in or hole for hanging	230 x 60	

Installation example		
Dimensions	1	2
L <sub>1</sub>	500	Open
L <sub>2</sub>	10(30)	10(30)
L <sub>3</sub>	100	100
L <sub>4</sub>	10(30)	Open
H <sub>1</sub>	1500	Open
H <sub>2</sub>	No limit	No limit
H <sub>3</sub>	1000	No limit
H <sub>4</sub>	No limit	Open

In case the ambient temperature becomes 43°C or higher during cooling operation

## FDCL400KXZE1, 450KXZE1, 475KXZE1, 500KXZE1, 560KXZE1

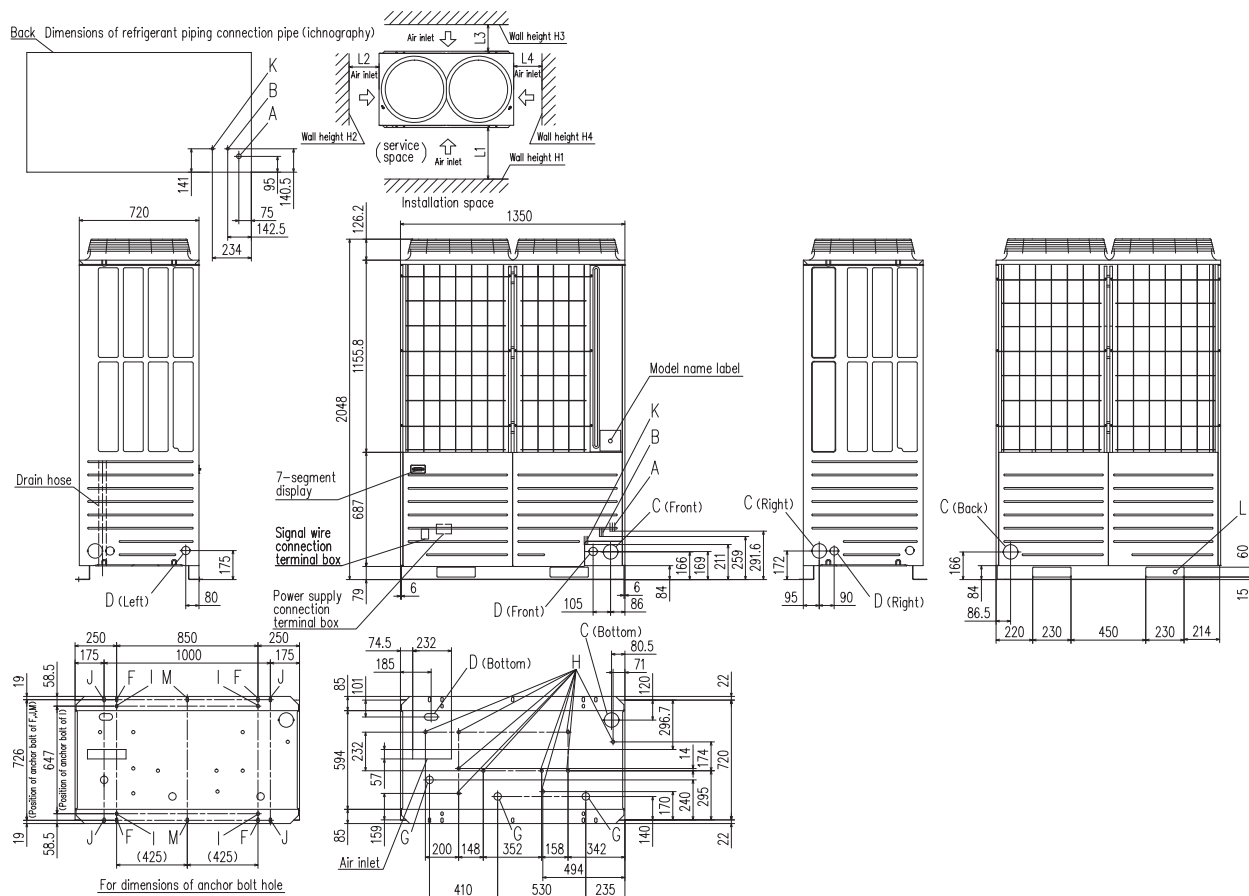

Mark	Content	400	450,475,500,560
A	Refrigerant gas piping connection pipe	ø25.4 (Brazing)	ø28.58 (Brazing)
B	Refrigerant liquid piping connection pipe	ø12.7 (Flare)	
C	Refrigerant piping exit hole	ø88 (or ø100)	
D	Power supply entry hole	ø50 (Right · Left · Front), Long hole 40 x 80 (Bottom)	
F	Anchor bolt hole	M10 x 4 places	
G	Drain waste water hose hole	ø45 x 3 places	
H	Drain hole	ø20 x 10 places	
K	Refrigerant oil equalization piping connection pipe	ø9.52 (Flare)	
L	Carrying in or hole for hanging	230 x 60	

Installation example		
Dimensions	1	2
L <sub>1</sub>	500	Open
L <sub>2</sub>	10(30)	10(30)
L <sub>3</sub>	100	100
L <sub>4</sub>	10(30)	Open
H <sub>1</sub>	1500	Open
H <sub>2</sub>	No limit	No limit
H <sub>3</sub>	1000	No limit
H <sub>4</sub>	No limit	Open

In case the ambient temperature becomes 43°C or higher during cooling operation



# Water cooled series

## 8~36HP (22.4~100.0kW)

Model No.	Nominal Cooling Capacity	Model No.	Nominal Cooling Capacity
FDC224KXZWE1	22.4kW	FDC730KXZWE1(FDC224×2+FDC280)	73.0kW
FDC280KXZWE1	28.0kW	FDC775KXZWE1(FDC224+FDC280×2)	77.5kW
FDC335KXZWE1	33.5kW	FDC850KXZWE1(FDC280×3)	85.0kW
FDC450KXZWE1(FDC224×2)	45.0kW	FDC900KXZWE1(FDC280×2+FDC335)	90.0kW
FDC500KXZWE1(FDC224+FDC280)	50.0kW	FDC950KXZWE1(FDC280+FDC335×2)	95.0kW
FDC560KXZWE1(FDC280×2)	56.0kW	FDC1000KXZWE1(FDC335×3)	100kW
FDC615KXZWE1(FDC280+FDC335)	61.5kW		
FDC670KXZWE1(FDC335×2)	67.0kW		

### Features

#### 1. High efficiency (EER/COP)

- Energy saving → Reduction of operation cost!

#### 2. Compact design

- Easy transportation and installation
- Elevator carrying

#### 3. BMS (Building Management System)

- Can use the same BMS as air-cooled KX
- Available to large-scale and fine control

#### 4. Serviceability & Maintenance

- Service and maintenance of main parts can be done from the front side only
- Useful service tools (Mente-PC, SL-Checker etc.)


### Applicable to

#### 1. High-rise Building

- 50m <FDC> , -100m <FDCH>
- 100m or higher in height <FDCW>

#### 2. Glass-exterior facade Building

- Possible to hide KXZW units and to keep fine sight



8, 10, 12HP



16, 18, 20, 22, 24HP



26, 28, 30, 32, 34, 36HP

## Specifications


Item	Model	FDC224KXZWE1	FDC280KXZWE1	FDC335KXZWE1	FDC450KXZWE1	FDC500KXZWE1	FDC560KXZWE1	FDC615KXZWE1	FDC670KXZWE1
Combination (FDC)		-	-	-	224KXZWE1	224KXZWE1	280KXZWE1	280KXZWE1	335KXZWE1
		-	-	-	224KXZWE1	280KXZWE1	280KXZWE1	335KXZWE1	335KXZWE1
Nominal horse power		8HP	10HP	12HP	16HP	18HP	20HP	22HP	24HP
Power source		3 Phase 380-415V, 50Hz							
Nominal capacity	Cooling	22.4	28.0	33.5	45.0	50.0	56.0	61.5	67.0
	Heating	25.0	31.5	37.5	50.0	56.0	63.0	69.0	75.0
Power consumption	Cooling	4.23	5.75	8.13	8.49	9.83	11.5	13.7	16.3
	Heating	4.24	5.10	6.30	8.47	9.27	10.2	11.4	12.6
EER	Cooling	5.3	4.9	4.1	5.3	5.1	4.9	4.5	4.1
COP	Heating	5.9	6.2	6.0	5.9	6.0	6.2	6.1	6.0
Exterior dimensions	HxWxD	mm 1100x780x550				mm (1100x780x550)x2			
Sound pressure level	dB(A)	48	50	52	50	52	53	54	55
Net weight	kg	185				185x2			

Item	Model	FDC730KXZWE1	FDC775KXZWE1	FDC850KXZWE1	FDC900KXZWE1	FDC950KXZWE1	FDC1000KXZWE1
Combination (FDC)		224KXZWE1	224KXZWE1	280KXZWE1	280KXZWE1	280KXZWE1	335KXZWE1
		224KXZWE1	280KXZWE1	280KXZWE1	280KXZWE1	335KXZWE1	335KXZWE1
		280KXZWE1	280KXZWE1	280KXZWE1	335KXZWE1	335KXZWE1	335KXZWE1
Nominal horse power		26HP	28HP	30HP	32HP	34HP	36HP
Power source		3 Phase 380-415V, 50Hz					
Nominal capacity	Cooling	73.0	77.5	85.0	90.0	95.0	100
	Heating	82.5	90.0	95.0	100	106	112
Power consumption	Cooling	14.2	15.5	17.5	19.5	21.7	24.3
	Heating	13.8	14.8	15.4	16.4	17.6	18.8
EER	Cooling	5.1	5.0	4.9	4.6	4.4	4.1
COP	Heating	6.0	6.1	6.2	6.1	6.0	6.0
Exterior dimensions	HxWxD	mm (1100x780x550)x3					
Sound pressure level	dB(A)	54	54	55	56	56	57
Net weight	kg	185x3					


The data is based on the rating condition:

Cooling: Indoor temp. of 27 °C DB, 19 °C WB, and heat source unit inlet water temp. of 30 °C, water flow rate 96 L/min  
 Heating: Indoor temp. of 20 °C DB, 15 °C WB, and heat source unit inlet water temp. of 20 °C, water flow rate 96 L/min

Heat source units on every floor  
- New building projects -

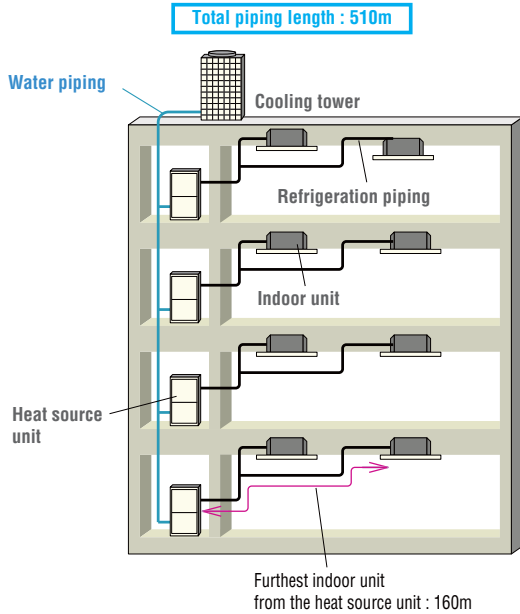


Heat source units in the machine room  
- Renovation projects -

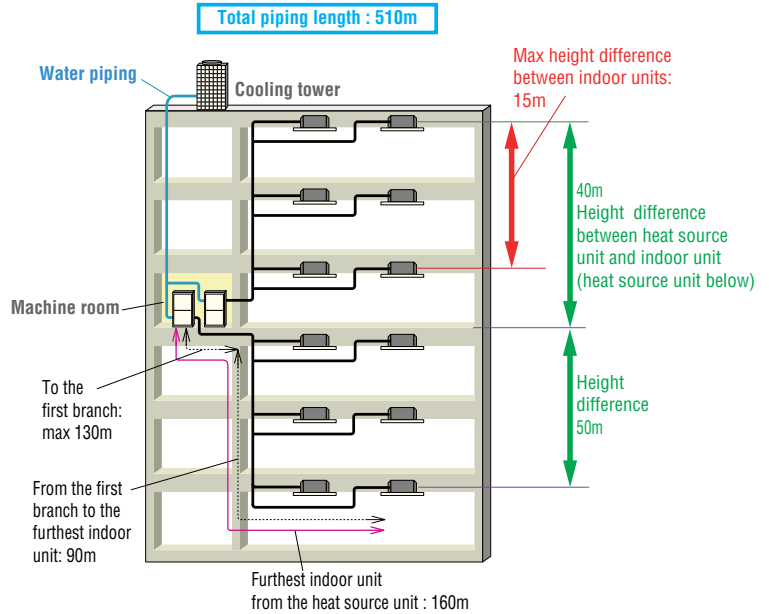

## Dimensions

All measurements in mm.

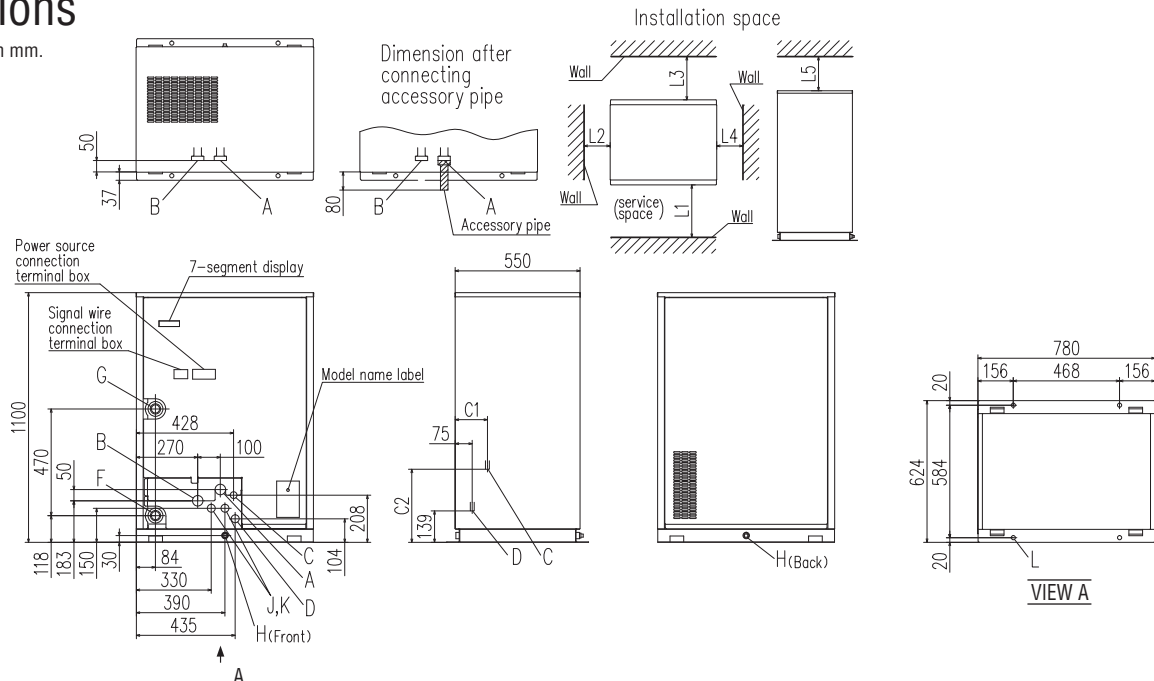

Mark	Content	
A	High/low gas line	Refer to piping size
B	-	Not to use.
C	Liquid line	Refer to piping size
D	Oil equalization line	
F	Water inlet	R1 1/4
G	Water outlet	R1 1/4
H	Drain outlet	Rp 1/2, 2places
J	Power source intake	ø35
K	Signal wiring intake	ø35
L	Anchor bolt hole	ø18, 4places

Dimension	FDC-KXZWE1	
	224,280	335
C1	142	139
C2	322	316
	Installation example 1	
Dimension	1	
L1	600 or more	
L2	20 or more	
L3	500 or more	
L4	20 or more	
L5	300 or more	

### Piping size

	FDC224KXZWE1	FDC280KXZWE1	FDC335KXZWE1	Connection method
High/low gas line	ø19.05	ø22.22	ø25.4	Flange
Liquid line	ø9.52	ø9.52	ø12.7	
Oil equalization line	ø9.52	ø9.52	ø9.52	Flare



# High Head series (90m) 14~48HP (40.0~136.0kW)

## Model No. Nominal Cooling Capacity

FDCH335KXE6-K <sup>**</sup>	33.5 kW
FDCH400KXE6	40.0 kW
FDCH450KXE6	45.0 kW
FDCH504KXE6	50.4 kW
FDCH560KXE6	56.0 kW
FDCH560KXE6-K <sup>**</sup>	56.0 kW
FDCH615KXE6	61.5 kW
FDCH680KXE6	68.0 kW

<sup>\*\*</sup> FDCH335KXE6-K & FDCH560KXE6-K are only used for combining with other models.

- Maximum allowable height difference between the outdoor and the indoor unit located at the lowest height position has been increased from 50m to 90m.  
(When the outdoor unit is located at higher position than the indoor unit)


## Model No. Nominal Cooling Capacity

FDCH735KXE6 (FDCH335-K+FDCH400)	73.5 kW
FDCH800KXE6 (FDCH400x2)	80.0 kW
FDCH850KXE6 (FDCH400+FDCH450)	85.0 kW
FDCH900KXE6 (FDCH450x2)	90.0 kW
FDCH960KXE6 (FDCH450+FDCH504)	96.0 kW
FDCH1010KXE6 (FDCH504x2)	101.0 kW
FDCH1065KXE6 (FDCH504+FDCH560)	106.5 kW
FDCH1130KXE6 (FDCH560x2)	113.0 kW
FDCH1180KXE6 (FDCH560-K+FDCH615)	118.0 kW
FDCH1235KXE6 (FDCH615x2)	123.5 kW
FDCH1300KXE6 (FDCH615+FDCH680)	130.0 kW
FDCH1360KXE6 (FDCH680x2)	136.0 kW


**FDCH335KXE6-K  
FDCH400KXE6  
FDCH450KXE6**




**FDCH504-680KXE6**

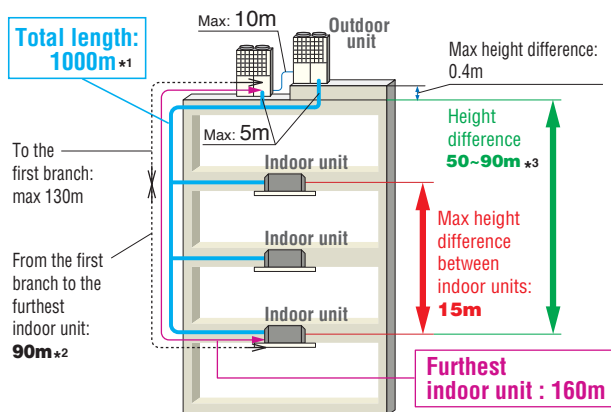

\*1 Select the total pipe length depending on the connectable capacity of indoor units.

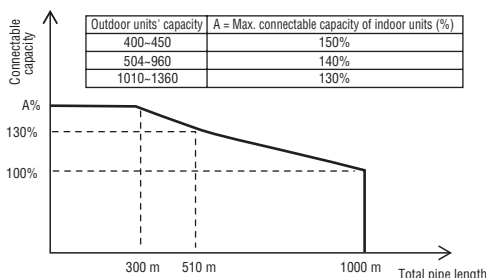

### Range of operation

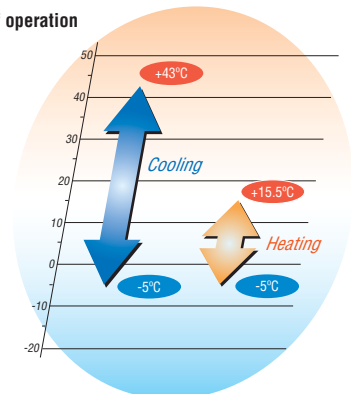

\*2 The difference between the longest and shortest indoor unit piping from the first branch must be within 40m.

\*3 In case of less than 50m, the High Head models can not be applied. In case Indoor unit is higher than outdoor unit, the High Head models can not be applied.

# Specifications

Item	Model	FDCH400KXE6	FDCH450KXE6	FDCH504KXE6	FDCH560KXE6	FDCH615KXE6	FDCH680KXE6
Nominal horse power		14HP	16HP	18HP	20HP	22HP	24HP
Power source		3 Phase 380-415V, 50Hz					
Nominal capacity	Cooling	kW	40.0	45.0	50.4	56.0	61.5
	Heating	kW	45.0	50.0	56.5	63.0	69.0
Electrical characteristics	Starting current	A	8				
	Power consumption	Cooling	kW	11.27	12.97	14.73	16.79
		Heating	kW	11.73	13.10	15.12	16.79
	Running current	Cooling	A	18.4-16.9	21.1-19.3	24.1-22.0	27.4-25.1
		Heating	A	19.6-17.9	21.7-19.9	25.2-23.1	28.0-25.7
Exterior dimensions	HxWxD	mm	1690x1350x720			2048x1350x720	
Net weight		kg	336		358		377
Refrigerant charge	R410A	kg	11.5				
Sound pressure level	Cooling / Heating	dB(A)	59.5 / 59.5	62.5 / 62.5	61.5 / 61.5	63.0 / 63.0	64.5 / 64.5
Refrigerant piping size	Liquid line	mm(in)	ø12.7(1/2")			ø15.88(5/8")	
	Gas line		ø25.4(1") [ø28.58(1 1/8")]			ø28.58(1 1/8")	
Capacity connection		%	50-150			50-140	
Number of connectable indoor units			36	40	36	40	44

Item	Model	FDCH735KXE6	FDCH800KXE6	FDCH850KXE6	FDCH900KXE6	
Combination (FDCH)		335KXE6-K	400KXE6	400KXE6	450KXE6	
Nominal horse power		400KXE6	400KXE6	450KXE6	450KXE6	
Power source		3 Phase 380-415V, 50Hz				
Nominal capacity	Cooling	kW	73.5	80.0	85.0	
	Heating	kW	82.5	90.0	95.0	
Electrical characteristics	Starting current	A	16			
	Power consumption	Cooling	kW	20.21	22.54	24.24
		Heating	kW	20.66	23.46	24.83
	Running current	Cooling	A	32.9-30.2	36.8-33.8	39.5-36.2
		Heating	A	34.4-31.4	39.2-35.8	41.3-37.8
Exterior dimensions	HxWxD	mm	1690x2700x720			
Net weight		kg	336x2			
Refrigerant charge	R410A	kg	11.5x2			
Refrigerant piping size	Liquid line	mm(in)	ø19.05(3/4")			
	Gas line		ø31.8(1 1/4") [ø34.92(1 3/8")]			
Capacity connection		%	50-140			
Number of connectable indoor units			53	58	61	

Item	Model	FDCH960KXE6	FDCH1010KXE6	FDCH1065KXE6	FDCH1130KXE6	
Combination (FDCH)		450KXE6	504KXE6	504KXE6	560KXE6	
Nominal horse power		504KXE6	504KXE6	560KXE6	560KXE6	
Power source		34HP	36HP	38HP	40HP	
Power source		3 Phase 380-415V, 50Hz				
Nominal capacity	Cooling	kW	96.0	101.0	106.5	
	Heating	kW	108.0	113.0	119.5	
Electrical characteristics	Starting current	A	16			
	Power consumption	Cooling	kW	27.70	29.46	31.52
		Heating	kW	28.22	30.24	31.91
	Running current	Cooling	A	45.2-41.3	48.2-44.0	51.5-47.1
		Heating	A	46.9-43.0	50.4-46.2	53.2-48.8
Exterior dimensions	HxWxD	mm	2048x2700x720			
Net weight		kg	336+358			
Refrigerant charge	R410A	kg	11.5x2			
Refrigerant piping size	Liquid line	mm(in)	ø19.05(3/4")		ø22.22(7/8")	
	Gas line		ø31.8(1 1/4") [ø34.92(1 3/8")]		ø38.1(1 1/2")	
Capacity connection		%	50-140		50-130	
Number of connectable indoor units			69	59	62	

Item	Model	FDCH1180KXE6	FDCH1235KXE6	FDCH1300KXE6	FDCH1360KXE6	
Combination (FDCH)		560KXE6-K	615KXE6	615KXE6	680KXE6	
Nominal horse power		615KXE6	615KXE6	680KXE6	680KXE6	
Power source		42HP	44HP	46HP	48HP	
Power source		3 Phase 380-415V, 50Hz				
Nominal capacity	Cooling	kW	118.0	123.5	130.0	
	Heating	kW	132.0	138.0	142.0	
Electrical characteristics	Starting current	A	16			
	Power consumption	Cooling	kW	37.16	40.74	45.35
		Heating	kW	35.27	36.96	37.56
	Running current	Cooling	A	60.5-55.4	66.2-60.6	73.4-67.2
		Heating	A	58.7-53.8	61.4-56.2	62.3-57.1
Exterior dimensions	HxWxD	mm	2048x2700x720			
Net weight		kg	377x2			
Refrigerant charge	R410A	kg	11.5x2			
Refrigerant piping size	Liquid line	mm(in)	ø22.22(7/8")			
	Gas line		ø38.1(1 1/2")			
Capacity connection		%	50-130			
Number of connectable indoor units			69	72	76	

1. The data are measured under the following conditions (ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.  
 2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

3. [ ] : Pipe sizes applicable to European installations are shown in parentheses.






# Dimensions

All measurements in mm.

FDCH335KXE6-K, 400KXE6, 450KXE6

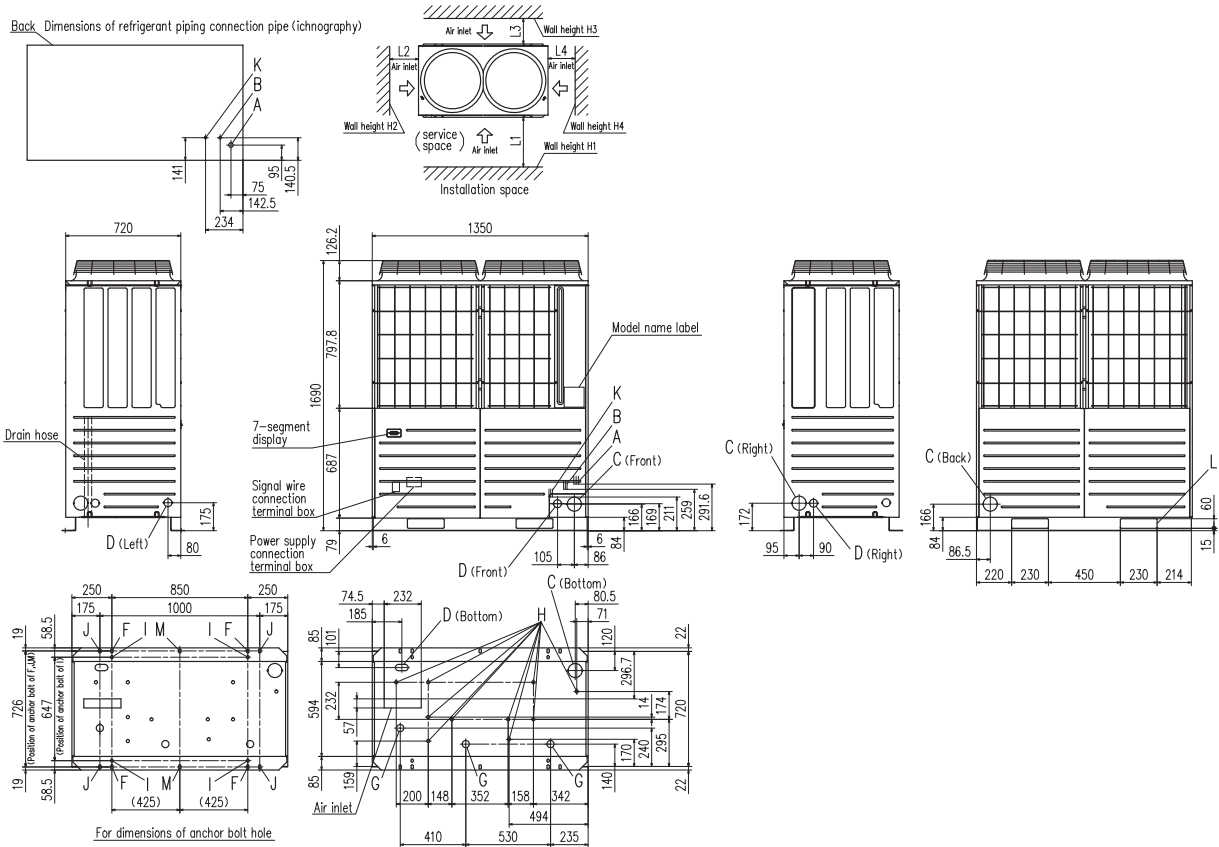


Mark	Content	335-K	400	450
A	Refrigerant gas piping connection pipe	ø25.4(Brazing)		ø28.58(Brazing)
B	Refrigerant liquid piping connection pipe	ø12.7(Flare)		
C	Refrigerant piping exit hole	ø88(or ø100)		
D	Power supply entry hole	ø50 (right · left · front), long hole 40 x 80 (under side)		
F	Anchor bolt hole	M10 x 4 places		
G	Drain waste water hose hole	ø45 x 3 places		
H	Drain hole	ø20 x 10 places		
K	Refrigerant oil equalization piping connection pipe	ø9.52(Flare)		
L	Carrying in or hole for hanging	230 x 60		

Installation example		
Dimensions	1	2
L <sub>1</sub>	500	Open
L <sub>2</sub>	10	10
L <sub>3</sub>	100	100
L <sub>4</sub>	10	Open
H <sub>1</sub>	1500	Open
H <sub>2</sub>	No limit	No limit
H <sub>3</sub>	1000	No limit
H <sub>4</sub>	No limit	Open

## Notes:

- The unit must be fixed with anchor bolts.
- Leave a 2m or larger space above the unit.
- The unit name plate is attached on the lower right corner of the front panel.
- The ports for refrigerant pipe and power cable penetrations are covered with half-blanks. Please cut off a half-blank with nippers in using these ports.
- Use a ø88 port for refrigerant pipe connection.
- Anchor holes marked "L J" (four holes for M10) are for a renewal installation.
- The oil-equalising pipe K should be used when outdoor units are used in combination. (For 14,16HP only)

## When more than one unit is installed

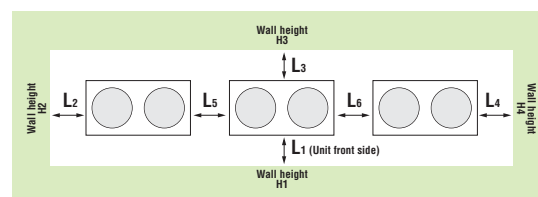


Installation example		
Dimensions	A	B
L <sub>1</sub>	500	Open
L <sub>2</sub>	10	200
L <sub>3</sub>	100	300
L <sub>4</sub>	10	Open
L <sub>5</sub>	0	400
L <sub>6</sub>	0	400
H <sub>1</sub>	1500	No limit
H <sub>2</sub>	No limit	No limit
H <sub>3</sub>	1000	No limit
H <sub>4</sub>	No limit	No limit

# Dimensions

All measurements in mm.

FDCH504KXE6, 560KXE6, 560KXE6-K, 615KXE6, 680KXE6

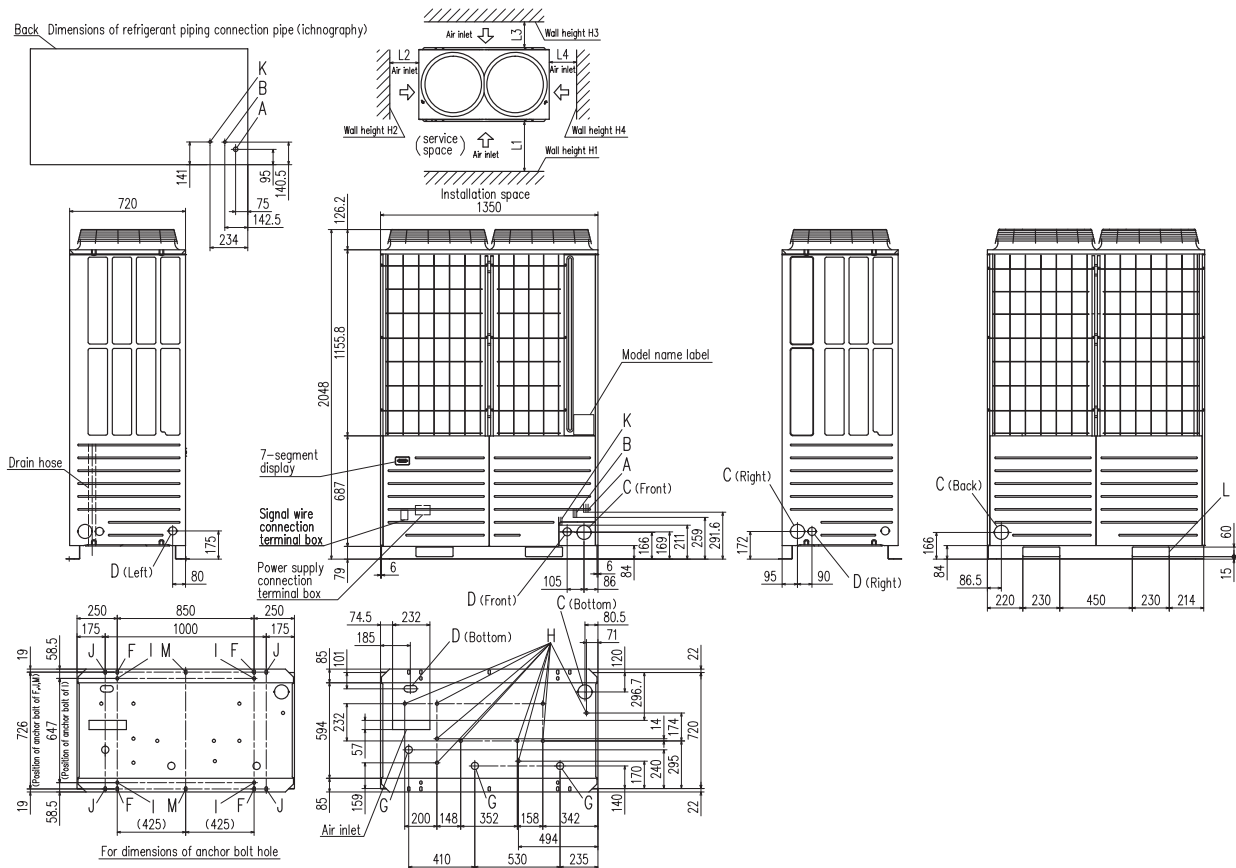

Mark	Content	
A	Refrigerant gas piping connection pipe	ø28.58(Brazing)
B	Refrigerant liquid piping connection pipe	ø12.7(Flare)
C	Refrigerant piping exit hole	ø88(or ø100)
D	Power supply entry hole	ø50 (right · left · front), long hole 40 x 80 (under side)
F	Anchor bolt hole	M10 x 4 places
G	Drain waste water hose hole	ø45 x 3 places
H	Drain hole	ø20 x 10 places
K	Refrigerant oil equalization piping connection pipe	ø9.52(Flare)
L	Carrying in or hole for hanging	230 x 60

Installation example		
Dimensions	1	2
L <sub>1</sub>	500	Open
L <sub>2</sub>	10	10
L <sub>3</sub>	100	100
L <sub>4</sub>	10	Open
H <sub>1</sub>	1500	Open
H <sub>2</sub>	No limit	No limit
H <sub>3</sub>	1000	No limit
H <sub>4</sub>	No limit	Open

## Notes:

- (1) The unit must be fixed with anchor bolts.
- (2) Leave a 2m or larger space above the unit.
- (3) The unit name plate is attached on the lower right corner of the front panel.
- (4) The ports for refrigerant pipe and power cable penetrations are covered with half-blanks. Please cut off a half-blank with nippers in using these ports.
- (5) Use a ø88 port for refrigerant pipe connection.
- (6) Anchor holes marked "L" (four holes for M10) are for a renewal installation.
- (7) The oil-equalising pipe K should be used when outdoor units are used in combination.



# Refresh outdoor units

If replacing a used unit with a new one, these units can reuse existing piping.




Model No.	Nominal Cooling Capacity
FDCR224KXE6	22.4kW
FDCR280KXE6	28.0kW



### <Option>

FDCR-KIT-E : Service valve kit

- Applies to a wide range of pipe sizes (R22, R407C, R410A standard size).
- Meets to a short period of renewal installation.
- Savings on replacement expenses such as scrapping waste material or procuring new pipe.
- Possible to replace the existing unit with a new larger capacity unit.
- Possible to replace plural systems with one system.  
For example: Existing 5HP x 2units can be replaced with a new 10HP x 1unit.

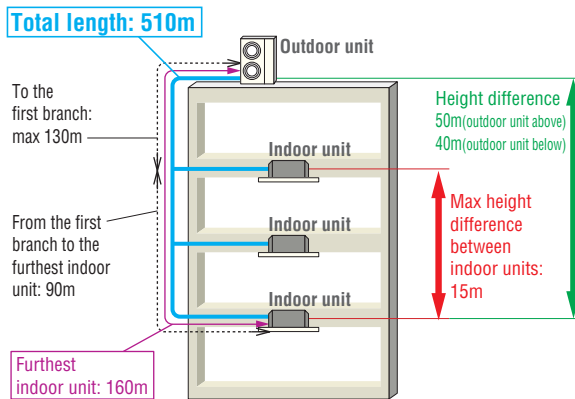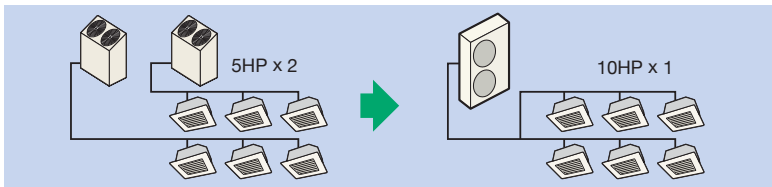

## Specifications

Item	Model	FDCR224KXE6	FDCR280KXE6	
Nominal horse power		8HP	10HP	
Power source		3 Phase 380-415V, 50Hz		
Nominal capacity	Cooling	22.4	28.0	
	Heating	25.0	31.5	
Electrical characteristics	Starting current	5		
	Power consumption	Cooling	5.60	8.09
		Heating	6.03	8.21
	Running current	Cooling	9.25-8.47	13.22-12.10
Heating		9.85-9.02	13.41-12.28	
Exterior dimensions	HxWxD	mm 1675x1080x480		
Net weight		kg 224		
Refrigerant charge	R410A	kg 11.5		
Sound pressure level	Cooling/Heating	dB(A) 58/58 59/60		
Refrigerant piping size	Liquid line	mm(in) $\phi 9.52(\frac{3}{8}) \sim \phi 15.88(\frac{5}{8})$		
	Gas line	mm(in) $\phi 19.05(\frac{3}{4}) \sim \phi 25.4(1")$ $\phi 22.22(\frac{7}{8}) \sim \phi 28.58(1\frac{1}{8})$		
Capacity connection	%	50~130		
Number of connectable indoor units		13	16	

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.  
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

## Advanced refresh function

### ◆ When the existing unit is operable

The existing pipe can be reused by cooling operation only.  
Pipe refresh kit and Service valve kit are not required.

1. Implement cooling operation of all indoor units for more than 30 minutes.
2. Implement pump-down after cooling operation.
3. Recover refrigerant and remove the existing outdoor unit and indoor unit.

### ◆ When the existing unit is not operable

The existing pipe can be reused by washing operation after connecting Refresh outdoor units, Pipe refresh kit and Service valve kit.


Connecting and removing of Refresh outdoor units and Pipe refresh kit is very easy by use of flexible pipe and flanges.

1. Pipe washing operation is implemented by changing dip switch on the outdoor unit PCB.
2. Completing washing is monitored via 7-segment display on the outdoor unit PCB.
3. As washing operation is about 60 minutes, it can meet to a required short period of renewal installation.

7-segment display




Pipe refresh kit (FDCR-KIT-E)

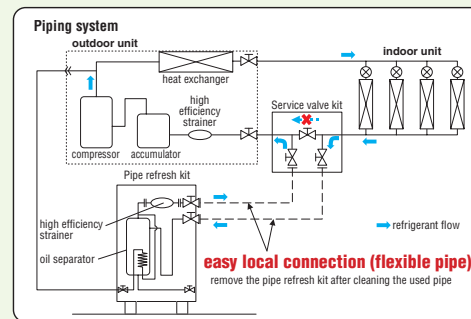


## Dimensions

All measurements in mm.

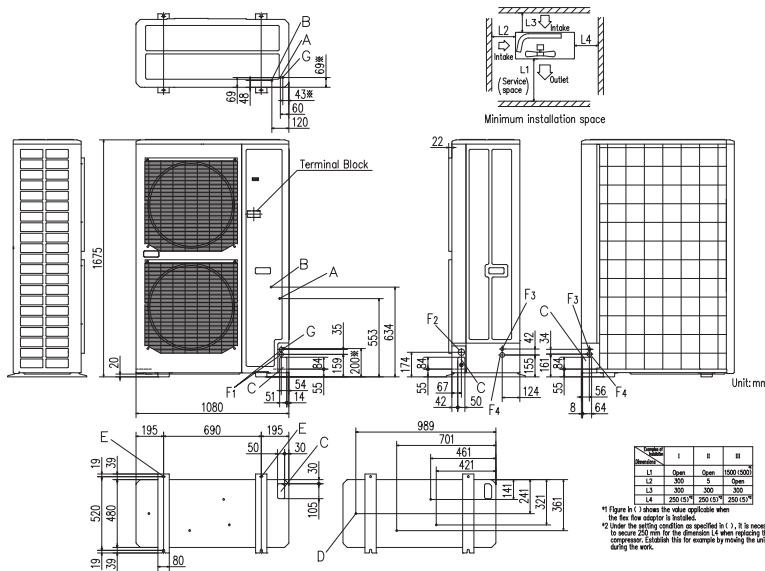

Service valve kit

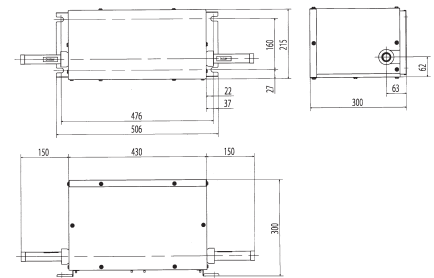

Mark	Item	
A	Service valve connection of the attached connecting pipe (gas side)	ø19.05 (3/4") (Flare)
B	Service valve connection (liquid side)	ø12.7 (1/2) (Flare)
C	Pipe/cable draw-out hole	4places
D	Drain discharge hole	ø20 × 4places
E	Anchor bolt hole	M10 × 4places
F1	Cable draw-out hole	ø30
F2	Cable draw-out hole	ø45
F3	Cable draw-out hole	ø22
F4	Cable draw-out hole	ø34
G	Connecting position of the local pipe. (gas side)	ø25.4 (1") (Brazing)

Notes:

- (1) It must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction.
- (4) Leave 1m or more space above the unit.
- (5) A wall in front of the blower outlet must not exceed the units height.
- (6) The model name label is attached on the lower right corner of the front.
- (7) Connect the Service valve with local pipe by using the pipe of the attachment. (Gas side only)
- (8) Mark ※ shows the connecting position of the local pipe. (Gas side only)



# Mitsubishi Heavy Industries **KXZ** /further information

Mitsubishi Heavy Industries operates a continuous CSR (Corporate Social Responsibility) policy, with a role to realise a sustainable society through it's various areas of business.

## Creed

- We strongly believe that the customer comes first and that we are obliged to be an innovative partner to society.
- We base our activities on honesty, harmony, and a clear distinction between public and private life.
- We shall strive for innovative management and technological development from an international perspective.

## Reason for Instituting the Creed


In Japan there are many enterprises with their own "creeds" which simply represent their management concept.

Mitsubishi Heavy Industries, Ltd. has a creed of this type, also. It was instituted in 1970 on the basis of the policy advocated by Koyata Iwasaki, president of Mitsubishi Goshi Kaisha in the 1920's, to indicate the essential attitude of the company, the mental attitude of the employees, and the future directions of the company.


The reason for instituting the present creed is so that all of us can call to mind our one hundred years of tradition, and strive for further development in the future.

*Issued 1 June 1970*

MHI's creed was established based on "The Three Corporate Principles" shared by the Mitsubishi Group from the company's beginnings. In the spirit of this creed, MHI continues its efforts to fulfil its three corporate social responsibilities (CSRs): "corporate governance and compliance," "the environment, human rights and labour," and "contribution to society through business activities."

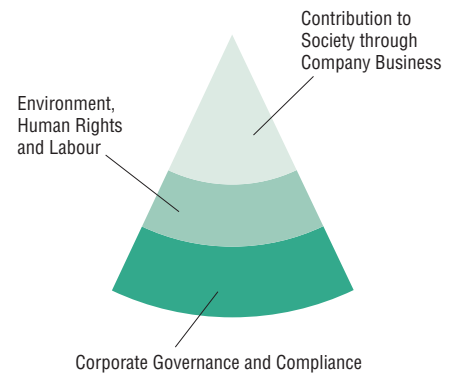

## Contribution to Society through Company Business

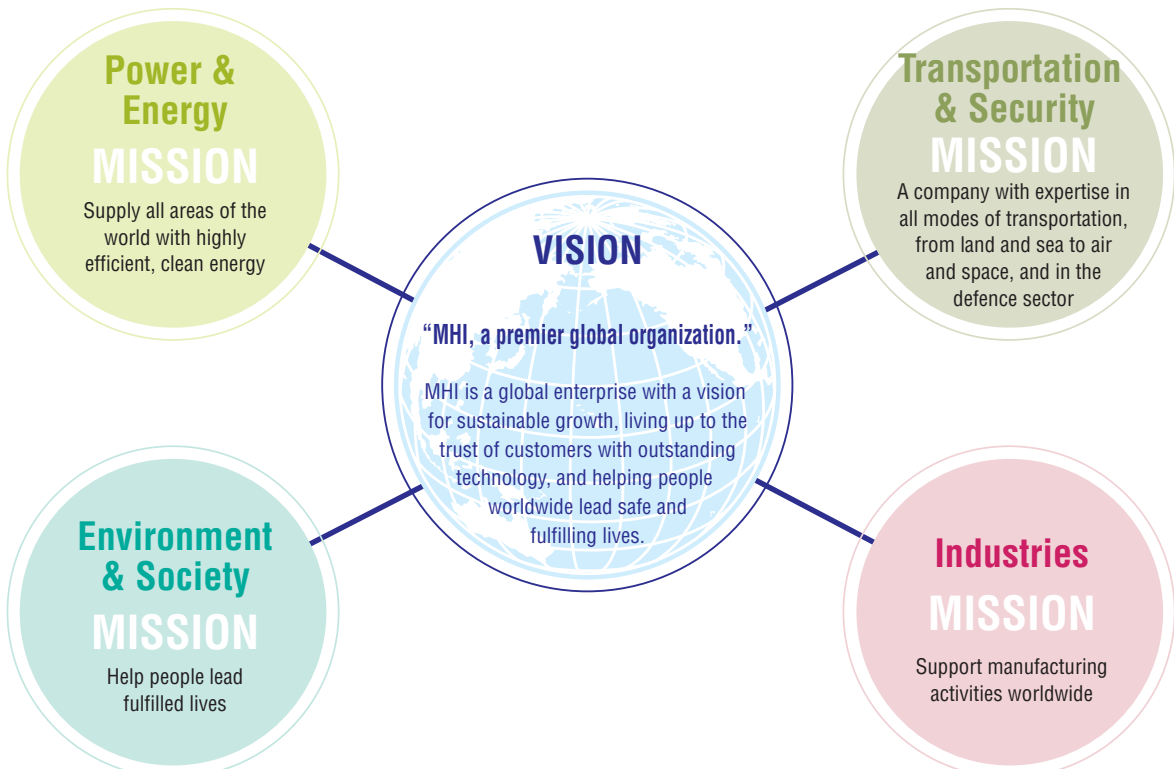

The KXZ product range has been developed in compliance with the Mitsubishi Heavy Industries Policy on the Environment.


**In order to make the sustainable development of society possible, a basic policy on environmental matters has been established.**

Pursuant to the express provision of Section 1 of its creed that “We strongly believe that customers come first and that we are obligated to be an innovative partner to society,” MHI shall, as a matter of primary importance, strive, through its R&D, manufacturing and other business activities, to play a useful role in the development of society. To this end, while remaining aware that a business enterprise is a member of society, MHI shall endeavour, in all aspects of its business activities, to reduce the burden on the environment and shall concentrate and fully utilise its technological capabilities for the development of technologies and products that will protect the environment, thus contributing to the establishment of a society in which sustainable development is possible.

**In order to realise its basic policy, MHI has set the following seven conduct guidelines.**

1. Recognise that environmental protection is top priority in the company’s operations, and encourage the entire company in its endeavours to protect and improve the environment.
2. Define roles and responsibilities regarding environmental protection by developing and maintaining a corporate organization designated for environmental protection, and create and implement corporate policies and procedures on environmental matters.
3. Endeavour to reduce the burden on the environment by preventing pollution, saving resources, saving energy, reducing waste, reusing materials, and recycling in all aspects of the company’s business activities in R&D, designing, procurement of materials, manufacturing, transportation, use, service and disposal.
4. Endeavour to develop and provide advanced, highly reliable, unique technologies and products that contribute to solving environmental and energy problems.
5. Comply with national and local environmental laws and regulations, beyond mere compliance by enacting, implementing and evaluating voluntary standards where necessary, and to endeavour to continuously improve and promote environmental protection activities by establishing environmental goals and targets.
6. Endeavour to protect the environments of foreign countries by carefully examining the consequences of the company’s overseas business operations and the exportation of its products, and to become actively involved in technological co-operation overseas in areas of environmental protection.
7. Provide environmental training and other programs to enhance the environmental awareness of all company employees, and take steps to expand public relations activities, such as providing environment-related information to the public and social contribution activities.

**Number of offices/plants by region (Consolidated)** as of May, 2014

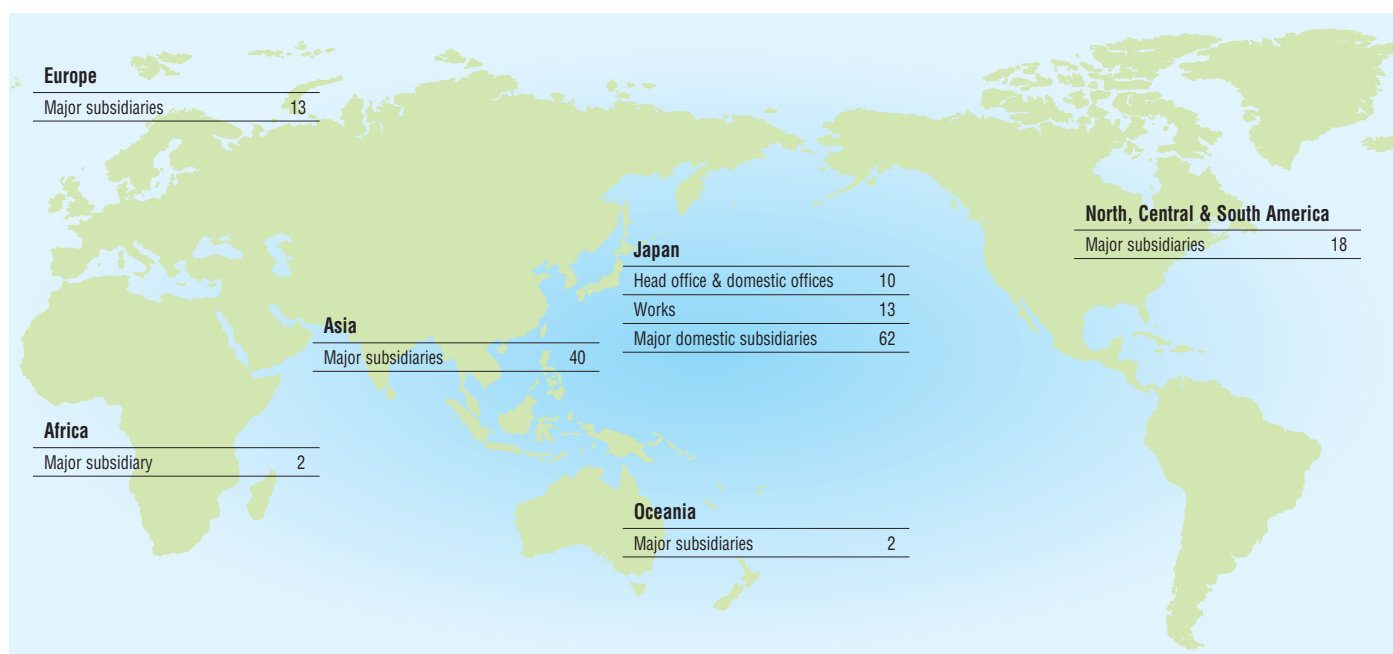




On the land and sea, in the sky and even in space, MHI's stage of operations is expanding limitlessly. We manufacture more than 700 different products which support various industrial and civil activities in both domestic and international markets.

Ships, steel structures, power systems, machinery for both industrial and general use, air-conditioners, pollution reduction and environmental control systems, aerospace systems – the MHI product lines which create rich and comfortable living environments, are as harmonious as an orchestra.

What creates this harmony is MHI's general technological expertise developed over more than a century of hard work. We are highly esteemed in the world for providing high


quality products through untiring technological research and development. From new energy development and environmental concerns to the exploration of space, with the advent of the 21st century MHI is confronting a variety of issues to ensure the realisation of a society in which there is harmony between mankind and technology.



- Ultra-High Steel Stacks
- Refuse Incineration Plants
- Night Soil Treatment Plants
- Electrostatic Precipitators
- Flue Gas Desulfurization System
- Fluidized Incinerators
- CFC Collecting Equipment



- Crude Oil Storage Barges
- LNG Tanks
- Boilers & Turbines
- Oil Production Plants
- Contra-Rotating Propellers
- Thermal Power Plants
- Combined Cycle Plants
- Fuel Cells
- Water Turbines
- Wind Turbines
- Geothermal Power Plants
- PWR Nuclear Power Plants
- Uranium Enrichment Equipment
- FBRs
- Co-Generation Systems

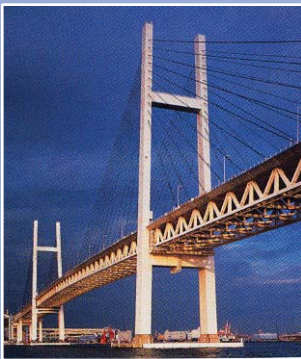

- Spillway Radial Gates
- Steel Bridges
- Penstocks
- Desalination Plants
- Physical Distribution Equipment
- Engines



- Unloader & Container Cranes
- Mechanical Parking Facilities
- Integrated Automated Storage Systems
- Rubber & Tyre Machinery
- Skyrails
- Monorail Cars
- New Transportation Systems
- Passenger Boarding Bridges

- Toll Collection Machine Systems
- Forklift Trucks
- Helicopters
- Aircraft
- Railway Maintenance Equipment
- LNG Carrier
- Container Ships



(C) Mitsubishi Aircraft Corporation

LOCAL DEVELOPMENT  
TRANSPORTATION  
ENVIRONMENT  
RESOURCES/ENERGY



- Chemical Plants
- Wind Tunnel/Experiment Equipment
- Casting Machines
- Strip Mill
- Cement Plant
- Stepless Variable Speed Gears
- Industrial Robots
- Injection Moulding Machines
- Pulp & Paper Machinery
- Corrugation Machines
- Box Making Machines
- Machine Tools



- Ceiling Recess Packaged Air Conditioners
- Automotive Air Conditioners
- Residential Use Split Air Conditioners
- Refrigeration Units
- Dry Cleaning Machines
- Food Machinery
- Cruise Ships
- Multi-purpose Dome
- Stage Machinery Systems



- Cable Layer
- Printing Machinery



- Oceanographic Research Ships
- Deep Submergence Research Vehicles
- Communications Satellite Rockets
- Space Transportation
- Rockets & Engines



**INDUSTRIAL**

**LEISURE/LIFESTYLE**

**INFORMATION SYSTEM**

**DEVELOPMENT**

**DEFENCE**

- Submarines
- Naval Vessels
- Jet Fighters
- Helicopters
- Missiles
- Tanks & Infantry Fighting Vehicles

## Before starting use

### Heating performance

The heating performance values (kW) described in catalogue are the values obtained by operating at an outdoor temperature of 7°C and indoor temperature of 20°C as set forth in the ISO Standards. As the heating performance decreases as the outdoor temperature drops, if the outdoor temperature is too low and the heating performance is insufficient, use other heating appliances as well.

### Indication of sound values

The sound values are the values (A scale) measured in a chamber such as an anechoic chamber following the ISO Standards. In the actual installation state, the value is normally larger than the values given in the catalogue due to the effect of surrounding noise and echo. Take this into consideration when installing.

### Use in oil atmosphere

Avoid installing this unit in an atmosphere where oil scatters or builds up, such as in a kitchen or machine factory. If the oil adheres to the heat exchanger, the heat exchanging performance will drop, mist may be generated, and the synthetic resin parts may deform and break.

### Use in acidic or alkaline atmosphere

If this unit is used in acidic atmosphere such as hot spring areas having high level of sulfuric gases or in alkaline atmosphere including ammonia or calcium chloride, places where the exhaust of the heat exchanger is sucked in, or at coastal areas where the unit is subject to salt breezes, the outer plate or heat exchanger, etc., will corrode. Please ask a dealer or specialist when you use an air conditioner in places differing from a general atmosphere.

### Use in places with high ceilings

If the ceiling is high, install a circulator to improve the heat and air flow distribution when heating.

### Refrigerant leakage

The refrigerant (R410A) used for Air conditioner is non-toxic and inflammable in its original state.

However, in consideration of a state where the refrigerant leaks into the room, measures against refrigerant leaks must be taken in small rooms where the tolerable level could be exceeded. Take measures by installing ventilation devices, etc.

### Use in snowy areas

Take the following measures when installing the outdoor unit in snowy areas.

#### •Snow prevention

Install a snow-prevention hood so that the snow does not obstruct the air intake port or enter and freeze in the outdoor unit.

#### •Snow piling

In areas with heavy snow fall, the piled snow could block the air intake port. In this case, a frame that is 50cm or higher than the estimated snow fall must be installed underneath the outdoor unit.

### Automatic defrosting device

If the temperature is low, and the humidity is high, frost will stick to the heat exchanger of the outdoor unit. If use is continued, the heating performance will drop.

The "Automatic defrosting device" will function to remove this frost.

After heating for approx. three to ten minutes, it will stop, and the frost will be removed. After defrosting, hot air will be blown again.

### Servicing the air-conditioner

After the air-conditioner is used for several seasons, dirt will build up in the air-conditioner causing the performance to drop. In addition to regular servicing, we recommend the maintenance contract (charged for) by a specialist.

## ⚠ Safety Precautions

### Air-conditioner usage target

The air-conditioner described in this catalogue is a dedicated cooling/heating device for human use.

Do not use it for special applications such as the storage of foodstuffs, animals or plants, precision devices or valuable art, etc.

This could cause the quality of the items to drop, etc.

Do not use this for cooling vehicles or ships. Water leakage or current leaks could occur.

### Before use

Always read the "User's Manual" thoroughly before starting use.

### Installation

Always commission the installation to a dealer or specialist. Improper installation will lead to water leakage, electric shocks and fires.

Make sure that the outdoor unit is stable in installation. Fix the unit to stable base.

### Usage place

Do not install in places where combustible gas could leak or where there are sparks.

Installation in a place where combustible gas could be generated, flow or accumulate, or places containing carbon fibers could lead to fires.



Mitsubishi Heavy Industries, Ltd.  
Air-Conditioning & Refrigeration Division  
Machinery Equipment & Infrastructure  
16-5, Konan 2-chome, Minato-ku, Tokyo, 108-8215 Japan  
<http://www.mhi.co.jp>

### Our factories are ISO9001 and ISO14001 certified.

#### Certified ISO 9001



BIWAJIMA PLANT  
Mitsubishi Heavy Industries, Ltd.  
Air-conditioning & Refrigeration Systems Headquarters



MITSUBISHI HEAVY INDUSTRIES-  
MAHAJAK AIR CONDITIONERS CO., LTD.



Mitsubishi Heavy  
Industries-Halter (Quingdao)  
Air-conditioners Co., Ltd.

#### Certified ISO 14001



BIWAJIMA PLANT  
Mitsubishi Heavy Industries, Ltd.  
Air-conditioning & Refrigeration Systems Headquarters



MITSUBISHI HEAVY INDUSTRIES-  
MAHAJAK AIR CONDITIONERS CO., LTD.



Mitsubishi Heavy  
Industries-Halter (Quingdao)  
Air-conditioners Co., Ltd.

